MILITARY SPECIFICATION

MICROCIRCUIT, DIGITAL, DECODER, LOGIC ARRAY

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for a Class B, Monolithic, Silicon, CMOS, Decoder, Logic Array, Programmable, Digital Microcircuit.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of Department of Defense Index of Specifications and Standards (DODSIS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-M-38510	- Microcircuits, General Specification For.
MIL-A-48078	- Ammunition, Standard Quality Assurance Provisions, General Specification for.
MIL-M-55565	- Microcircuits, Packaging of.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables For Inspection by Attributes
MIL-STD-130	- Identification marking of U.S. Military Property
MIL-STD-883	- Test Methods and Procedures for Microelectronics

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Armament, Munitions and Chemical Command, Attn: AMSMC-QA, Dover, New Jersey 07801-5001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1345
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents form a part of this specification to the extent herein.

DRAWINGS

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

PRODUCT AND PACKAGING DRAWINGS

9333602	- Microcircuit, Digital, Decoder, Logic Array
9355161	- Test Specifications
1900096-201	- Decoder, Logic Array Schematic Diagram (Secret)

(Copies of specifications, standards, drawings and publications required by the suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references dated herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Device classification. The microcircuit (device) shall conform to the product assurance level Class B of MIL-M-38510 and as specified on drawing.

3.2 Device. The device shall comply with all requirements specified on Drawing 1900096-201 and with all requirements specified in applicable specifications and standards and as specified herein.

3.2.1 Design and manufacturing. Supplier's implementation of design, processing, manufacturing equipment and materials instructions in accordance with MIL-M-38510, Appendix A, as well as rebonding and rework criteria in accordance with applicable paragraph of MIL-STD-38510 are subject to review and approval by the procuring activity. Paragraphs of MIL-M-38510 concerning (a) line certification, (b) product assurance program plan, and (c) initial and periodic qualification, are not applicable.

3.2.2 Design and construction.

(1) Physical dimensions shall be in accordance with drawing 9333602.

(2) Pin assignments shall be as shown in Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

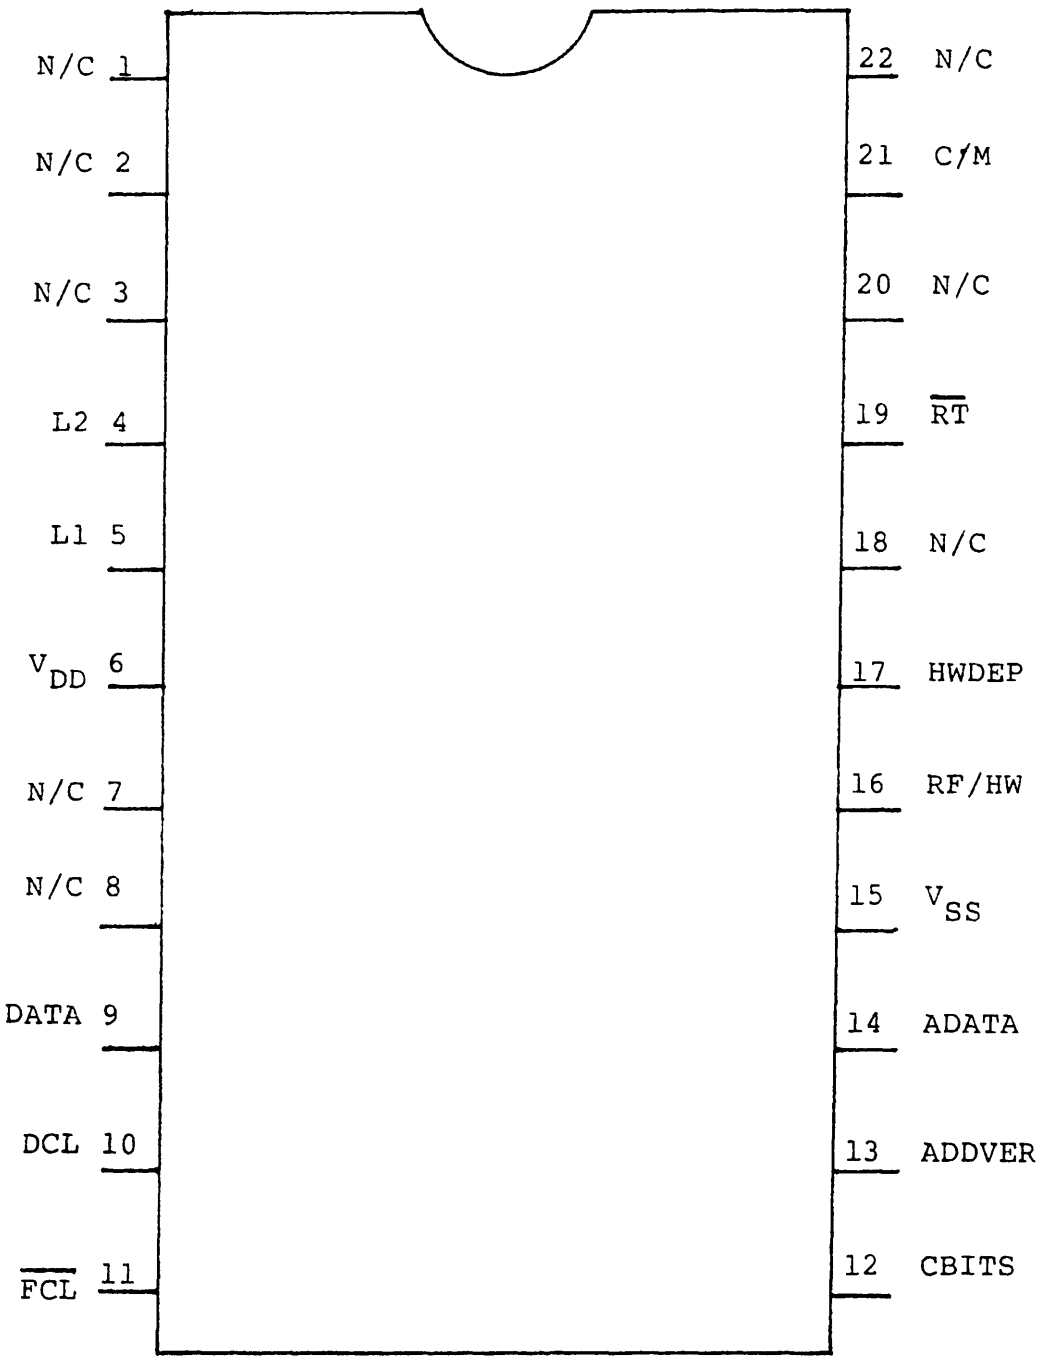


FIGURE 1. PIN ASSIGNMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:35Z
Check the source to verify that this is the current version before use.

(3) Lead Finish: A, B or C in accordance with MIL-M-38510.

(4) Electrostatic Sensitive (ESD) Protection: Pins 4, 5, 9, 10, 11, 16, 17, 19, and 21 shall be internally protected.

*CAUTION: These items are susceptible to breakdown resulting from Electrostatic Discharge. Every precaution should be taken during parts handling, installing, and testing to prevent static charge buildups.

3.3 Inputs/outputs. The component pin numbers are related to the inputs/outputs mneumanics as shown in Figure 1.

3.3.1 Function descriptions of pin assignments. Function description of pin assignments are described in Dwg. 9333602.

3.4 Environmental and mechanical. Devices to be delivered under this specification shall be capable of meeting the following MIL-STD-883 environmental and mechanical tests when the devices are subjected to these tests in accordance with this specification.

Environmental Tests	Method	Conditions
Moisture resistance	1004	
Steady state life	1005	D, 1000 hrs @ 125°C
Temperature cycling	1010	C, 10 cycles
High temperature storage	1008	C
Seal (Fine and Gross)	1014	(A or B & C) respectively
Burn-in	1015	D, 168 hours @ 125°C

Mechanical Tests	Method	Conditions
Constant acceleration	2001	E, Y1 orientation only
Mechanical shock	2002	B
Solderability	2003	
Lead integrity	2004	B2
Resistance to solvents	2015	
Vibration, variable frequency	2007	A
External visual	2009	
Internal visual	2010	B
Bond strength	2011	D
Physical dimensions	2016	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

3.5 Electrical performance requirements. The device shall have the following electrical characteristics.

3.5.1 Absolute maximum ratings. The component absolute maximum ratings shall be in accordance with value specified in Table I.

TABLE I. Maximum Ratings

DC Supply Voltage, Pin 6 with respect to Pin 15, V_{DD1}	8.0 V_{DC}
Input Voltage Range All Inputs except Pins 4 and 5, V_I	-0.5 to V_{DD} +0.5
Operating Temperature Range, T_A	-37° to +57°C
Storage Temp. Range, T_{STG}	-55 to +125°C
Input Current Pins 4 and 5, I_I	±10 mA
DC Supply Voltage Range-Component Operational, V_{DD}	+4.5 to 7.0 VDC

3.5.2 Operating conditions (Inputs). The components shall be operational in the conditions specified in Table II of Dwg. 9333602.

TABLE II. Operating Conditions
see Dwg. 9333602

3.5.3 Electrical performance characteristics. The component shall meet the electrical performance characteristics specified in Table III.

TABLE III. Electrical Performance Characteristics 1/

PARAMETER	CONDITIONS	VALUES MIN	VALUES MAX	UNITS
Input Current All Inputs Except Pin 16,17,19 & 21	V_{DD}=7.0 V_I = V_{DD}		1	uA
	V_I = V_{SS}		-1	uA
	See Figure 3			

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

TABLE III. Electrical Performance Characteristics 1/ (Cont'd)

PARAMETER	CONDITIONS	VALUES MIN	VALUES MAX	UNITS
Input Current RF/HW (Pin 16)	V_{DD}=7.0 V_I = C_{DD1}		1	uA
	V_I = V_{SS}	-5	-15	uA
	See Figure 3			
Input Current HW/DEP (Pin 17) C/M (Pin 21)	V_{DD}=7.0 See Figure 3			
	V_I = V_{DD}	5	15	uA
	V_I = V_{SS}		-1	uA
Input Current RT (Pin 19)	V_{DD}=7.0 2/ See Figure 3			
	V_I = V_{SS}		-1	uA
	V_I = V_{DD}		1	uA
	V_{DD}=7.0 3/ See Figure 3			
	V_I = V_{SS}	-50	-100	uA
Input Diode Voltage - All Inputs Except Pins 4 & 5	V_{DD}=V_{SS} = 0 I_I = 100 uA See Figure 4		1.0	V
Input Diode Voltage - L1 & L2 (Pins 4 & 5)	V_{DD}=V_{SS} = 0 See Figure 4a			
	I_I = +5 mA		1.5	V
	I_I = -5 mA		-1.5	V
Operating Current	V_{DD}=7.0 See Figure 5 of Dwg. 9333602	40	1000	uA
Sequential Performance 2/	4.5V _ V_{DD} _ 7.0 V	-	-	-

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:35Z
Check the source to verify that this is the current version before use.

TABLE III. Electrical Performance Characteristics 1/ (Cont'd)

PARAMETER	CONDITIONS	VALUES MIN	VALUES MAX	UNITS
Positive Trigger Threshold L1 & L2	$4.5V \leq V_{DD} \leq 7.0$ V See Figure 5	$0.8V_{DD}$	-	Volts
Negative Trigger Threshold L1 & L2	$4.5V \leq V_{DD} \leq 7.0$ V See Figure 5		$0.2V_{DD}$	Volts
Power on Reset Holdoff RT (Pin 19)	$4.5V \leq V_{DD} \leq 7.0$ V		1.3	Volts
Component Enable RT (Pin 19)	$4.5 \leq V_{DD} \leq 7.0$ V	$0.8V_{DD}$	-	Volts
Component Disable Holdoff RT (Pin 19)	$4.5V \leq V_{DD} \leq 7.0$ V	$0.5V_{DD}$	-	Volts

1/ Unless otherwise specified, $-37^{o}C \leq T_A \leq +57^{o}C$.

2/ Sequence of test is important, V_I must be held at V_{SS} during power on and $V_I = V_{SS}$ be tested first.

3/ V_I must be lowered to V_{SS} from the V_{DD} level after power on.


3.5.4 Output requirements. See Section 2(c)(4) of Dwg. 9333602.

3.6 Solderability. External leads must be acid tin electroplated or solder dipped per MIL-M-38510, paragraph 3.5.6.2(a) or (b) and if acid tin electroplated, the minimum plating must be 150 microinches. Parts must also be solderable per MIL-STD-883, Method 2003.1.

3.7 Screening. All devices shall be 100% screened in full accordance with MIL-STD-883, Method 5004, Class B. Burn-in circuit shall be as shown in Figure 6 herein, or equivalent.

3.7.1 Pre-burnin electrical tests. Pre-Burnin Electrical Tests shall be done in accordance with Section D(1) of Dwg. 9333602.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

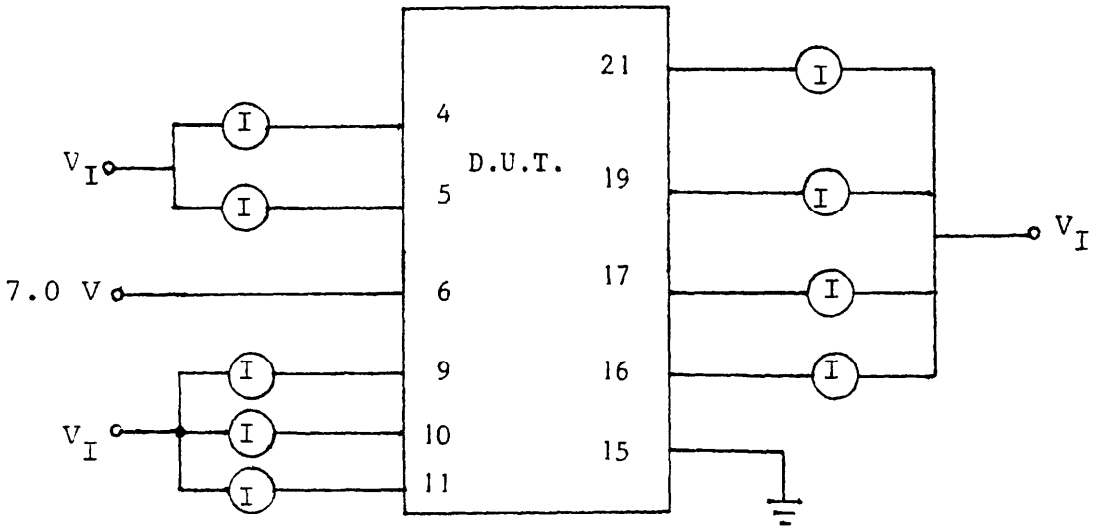

NOTE: Only the pin being measured need have a current meter. For all other inputs not being measured, the current meter may be replaced by an open circuit except pins 4, 5, 9, 10 and 11, which shall be held at V_{SS}.

FIGURE 3. INPUT CURRENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

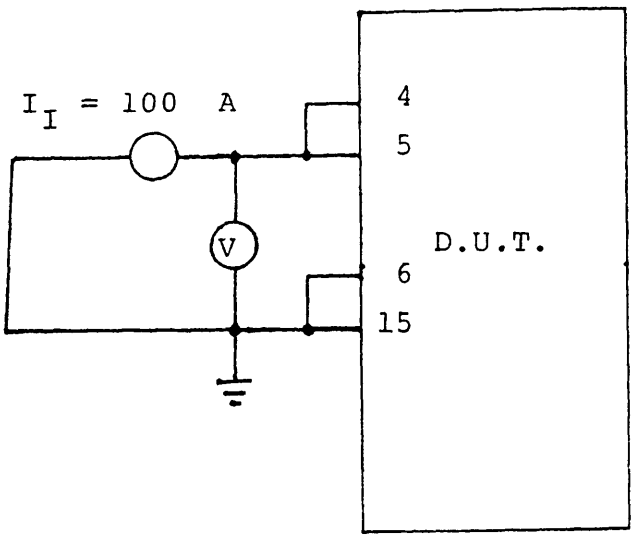


FIGURE 4. INPUT DIODE TEST CIRCUIT

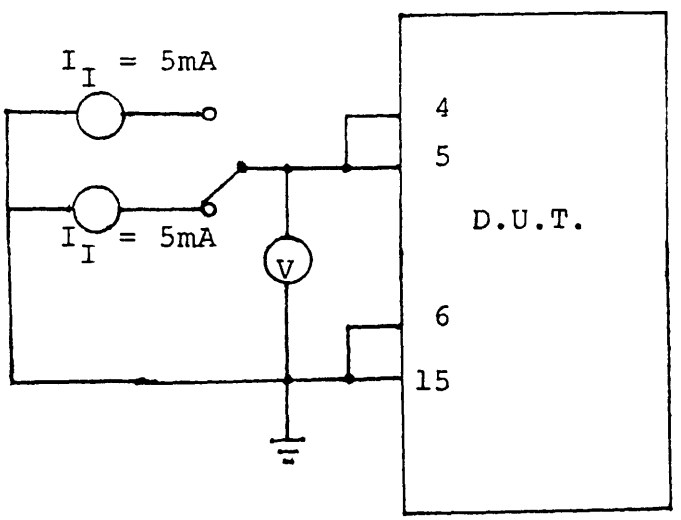


FIGURE 4a. INPUT DIODE TEST CIRCUIT

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

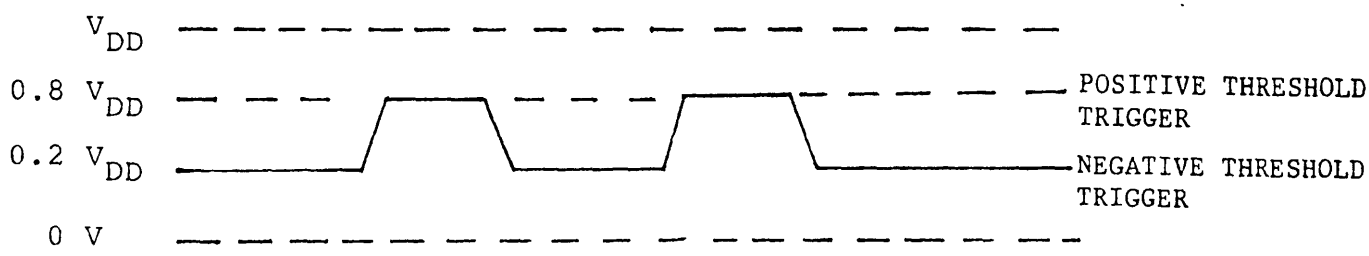


FIGURE 5. TRIGGER THRESHOLD INPUT WAVEFORM AT L1/L2

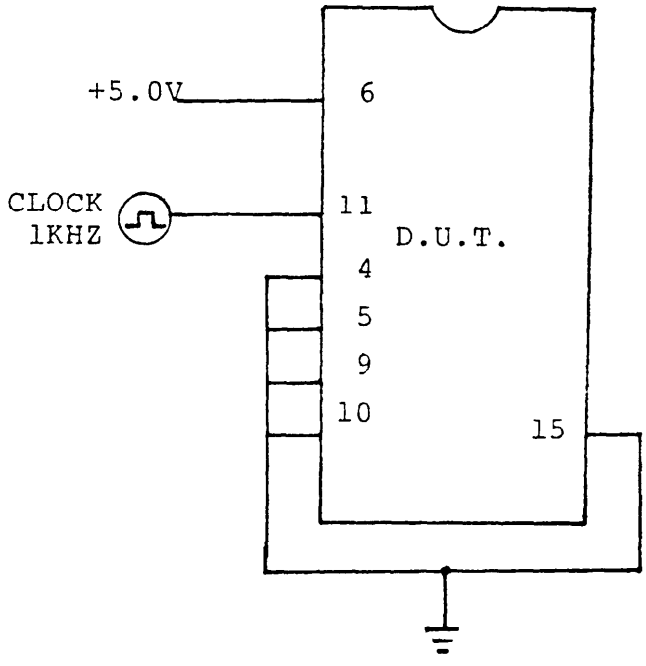


FIGURE 6. BURN-IN CIRCUIT

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

3.7.2 Final electrical tests. Final Electrical Tests shall be done in accordance with Section D(2) of Dwg. 9333602.

3.8 Part marking. Only parts having met all requirements herein shall be marked with the following information in accordance with MIL-M-38510:

(a) Manufacturer's name or symbol.

(b) Manufacturer's date code (traceable to the wafer manufacturer's diffusion run) .

(c) The source control number "1920050CN9333602".

(d) Inspection lot identification.

Note: Once the part has been marked, the part is classifed confidential and shall be handled as such.

3.8.1 Other marks. The vendor may add additional markings, for his own use, on the bottom surface of the package provided that these markings do not interfere with the required markings.

3.8.2 Resistance to solvent. The marking shall remain legible when subjected to the resistance to solvents testing of MIL-STD-883, Method 2015.

3.9 Process control. All process controls essential for the manufacturing of microcircuits to assure a reliable end item shall be submitted to the designated agency specified in 6.3 herein prior to the start of fabrication.

3.10 First article inspection. This specification contains technical Provisions for First Article Inspection requirements for the submission of first article samples by the contractor shall be specified in the contract.

3.11 Workmanship. Device shall be manufactured, processed and tested in a careful and workmanlike manner in accordance with good engineering practice, with the requirements of this specification and with the production practice, workmanship instructions, inspection and test procedures prepared by the manufacturer in fulfillment of the product assurance program (See Appendix A of MIL-M-38510).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responisibility for inspection and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-M-38510 shall apply and are hereby made part of this detail specification. The supplier is responsible for the performance of all inspection requirements as specified herein, and the supplier may use his own or any other facilities suitable for the performance of the tests and inspection requirements specified herein, unless disapproved by the Government. In addition, the Government reserves the right to witness or to perform any of these tests and infections set forth in this specification where such test and inspections are deemed necessary to assure that supplies and services conform to prescribed requirements. The Government reserves the right to audit the data resulting from the manufacturer's performance of these tests and inspections.

4.2 Classification of inspections. The following types of inspection shall be conducted on this item.

a. First Article Inspection
b. Quality Conformance Inspection
c. Screening

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the provisions of 4.3.2 The first article inspection lot size after screening shall consist of fifty (50) devices, minimum.

4.3.2 Inspection to be performed. First article inspection shall be in accordance with the applicable requirements of MIL-M-38510 and as modified by this specification, excepth that the procuring agency shall be the qualifying activity. First article requirements shall consist of inspections specified in subgroups "a" through "f" listed in Table IV herein. First article items may be subjected by the qualifying activity (Government) to all of the examinations and tests specified in this specification and to any requirements of the applicable drawings.

4.3.3 Rejection. If any device fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of a device in the sample to comply with any of the stated requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

4.3.4 Requalification. The device shall be subjected to another First Article as stipulated in the contract if:

a. The contractor's manufacturing techniques or process affect the form, fit, function or internal geometry of the device by either the contractor or one of his sub-contractors supplying parts assemblies.
b. The contractor relocated his assembly facilities.
c. The contractor uses a new sub-contractor for material, parts, or assembly.
d. A change occurs in devices material, performance, or assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

TABLE IV. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-48647(AR)

PARAGRAPH	TITLE		SHEET 1 of 2		DRAWING NUMBER
	Microcircuit, Digital, Decoder Logic Array				9333602
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Sample size	50	1/		
	Subgroup a	25			
	Electrical parameters @ -37°C ± 5°C			3.5.3	Table III
	Electrical parameters @ +57°C ± 5°C			3.5.3	Table III
	Physical dimensions			3.4	MIL-STD-883, Method 2016
	Subgroup b	(25)			
	Mechanical shock			3.4	MIL-STD-883, Method 2002, B
	Vibration, variable frequency			3.4	MIL-STD-883, Method 2007, A
	Moisture resistance			3.4	MIL-STD-883, Method 1004
	Seal (fine leak)			3.4	MIL-STD-883, Method 1014, A or B
	Seal (gross leak)			3.4	MIL-STD-883, Method 1014, C
	External visual			3.4,3.8 3.11	MIL-STD-813,Method 2009
	Electrical parameters @ 25°C ± 5°C			3.5.3	Table III herein
	Subgroup c				
	Resistance to solvents	3		3.4	MIL-STD-883, Method 2015
	Bond strength (bond pulls 2/)	(25)		3.4	MIL-STD-883, Method 2011, D

NOTES:

Form 1570, 1 Feb 85 (Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may be used.)

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T19:35Z
Check the source to verify that this is the current version before use.

TABLE IV. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-M-48647(AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
	Microcircuit, Digital, Decoder Logic Array				9333602
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Subgroup d				
	Solderability (leads inspected 3/)	(25)		3.4	MIL-STD-883, Method 2003
	Subgroup e	2			
	Lead integrity			3.4	MIL-STD-883, Method 2004, B
	Seal (fine leak)			3.4	MIL-STD-883, Method 1014, A or B
	Seal (gross leak)			3.4	MIL-STD-883, Method 1014, C
	Subgroup f	25			
	Steady state life			3.4	MIL-STD-883, Method Method 1003
	Electrical parameters @ 25oC ± 5oC			3.5.3	Table III herein

NOTES:

1/ Devices which fail any test criteria in the screening sequence shall be removed from the First Article sample and replaced by additional units.

2/ The sample size is the number of bond pulls selected from a minimum number of 10 devices.

3/ The sample size is the number of leads inspected. In no case shall less than 3 devices be used to provide the number of required leads.

4/ All electrical parameters shall be recorded as go/no-go data.

5/ The same sample units shall be subjected to all the tests in a subgroup.

6/ Devices used in subgroup a shall be used in subgroup b. Devices used in subgroups a and b shall be used in subgroups c, d, and e. (Sample 50 units: subgroup a - 25 units; subgroup f - 25 units).

7/ Tests within each subgroup shall be performed in the sequence shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. Inspection lots formation shall be as defined in MIL-M-38510 for Class B devices.

4.4.2 Examination.

a. Quality conformance inspection requirements shall be in accordance with Tables I, II, III and specified herein.

b. Inspection requirements. Inspection requirements for this device shall be in accordance with the requirements of MIL-M-38510 and MIL-STD-883B, Method 5005 (Class B).

c. Conformance testing. Conformance testing is specified in Section E of Dwg. 9333602.

d. General inspection conditions. Disposition of failed lots and lot resubmission procedures shall be in accordance with applicable paragraphs of MIL-M-38510.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

4.5 Test methods, circuits and procedures.

4.5.1 Alternate methods, circuits and procedures. Unless otherwise stated in the specific test method, the methods and circuits shown are given as the basic measurement method. For alternate methods, circuits and procedures the manufacturer shall demonstrate to the procuring activity that alternates which he may desire and propose to use are equivalent and give results within the desired accuracy of measurement (See 6.3).

4.5.2 Test conditions. Unless otherwise specified all examinations and tests shall be made under the following conditions:

Temperature - 25° ± 3°C
Humidity - 10 to 70 percent RH
Pressure - 29 ± 3 inches of Hg

5. PACKAGING

5.1 Packaging. Requirements for packaging shall be in accordance with MIL-M-38510, including provisions for electrostatic protection and MIL-M-55565. Shipping of classified materials shall conform to the requirements established by the Department of Defense for confidential materials using the signature security service.

6. NOTES

6.1 Intended use. This microcircuit is part of the MOPMS Mine Electronics Assembly.

6.2 Ordering data. Procurement documents shall specifiy the following:

a. Title, number and date of this specification.
b. Provisions for submission of first article samples.
c. Provisions of MIL-A-48078.

6.3 Submission of inspection equipment designs for approval. (See MIL-A-48078) Submit equipment designs as required to Commander, US Army Armament Research, Development and Engineering Center, AMSMC-QAT-I(D), Dover, New Jersey 07801-5001.

6.4 Distribution of ammunition data cards. Distribution of data cards shall include the following: Commander, US Army Armament Research, Development and Engineering Center, AMSMC-QAT-M(D), Dover, New Jersey 07801-5001.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:35Z
Check the source to verify that this is the current version before use.

6.5 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research, Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as, Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, Picatinny Arsenal or ARRADCOM drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.6 Subject term (key word) listing.

Conformance Testing
Electrical Performance Characteristics
Environmental Testing
First Article Testing
Mechanical Testing
Microcircuit, Digital, Decoder, Logic Array
Quality Assurance
Quality Conformance Inspection
Screening

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1345-A345)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
U S ARMY ARMAMENT MUNITIONS & CHEMICAL COMMAND
ATTN: AMSMC-QA
DOVER, NJ 07801 5001

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:35Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-48647	MICROCIRCUIT, DIGITAL, DECODER, LOGIC ARRAY

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.