[INCH-POUND]
A-A-55504
November 7, 1994

COMMERCIAL ITEM DESCRIPTION

FUSEHOLDER, EXTRACTOR POST, WHICH ACCOMMODATES 3AG (6.35 MILLIMETERS (MM) X 31.75 MM (.25 INCH (IN) X 1.25 IN)) OR 5 MM X 20 MM (.196 IN x .787 IN) FUSE CARTRIDGES

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for extractor post fuseholders which accommodate 3AG or 5 mm x 20 mm fuse cartridges. Requirements for specific fuseholders are covered in the individual CID sheets. Fuseholders by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown in the following example (see 7.1).

AA55504	/01	-002	D
Abbreviated CID number	Applicable CID sheet (two digits)	Dash number (see applicable CID sheet)	Rear terminal code (see table I and applicable CID sheet)

TABLE I. Terminals.

Rear terminal code	Rear terminal configuration
A	Quick connect 4.74 mm (.186 inch) wide in-line (see figure 1).
B	Quick connect 4.74 mm (.186 inch) wide right angle (see figure 1).
C	Quick connect 6.35 mm (.25 inch) wide in-line (see figure 1).
D	Quick connect 6.35 mm (.25 inch) wide right angle (see figure 1).

3. SALIENT CHARACTERISTICS

3.1 Design and construction. Fuseholders supplied to this CID shall be as specified on the applicable CID sheet.

3.2 Ampere rating. The ampere rating shall be 20 amperes maximum.

3.3 Voltage rating. The voltage rating shall be 250 V ac maximum.


Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-6189, or facsimile (FAX) (513) 296-8868.

AMSC N/A
FSC 5920


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.


REAR TERMINAL (IN-LINE)
CONFIGURATION A



REAR TERMINAL (RIGHT ANGLE)
CONFIGURATION B

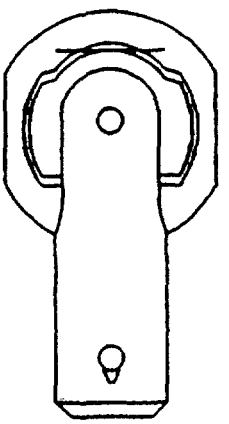

REAR TERMINAL (IN-LINE)
CONFIGURATION C



REAR TERMINAL (RIGHT ANGLE)
CONFIGURATION D

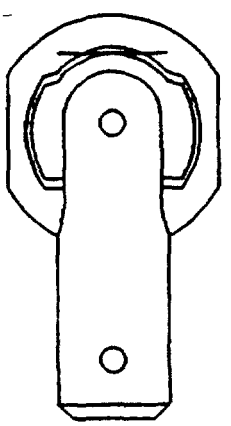


Figure 1. Rear terminal configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

3.4 Terminal plating. Terminals shall be tin plated brass. Use of pure tin plating is prohibited as a final finish and as an undercoat. Use of tin-lead (Sn-Pb) finishes are acceptable provided that the minimum lead content is 3 percent.

3.5 Rear terminal configuration (RTC). The RTC shall be in accordance with NEMA DC 2 and as specified in table I and on the applicable CID sheet. The RTC codes A and B may be supplied with a tear-drop shaped hole.

3.6 Insulation resistance. The insulation resistance shall be 10,000 megohms minimum at 500 V dc in accordance with IEC 257.

3.7 Contact resistance. The contact resistance shall be less than 0.005 ohm average at currents up to 1 ampere in accordance with IEC 257.

3.8 Dielectric strength. The dielectric strength shall be 4000 volts minimum.

3.9 Ambient temperature. The ambient temperature shall be -40°C to +85°C.

3.10 Vibration. Fuseholders shall withstand 10-500 hertz, .03 inch constant amplitude or 10 G's constant acceleration.

3.11 Fuseholder body material. The fuseholder body shall be thermoplastic with a UL 94HB flammability rating as a minimum.

3.12 Knob material. The knob material shall be either grey thermoplastic for the screwdriver slotted knob or black thermoplastic for the finger grip knob with a UL 94HB flammability rating as a minimum.

3.13 Spacer material. The spacer shall be either neoprene or polycarbonate with a UL 94HB flammability rating as a minimum.

3.14 Mounting hex nut material. The mounting hex nut shall be of either black polycarbonate or thermoplastic with a UL 94HB flammability rating as a minimum.

3.15 Mounting. Threaded styles shall withstand 15 pounds per inch mounting torque. Maximum panel thickness 7.90 mm (.311 inch).

3.16 Mounting holes. Mounting holes shall be as specified on the applicable CID sheet.

3.17 Marking. Fuseholders supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

4. REGULATORY REQUIREMENTS. This section is not applicable to this CID.

5. QUALITY ASSURANCE PROVISIONS

5.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection, examination, and test requirements specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections, examinations, or tests set forth in this description where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

5.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

5.3 Certificate of compliance. Each contractor desiring to be listed as a suggested source of supply shall submit a DESC certificate of compliance to DESC-ELDM. This certificate shall state that the contractor's product meets all the requirements of this CID. In addition, a certificate of compliance shall accompany all fuseholders supplied to this CID.

5.4 Market acceptability. The following market acceptability criteria are necessary to document the quality of the product to be provided under this CID:

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years.

b. The company must have sold 1000 units meeting this CID in the commercial marketplace over the past 2 years.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or purchase order.

7. NOTES

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See 2 for PIN format example.

7.2 Terminal plating finishes. Pure tin plating is prohibited (see terminal plating) since it may result in tin whisker growth. Tin whisker growth could adversely affect the operation of electronic equipment systems. For additional information on this matter, refer to ASTM B545.

7.3 Source of documents.

Other Publications

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B545 - Electrodeposited Coatings of Tin, Standard Specification For.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1180.)

INTERNATIONAL ELECTROTECHNICAL COMMISSION (IEC)

IEC 257 - Fuse-holders for Miniature Cartridge Fuse-links, Standard For.

(Application for copies should be addressed to the International Electrotechnical Commission, 1 Rue De Varembe', Geneve, Switzerland.)

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION

NEMA DC 2 - Residential Controls Quick Connect Terminals, Standard for.

(Application for copies should be addressed to the National Electrical Manufacturers Association, 2101 L Street, N.W., Washington, DC 20037-1526.)

UNDERWRITERS LABORATORIES, INCORPORATED (UL)

UL 94 - Safety Tests for Flammability of Plastic Materials for Parts in Devices and Appliances, Standard For.

(Application for copies should be addressed to the Underwriters Laboratories, Incorporated, 333 Pfingsten Road, Northbrook, IL 60062-2096.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

7.4 Government users. To acquire information on obtaining these fuseholders from the Government inventory system, contact Defense Electronics Supply Center, ATTN: DESC-EOM, 1507 Wilmington Pike, Dayton, OH 45444-5519, or telephone (513) 296-5106.

7.5 Ordering data. The contract or purchase order should specify the following:

a. CID document number, revision, and CID PIN.

b. Quality assurance provisions.

c. If a bid sample is required.

d. Packaging requirements.

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-ES

Project 5920-D226

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.