[INCH-POUND]
A-A-55517/1E
24 June 2020
SUPERSEDING
A-A-55517/1D
21 December 2015

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

RESISTOR, FIXED, CARBON FILM, 1/8 WATT

* The General Services Administration has authorized the use of this Commercial Item Description for all agencies.

* The complete requirements for procuring a 1/8 watt, fixed, carbon film resistor described herein shall consist of this document and the issue in effect of A-A-55517.

* CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system, which is included in the PIN as shown in the following example (see NOTES).

AA55517	01	***	*
CID number	Applicable CID sheet (two digits)	Resistance	Tolerance

SALIENT CHARACTERISTICS

Interface and physical dimensions. Resistors supplied to this CID specification sheet shall be as specified herein (see figure 1).

Power rating. The power rating for the resistor shall be 1/8 watt.

Voltage rating. The voltage rating shall be 200 V.

Overload voltage. The overload voltage shall be 400 V.

Resistance. The resistance range shall be 1.0 ohm to 22 megohms.

Resistance tolerance. The standard resistance tolerance available is J (±5 percent). Resistance tolerances G (±2 percent) and K (±10 percent) are also available.


Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data that may improve this document should be sent to: DLA Land and Maritime, ATTN: VAT, Post Office Box 3990, Columbus, OH 43218-3990, or emailed to resistor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 5905

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.

Operating ambient temperature. The operating ambient temperature range shall be -55°C to +155°C.

Marking. Resistors supplied to this CID specification sheet shall be marked as specified in A-A-55517.

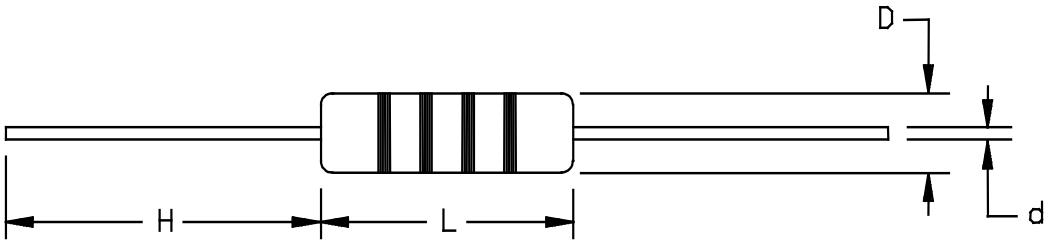

Dimension			
L	D	H	d
0.145 ±.032 (3.68 ±.81)	0.067 ±.024 (1.7 ±.61)	0.788 min. (20.02 min.)	0.020 ±.004 (0.51 ±.10)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given in parenthesis for general information only.
3. The picturization of the style above is given as a representative of the envelope item. Light deviations from the outline shown, which are contained within the envelope and do not alter the functional aspects of the device, are acceptable.

FIGURE 1. Dimensions and configuration.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See CLASSIFICATION for PIN format example.

Source of documents.

COMMERCIAL ITEM DESCRIPTION

A-A-55517 - Resistor, Fixed, Carbon Film, General Requirements for

* (Copies of these documents are available online at https://quicksearch.dla.mil).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown).

MFR's CAGE	MFR's name and address
08KU4	RFE International, Inc. 1938 Blair Avenue Santa Ana, CA 92705-5707 Phone: (949) 833-1988 Fax: (949) 833-1788 Email: sales@rfeinc.com Website: www.rfeinc.com
56637	RCD Components, Inc. 520 East Industrial Park Drive Manchester, NH 03109-5316 Phone: (603) 669-0054 Fax: (603) 669-5455 Email: sales@rcdcomponents.com Website: www.rcdcomponents.com

Part number (P/N) supersession data. This CID specification sheet PINs supersedes the following manufacturers P/N as shown in table I. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE I. P/N supersession data.

CID coded number	MFR's CAGE	MFR's P/N 1/
AA5551701****	08KU4	CR12
	56637	CF12Q

1/ The manufacturers P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see paragraph 3.7 of A-A-55517.

National Stock Number. This section is not applicable to this CID specification sheet.

* Changes from previous issue. The margins of this CID specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
NAVY - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FAS

Preparing activity:
DLA - CC

Project 5905-2020-011

NOTE: The activities listed above were interested in this document as the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.