MILITARY SPECIFICATION

BADGE, BREAST, IDENTIFICATION (U.S. COAST GUARD)

This specification is approved for use by the United States Coast Guard, Department of Transportation and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a woven breast badge of one type and size.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

PPP-B-566	- Boxes, Folding, Paperboard
PPP-B-636	- Boxes, Shipping Fiberboard
PPP-B-676	- Boxes, Setup

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402-0001.)

DRAWINGS

NAVY CLOTHING AND TEXTILE RESEARCH FACILITY

Drawing No. 16-1-864 - Badge, Breast, Identification For U.S. Coast Guard

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of documents which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies shall be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:13Z
Check the source to verify that this is the current version before use.

Department of Defense Standard Shades for Heraldic Yarns

(Applications for copies shall be addressed to the Color Association of the United States, 343 Lexington Ave., New York, N.Y. 10016).

AMERICAN SOCIETY FOR TESTING AND MATERIALS

D1059 - Yarn Number Based on Short-Length Specimens

(Applications for copies shall be addressed to the American Society For Testing and Materials, 1916 Race St., Philadelphia, PA 19103-1187.)

TECHNICAL MANUAL OF THE AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

Method No. 8-1985 Colorfastness to Crocking: AATCC Crockmeter Method

(Applications for copies shall be addressed to AATCC National Headquarters, P. O. Box 12215, Research Triangle Park, NC 27709-9989.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Yarn. The yarn shall be multifilament semidull polyester yarn (polyethylene glycol terephthalate). The yarn number for the warp shall be 90 denier (see 4.4.1) and the color shall be black. The yarn for the filling shall be of a denier suitable for the purpose intended and as per guide sample (see 3.1). The colors shall be as specified in 3.3.1.2.

3.3.1.1 Heat setting. All yarns, both warp and filling, shall be heat-set. The denier of the yarn shall be determined as it is received from the yarn producer and prior to adding twist, heat setting and finishing.

3.3.1.2 Color. The yarn shall be dyed to match the colors specified in Table I in accordance with the Department of Defense Standard Shades for Threads. The yarns may be solution dyed or dyed with a dispersed dye. When ribbons contain two or more colors of yarn, each color may be all solution dyed or all yarn dyed, but not mixed in the same color. The use of dyes and

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

compounds containing elementary sulfuric acid is prohibited. The dyestuff shall be chosen and applied so that the dyed and finished yarn shall either be free of labile sulfur or contain no more labile sulfur than shown by the standard sample when tested as specified in 4.4.1.

Table I - Color of Yarn

Background and filling		Letters	
Color	Cable No.	Color	Cable No.
Black Han	67138	White	67101
Ultramarine Blue HS	67118		

3.3.1.3 Weight. The weight of the finished badge shall be 7.6 (± .5) oz per yd^2 when tested as specified in 4.5.

3.3.2 Colorfastness. The finished badge shall show colorfastness to light (after 40 SFH), laundering (after 3 cycles), crocking and perspiration equal to or better than the standard sample when tested as specified in 4.5. As a limit of acceptability or when no standard sample is available, the finished badge shall show a minimum of "good" fastness to light (after 40 SFH) laundering (after 3 cycles), crocking and perspiration and shall show a dry crocking rating not lower than 5 when tested as specified in 4.5.

3.3.2.1 Matching. The finished badge shall match the standard sample when viewed under filtered tungsten lamps which approximate artificial daylight, having a correlated color temperature of 7500K (± 500K) with illumination of 100 (± 20) foot candles and shall be a good match to the standard sample under incadescent lamplight at 2300K (± 200K).

3.4 Construction. The insignia shall be fabricated in accordance with the details and dimensions shown on Figure 1.

3.4.1 Physical requirements. Each badge shall conform to the physical requirements listed in Table II.

Table II Physical requirements

	Ends/picks
Black warp	280/repeat
Blue filling	72/inch
White filling	72/inch

3.4.2 Weave. The badge shall be woven as a 1 by 3 right hand twill per repeat. Woven selvages shall be permitted in the lengthwise dimension and shall be 3/64 (± 1/16) inch wide on each end.

3.4.2.1 Cutting mark. A variation in weave, to serve as a cutting mark shall be permitted provided it is limited to an area no larger than 3/8 inch in the filling direction and 1/8 inch in the warp direction, centered between the end of one pattern and the beginning of the next pattern.

3.5 Design. The design shall consist of Roman lettering on a blue background conforming to U.S. Coast Guard shade Blue 3362 and Navy Clothing

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

and Textile Research Facility Drawing No. 16-1-864 and guide sample (see 3.1).

3.5.1 Figure. The figure is for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.6 Finish. The reverse side of the badge shall be coated with a clear fabric finish which shall give the badge a firm and stiff finish, shall not affect the colors of the yarn and not react adversely to storage, laundering, or ironing. The finish shall conform to the guide sample and shall be tested for stiffness as specified in 4.5. The minimum stiffness requirement shall be 23.4×10^{-4} $(-0, +10 \times 10^{-4})$ inch pounds.

3.6.1 Cutting. The badges shall be completely cut at right angles to the specified size in the lengthwise and widthwise direction with a blade hot enough to obtain a fused finished edge. When a woven selvage is used the cutting shall be at right angles. The edge shall be sufficiently sealed to insure no breaks or raveled edges in the fused area.

3.7 Workmanship. The finished badges shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. The first article, submitted in accordance with 3.2, shall be inspected as specified in 4.4.2 for compliance with construction, workmanship and end item examination.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable procurement documents. In addition, testing shall be performed on components and materials listed in Table III. The sample unit for testing shall be one completly fabricated badge. The lot shall be unacceptable if one or more sample units fails to meet any requirement specified. The sample size shall be as follows:

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more units fail to meet any requirement specified.

Table III Component testing

Characteristic	Requirement paragraph	Test method	No. of determinations per sample unit	Results reported as
Yarn identification	3.3.1	1/	-	-
Yarn denier	3.3.1	ASTM D-1059	-	-
Color	3.3.1.1	Visual	1	Pass or fail
Labile sulfur	3.3.1.1	2020	1	Pass or fail

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirement.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 through 4.4.2.3.

4.4.2.1 Visual examination. The badges shall be examined for defects classified in accordance with the list below.

Examine	Defect
I. Design	Any detail not as specified on Figure 1 as applicable
II. Material	Hole, float, broken end, slub, streak or running defect in material
	Broken, cut or torn selvage edge
III. Workmanship	Cut, tear or abrasion
	Misshaped or distorted design

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:13Z
Check the source to verify that this is the current version before use.

Examine	Defect
	Lettering improperly centered between selvage and ends
	Background showing through lettering
	Permanent crease
	Badge askew
	Weave variation (cutting mark) larger than 3/8 inch in filling direction and 1/8 inch in warp direction and not centered between beginning and ending of patterns
	Spot, stain or foreign matter on face
IV. Finish	Not correct color or shade as specified
	Back not finished
V. Heat sealing	Excessive unsealed fibers on ends (except at cutting marks)
	Face yarn discolored (due to heat sealing)
VI. Cutting	Breaks or raveled edges in the fused area

4.4.2.2 Dimensional examination. The badges shall be examined for defects in dimensions in accordance with Table IV. The lot size shall be expressed in units of one badge. The sample unit shall be one badge.

Table IV Classification of dimensional defects

Examine	Defect
Height of letters	More than 21/64 inch or less than 5/16 inch
Width of letters	Variation of more than 1/64 inch from requirement
Overall length	Variation greater than authorized tolerance
Overall width	Variation greater than authorized tolerance

4.4.2.3 Inspection levels and acceptable quality levels (AQL's). The inspection levels and acceptable quality levels, expressed in defects per hundred units for visual and dimensional examination, shall be as follows:

	Inspection level	AQL
For defects applicable to 4.4.2.1	II	4.0
For defects applicable to 4.4.2.2	S-3	6.5

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units, in accordance with MIL-STD-105.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

	incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

4.5 Testing of the end item. The methods of testing specified in FED-STD-191 whenever applicable and as listed in Table V shall be followed. When the data in the "number of determinations per sample unit" and "results reported as" columns are not specified in Table V, they shall be as required by the referenced test method. The lot size shall be expressed in units of one badge. The sample unit shall be 8 badges for color, physicals, colorfastness and weave tests. The lot shall be unacceptable if one or more units fail to meet the requirements referenced in Table V. The sample size shall be as follows:

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Table V Testing of the end item

Characteristic	Requirement paragraph	Test method	No. of determinations per sample unit	Results reported as
Weight	3.3.1.3	5041	1	Pass or fail
Colorfastness to:				
Crocking	3.3.2	AATCC-TM #8	1	Pass or fail
Light	3.3.2	5660 1/	-	-
Laundering	3.3.2	5605	-	-
Perspiration	3.3.2	5680	-	-
Reaction of finish to:				
Laundering	3.6	5605	-	-
Weave	3.4.2	Visual	1	Pass or fail
Texture ends (total)				
Black warp	3.4.1	5050	1	Pass or fail
Blue filling	3.4.1	5050	1	Pass or fail
White filling	3.4.1	5050	1	Pass or fail
Stiffness	3.6	5206	1	Pass or fail

1/ The calibration of the fadeometer and the definition of AATCC Fading Units shall be according to AATCC Test Method 16-1982. Using the formula below, 16 to 22 AFU's are acceptable as 20 SFH's.

Source: https://assist.dla.mil -- Downloaded: 202640-20T03:13Z
Check the source to verify that this is the currentversion before use.

AATCC Fading Units - $\frac{(\Delta E^*)\ (20)}{1.7}$

Where (ΔE^*) is the color difference in CIELAB* units of color difference.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified.

5.1.1 Level A. Five hundred badges shall be packaged in a set-up paperboard box conforming to type I, variety 1, class A, style 3 or 4 of PPP-B-676 or a folding paperbox conforming to variety 1, style III, type G, class 1 of PPP-B-566. Closure shall be in accordance with the appendix of the applicable box specification.

5.1.2 Level C. Badges shall be packaged to afford adequate protection against damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Twenty thousand badges (40 intermediate boxes), packaged as specified in 5.1, shall be packed in a fiberboard shipping container (regular slotted carton) conforming to type CF, class weather-resistant, variety DW, grade V15c, style RSC of PPP-P-636. Closure and reinforcement requirements shall be as specified in the appendix of the box specification. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.2 Level B. Twenty thousand badges (40 intermediate boxes), packaged as specified in 5.1, shall be packed in a fiberboard shipping container (regular slotted carton) conforming to type CF, class domestic, variety DW, grade 275, style RSC of PPP-P-636. Closure and reinforcement requirements shall be as specified in the appendix of the box specification. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The badges are intended for wear on the utility shirt by male/female enlisted personnel of the U.S. Coast Guard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
c. When first article inspection is required, (see 3.2) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

6.4 Subject term (key word) listing.
Badge
Blue
Enlisted
Identification
Male/Female
Utility

Custodian:
Navy - NU

Preparing Activity:
Navy - NU

User Activity:
Navy - CG

Review Activity:
DLA - CT

Project No. 8455-N336

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

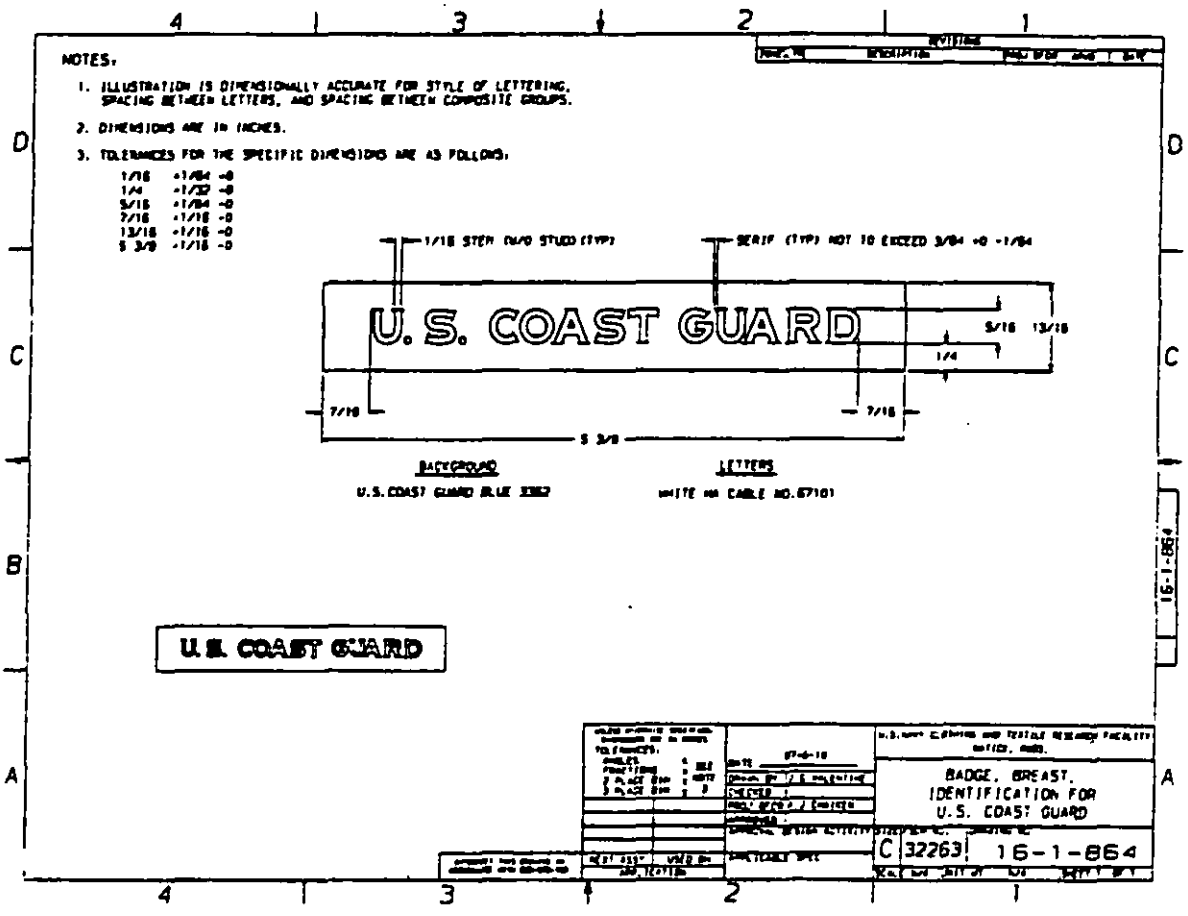


Figure 1 - Badge, Breast, Identification (U.S. Coast Guard)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge

Figure 1 - Badge, breast, identification (U.S. Coast Guard)

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-B-24947(CG)	BADGE, BREAST, IDENTIFICATION (U.S. COAST GUARD)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil — Downloaded: 2026-10-20 20:30:40 Z
Check the source to verify that this is the current version before use.