MIL-C-24924
8 July 1986

MILITARY SPECIFICATION

CAP, MAN'S UTILITY

This specification is approved for use by the United States Coast Guard, Department of Transportation, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a utility cap fabricated of a polyester and cotton poplin blend fabric treated with a durable water repellent finish.

1.2 Classification. The cap shall be of one type only in the following sizes.

1.2.1 Sizes.

Small - Medium Large - Extra Large

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
NN-P-71	- Pallet, Material Handling, Wood Stringer Construction, 2 Way and 4 Way Entry
UU-P-31	- Paper; General Specifications and Methods of Testing
DDD-L-20	- Label; for Clothing, Equipage and Tentage (General Use)
PPP-B-636	- Boxes, Shipping, Fiberboard
PPP-T-45	- Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard, (Modular Sizes)
MIL-C-29363	- Cloth, Poplin, Polyester and Cotton (Water Repellent)
MIL-T-43548	- Thread, Polyester, Cotton-Covered and Rayon-Covered
MIL-T-43624	- Thread, Polyester, Spun
MIL-P-55010	- Plastic, Sheet, Polyethylene Terephthalate

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

DEPARTMENT OF DEFENSE STANDARD COLOR CARD
OF OFFICIAL STANDARDIZED SHADES FOR SEWING THREAD

(Applications for copies may be obtained from the Color Association of the United States, Inc., 343 Lexington Ave., New York, NY 10016.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material shall be water repellent treated cotton and polyester poplin cloth conforming to MIL-C-29363, Shade Blue 3376. The standard sample is identified under piece number 85017.

3.3.2 Visorboard. The materials for the visorboard shall be composed of high alpha cellulose wood pulp, wet web impregnated with compounded neoprene. The material shall conform to the following requirements when tested as specified in Table IV (see 6.4).

Thickness, inch	0.075 ± 0.003
Weight, lbs/yd^2 (min)	2.21 ± .11
Tearing strength, gram/centimeters (min.)	
- Machine direction	1412
- Cross direction	1642
Tensile strength, lbs/in (min.)	
- Machine direction	135
- Cross direction	86
Stretch, percent (max.)	
- Machine direction	11.0
- Cross direction	22.0
Neoprene Content (percent)	
- Maximum	35.0
- Minimum	15.0

3.3.3 Front crown stiffener. The material for the front crown stiffener shall be 100 percent cotton warp and 100 percent nylon monofilament filling. The weave shall be a plain weave (1/1). The cloth may be finished with a stiffening agent provided that the compound used is non-toxic. The finished cloth shall conform to the following requirements when tested as specified in 4.4.1.1.

Weight oz/sq yd (min)	7.0
Yarns per inch (min)	
Warp	40
Filling	25
Thickness (inch)	0.025 ± 0.001
Stiffness (lb)	
Warp	0.010 ± 0.003
Filling	0.080 ± 0.003

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

3.3.4 Sweatband. The sweatband assembly is multilayer consisting of a polyester/cotton lining, a .093 density 3/32 inch foam, a 3.0 oz/yd^2 non-woven interlining and 4 gauge plastic outer layer. The sweatband shall finish 1-3/8 (+ 1/16) inch wide and shall be in accordance with John Solomon, Inc., style # 300-3 or equal (see 6.5 and 6.6).

3.3.5 Size strip. The size strip shall be made from polyethylene terephthalate plastic sheet conforming to MIL-P-55010, except the thickness shall be 0.020 ± 0.002 inch, the color shall be natural (clear or opaque), and the transparency and optical properties shall not apply. The strip shall measure from 1/4 to 5/16 inch wide and sufficient length to meet the measurement requirements of Table II (see operation 7). Testing shall be as specified in 4.4.1.1 (see 6.4).

3.3.6 Tape, bias-cut. The tape for covering the seams and back opening shall be bias-cut 1-1/8 (± 1/16) inches wide of basic material specified in 3.3.1.

3.3.7 Strap, adjustable sizing. The material for the adjustable sizing straps shall be the same material specified in 3.3.5 except the thickness shall be 0.055 (± 0.005) inch thick, and the color shall be blue to approximate the basic fabric. The male portion of the strap shall have 6 or 7 prongs with the top flanged out for good snapping and closing. The female strap shall have the same number of holes as prongs on the male strap. The size of the straps shall be 3/4 (± 1/8) inch wide and 3-1/2 (± 1/8) inches long with one end of each strap rounded. Testing shall be as specified in 4.4.1.1.

3.3.8 Thread. A covered polyester thread conforming to MIL-T-43548 shall be used. When covered thread is used Ticket No. 50, 2 or 3 ply shall be used for seaming and stitching, stitching of eyelet, and reinforcement of the visor. Ticket No. 70, 20 or 3 ply shall be used for stitching the bias tape. The color of the thread shall approximate the shade Blue AB, CA 66044.

3.3.8.1 Alternate thread. As an alternate to 3.3.8 the thread for seaming and stitching shall be spun polyester thread conforming to Class 1, Ticket No. 50, 3 ply of MIL-T-43624. The thread for stitching the eyelets shall be cotton, type IC2, Ticket No. A, 3 ply conforming to V-T-276. The thread for stitching the bias tape shall be cotton type IC2, Ticket No. 00, 3 ply of V-T-276. The thread for reinforcement of the visor shall be cotton type IA3, Ticket No. 50, 3 ply of V-T-276. The color of the thread shall approximate the shade Blue AB, CA 66044.

3.3.8.2 Colorfastness. The dyed thread shall show colorfastness to light, laundering and perspiration equal to or better than the standard sample when tested as specified in V-T-276, MIL-T-43548, or MIL-T-43624. When no standard sample is available the dyed thread shall show a minimum of "good" fastness to light, laundering and perspiration when tested as specified in V-T-276, MIL-T-43548 or MIL-T-43624.

3.3.9 Labels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

3.3.9.1 Combination label. Each cap shall have a combination-identification size label conforming to Type VI, Class 4 of DDD-L-20 and shall not finish wider than the sweatband. The fastness to laundering shall apply.

Cap, Man's, Utility
Fiber content: 65% polyester 35% cotton
Contract No:
Stock No:
Size:

3.3.9.2 Instruction label. Each cap shall have a separate instruction label conforming to Type VI, Class 3 of DDD-L-20. Fastness to laundering shall apply.

Hand wash in lukewarm water
Mild soap
Reshape and air dry

3.4 Design. The cap shall be a six gore construction, open back, mushroom shaped, made of polyester/cotton material. The front shall be stiffened with a heavy duty material, and shall have a three piece visor with 8 rows of stitching. All gore seams shall be covered by bias-cut tape. There shall be a heavy duty sewn eyelet in the back four gores, abound back opening, an adjustable sizing strap, multi-layer sweat band assembly, and a sizing strip. Size and instruction labels shall be sewn into the back of the sweatband to permit ready identification.

3.4.1 Figures. The figures are furnished for information only. If there are any inconsistencies between the specification and the figures, the specification shall govern.

3.5 Patterns and blocks. Standard patterns and blocks will be furnished by the Government to the contractor for use in cutting working patterns and reproducing wood or metal blocks. The contractor's working patterns and blocks shall be identical to the Government standards. Neither the Government patterns nor the working patterns shall be altered in any way. The standard blocks shall be returned to the Government in good condition.

3.5.1 List of pattern parts. The component parts of the cap shall be cut from the materials as specified in accordance with the number of parts required for the manufacturing process as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

Material	Pattern Parts	Cut Parts
Cloth, poplin, cotton and polyester	Front Crown	2
	Side Crown	2
	Back crown	2
	Visor top ply	1
	Visor bottom ply	1
Alpha cellose wood pulp	Visor board	1
Synthetic Haircloth	Front crown panel (stiffener)	2

NOTE: Patterns are not furnished for sizing strip, adjustable sizing strap, sweatband, bias tape, and binding for back opening.

3.6 Construction.

3.6.1 Stitches, seams, and stitching. Stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. Where stitch type 401 is used, the looper, that is the underthread, shall be on the inside of the cap. Seam allowances, shall be maintained with seams properly sewn so that no raw edges, runoffs, twists, pleats or open seams will result. Unless otherwise specified, top stitching or edge stitching shall be 1/8 to 3/16 inch from folded edge.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired using 301 stitch type. When stitch type 401 is permitted as an option, it shall not be used unless the ends are caught in other seams or stitching.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be specified in table I.

3.6.4 Sewn eyelets. Eyelets shall be clean cut. The bight stitching around the eyelet shall be no less than 1/16 inch and the inside diameter of the finished eyelet shall be 1/8 to 3/16 inch. The eyelets shall have the stitches overlapping not less than 1/16 inch. The stitches per eyelet shall be determined by counting the number of needle penetrations in the outside row of eyelet stitching. The overlapping stitches at the end of the stitching shall be excluded. The thread ends shall be on the inside of the cap. There shall be minimum of 22 stitches per eyelet (see figure 2).

3.7 Manufacturing operations requirements. The cap shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished cap is identical to that produced by following the sequence as listed in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

3.7.1 Shade and size marking. The component parts of the cap shall be marked or ticketed to insure a uniform shade and size throughout the cap. Any method may be used except:

(1) Metal fastening devices
(2) Sew-on shade tickets
(3) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the cap and wherever possible, is covered by the seam allowance.

3.7.2 Blocking. The blocking of the cap as required in Table I shall be performed with a one or two piece steam heated machine or wooden block and dried.

3.7.3 Abbreviations in table of operations. The abbreviations used in table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF UTILITY CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cutting. a. Cut the caps in strict accordance with patterns furnished, which shall show size, directional (warp) lines for cutting, and notches for the proper assembly of all component parts. b. Cut all parts from the same piece of material except the visor (bottom ply), binding, and the tape, which may be cut from ends. Parts cut from ends shall approximate the shade of the main assembly. c. Cut sweatband assembly and bias tape of sufficient length to conform to the measurements in Table II. d. Cut front crown stiffener according to patterns. e. Cut the binding material for the back opening from the basic material long enough to bind the opening. f. Cut the sizing strip 1/4 to 5/16 inch wide and of sufficient length to comply with operation 7 and to meet the applicable head measurements specified in Table II. NOTE: Operations c, e, and f: These materials may be cut off a roll but must meet the requirements of Table II.				
2.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in section 4 shall be removed from production and replaced with non-defective and properly matched components.				
3.	Shade and size marking. (See 3.7.1) a. Mark or ticket components except parts cut from ends, to insure a uniform shade and size throughout the cap.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF UTILITY CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
4.	Make visor.					
	a. The visor shall be made of two plies of the basic material interlined with a visorboard.					
	b. Seam the outer edge of the top and bottom ply of the visor pieces together along the outer arc 3/16 (+ 1/16) inch from the edge. Turn to finished position.	301 or 401	SSa-1	6-12	50 50	50 50
	c. Insert visorboard so that it is up against front edge, and seam allowance is on the underside. The stitching shall be on the underside of visor.					
	d. Stitch the two plies of the basic material (visor pieces only), along the inner edge (arc). The stitching shall be not more than 1/32 inch from edge of visorboard interlining. Do not catch visorboard in the stitching.	301 or 401 or 101	SSa-1	6-12	50 50 50	50 50
	e. Stitch eight rows of stitching through all plies of material 3/16 to 1/4 inch apart following the contour of the outer arc. The outer row shall be 3/8 (+ 1/16) inch from the outer arc.	301	SSv-8	5-8	50	50
5.	Crown.					
	a. Stitch 1/8 (+ 1/16) inch from bottom edge the front section to stiffener (this operation is optional).	301 or 401	SSa-1	10-12	50	50
	b. Stitch one eyelet on each side and back piece, centered and 3 (+ 1/4) inches from top of pieces.	eyelet		min of 22 per eyelet	50	50
	c. Stitch side sections (one front, side and back) together face to face 3/16 inch from raw edge.	301 or 401	SSa-1	6-12	50	50
	d. Press seams open and flat except for sides with crown stiffener piece which are pressed towards back of cap.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF UTILITY CAP

OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
e. Join the two sections together face-to-face.	301 or 401	SSa-1	6-12	50	50
f. Press seams open and flat.					
Make and attach seam tape.					
a. Turn in both raw edges of seam tape stripping and precrease or turn in both raw edges and stitch not more than 1/8 inch from each folded edge. The tape shall finish 5/8 (± 1/16) inch wide.	101 or 301 or 401	EFa-1 each side	6-12	50 50 50	 50 50
b. Center tape over seams on crown and stitch 1/8 (± 1/16) inch from each edge.	301 or 401	Similar to SSag-3	8-10	70 70	70 70
c. As an alternate, operations a and b may be performed as one operation.					
Attach sizing strip.					
a. With the bottom edge of cap and bottom edge of sizing strip even, stitch sizing strip to inside bottom of cap 1/8 (± 1/16) inch from edge.	101 or 301 or 401	SSab-1	6-12	50 50 50	 50 50
Attach visor to crown.					
a. Prior to sewing visor to crown, place a cut or notch 1/4 inch long in the center of material seam allowance on the visor.					
b. Position visor on outside crown assembly with the cut or notch in visor centered with the stitching on outside center seam. Stitch the visor to crown assembly 3/8 (± 1/16) inch from edge of front crown. There shall be no puckering between front crown panel and visor on the completed assembly.	101 or 301	SSa-1	6-12	50 50	 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF UTILITY CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
9.	Bind open back.					
	a. Bind open back of cap. The binding shall finish 1/4 inch wide.	301 or 401	BSc-1	6-12	50	50
10.	Attach sweatband.					
	a. Position the inner bottom edge of sweatband on outer bottom edge of cap 1/4 to 3/8 inch in from the edge. Stitch 3/32 (+ 1/32) inch from edge joining sweatband to bottom crown assembly. The sweatband shall be fitted to the cap without stretching or twisting. The stitching shall be caught in the sizing strip.	301 or 401	LSa-1	6-12	50 50	50 50
	b. Turn to finished position and top stitch bottom of cap around visor portion.	301	EFa-1	6-12	50	50
11.	Attach adjustable sizing strap.					
	a. Turn in ends of sweatband even with the bound edge of the open back of cap.					
	b. Stitch adjustable strap between sweatband and crown. Backstitch the entire width of adjustable strap to secure seam. The closed strap shall finish 2-7/8 (+ 1/8) inches long with the male prongs facing outward. The male prongs should be attached to left of cap as worn.	301 or 401 or 101	Similar or to LSa-1	6-12	50	50
12.	Attach label.					
	a. Position labels on left portion of sweatband. Stitch label 3/32 (+ 1/32) inch from edge on all four sides. Instruction and combination label shall be placed next to each other.	301	LSbj-1	6-12	50	50
13.	Clean and block cap.					
	a. Trim thread ends and remove loose thread.					
	b. Remove shade marking.					
	c. Clean white residue on outside of cap made when stitching of sizing strip.					
	d. Steam and dry cap on the appropriate size block.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Sizes and measurements of the finished caps shall be as shown in Table II. All measurements and tolerances are expressed in inches.

Table II - Sizes and finished measurements

Cap size	Front Crown Height (A)	Head Circumference (B)
Small - Medium	6-3/4	22
Large - X-Large	6-3/4	23-1/2
Tolerance	± 1/4	± 1/4

NOTE: A and B refer to figure 1.

A. Front crown. The measurement shall be taken from center base of visor along front seam to top of cap.

B. Head circumference. The measurement shall be taken around the inside bottom edge of sweatband with adjustable sizing strap male prongs engaged with all the holes in the female part.

3.9 Workmanship. The finished cap shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality level.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents.

4.4.1.1 Testing of components. In addition to the quality assurance provisions of the referenced specifications, components listed in Table IV shall be tested for the characteristics shown therein. The methods of testing specified in FED-STD-191 and UU-P-31, wherever applicable, and as specified herein shall be followed. All test reports shall contain the individual values utilized in expressing the final result. The sample size shall be in accordance with Table III and the lot shall be unacceptable if one or more units fail to meet any requirements specified. The sample unit for the visor interlining (visorboard) and front crown stiffener shall be 2 continuous yards. The lot size shall be expressed in units of yards.

Table III - Sample size

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

Table IV - Testing of components

Component	Characteristic	Requirement paragraph	Test method
Visorboard	Thickness	3.3.2	5030
	Weight	3.3.2	5041
	Tensile strength	3.3.2	171 of UU-P-31
	Tearing strength	3.3.2	170 of UU-P-31
	Stretch	3.3.2	171 of UU-P-31
	Neoprene content	3.3.2	1/
Front crown stiffener	Weight	3.3.3	5041
	Material identification	3.3.3	1/
	Thickness	3.3.3	5030
	Yarn per inch	3.3.3	5050
	Stiffness	3.3.3	5202
	Weave	3.3.3	Visual
Sweatband	Material identification and construction	3.3.4	1/
Size strip and adjustable sizing strap	Material identification	3.3.5	1/
	Thickness	3.3.5	5030
	Dimensional requirements	3.3.5	Visual

1/ A certificate of compliance is acceptable for this requirement.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 through 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The sample unit shall be one finished cap. The lot size shall be expressed in units of caps.

4.4.2.1 Visual examination. The caps shall be examined for defects in color, design, material construction, workmanship and marking and the defects classified in accordance with the list below:

Defect	Classification Major	Minor
MATERIAL DEFECTS AND WORKMANSHIP DAMAGES		
a. Any hole, needle chew, cut or tear	X	
b. Weakening defect such as slub, smash, float	X	
c. Any outside part shaded		X
d. Any visible mend or burn	X	
CLEANNESS		
a. Any spot or stain on outside		X
b. More than 3 thread ends not trimmed to 1/4 inch or less on outside	X	
c. More than 5 thread ends not trimmed to 1/2 inch or less on inside		X
d. Two or more shade or size markings not removed		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
e. Shade marking exposed or readily visible on outside of cap		X
COMPONENTS AND ASSEMBLY		
Any component part or operation omitted or not as specified (unless otherwise classified herein)	X	
CUTTING		
Any part not cut in accordance with directional lines indicated on patterns or in accordance with specification requirements	X	
BLOCKING AND PRESSING		
a. Blocking omitted	X	
b. Burned or scorched	X	
c. Poorly blocked		X
d. Any seam not pressed as specified		X
SEAMS AND STITCHING		
a. Accuracy of stitching		
1. Part of garment caught in any unrelated stitching operation	X	
2. Seam puckered, twisted, or pleated (unless otherwise classified herein)		X
3. End of seam or stitching when not caught in an other seam or stitching backtacked less 1/4 inch		X
4. End of a continuous line of stitching overlapped less than 1/2 inch		X
5. Thread breaks not secured or stitching back of the break less than 1/2 inch		X
b. Gauge of stitching		
1. Irregular, i.e., unevenly gauged, not uniform		X
2. Beyond range of width specified or varies more than 1/16 inch when no range is specified		X
c. Open seam or runoff		
1. Up to 1/4 inch inclusive		X
2. More than 1/4 inch	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
NOTE: One or more broken stitches or two or more continuous skipped or runoff stitches constitutes an open seam.		
d. Raw edge		
1. On outside		
- more than 1/4 inch to 3/4 inch		X
- more than 3/4 inch	X	
2. On inside		
- more than 3/4 inch		X
e. Seam and stitch type		
1. Not specified seam or stitch type		X
2. Looper thread on outside (when 401 stitch is used)		X
f. Stitch tension		
1. Loose tension resulting in loose seam	X	
2. Loose tension recognized by loosely exposed loops of lower or top thread		X
3. Tight tension (stitches break when normal strain is applied to the seam or stitching)	X	
g. Stiches per inch		
1. Less than minimum or more than maximum as specified		X
EYELETS		
a. One or more omitted or added	X	
b. Stitches not securely caught in fabric (stitches pull away from fabric)	X	
c. One or more broken or more than two continuous skipped stitches in one or more eyelets		X
d. Loose stitch tension		X
e. Number of stitches per eyelet not as specified		X
f. Inside diameter of eyelet less than 1/8 or more than 3/16 inch		X
g. Cloth cut-out in center of eyelet not removed		X
VISOR		
a. Outer edge of the two plies of visor pieces not sewn completely along outer arc	X	
b. Inner edge of visor stitching not sewn from side to side		X
c. Visorboard not held between visor plies tightly causing wrinkle on visor	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
d. Inner edge of visor stitching sewn through visor		X
e. Less than or more than eight rows of stitching on visor or stitchings not properly centered on visor or not following contour of outer arc		X
f. Eight rows of stitching less than 3/16 inch or more than 5/16 inch apart.		X
g. Cut omitted in visor causing bulk, tight tension when stitching visor to cap		X
h. Visor not centered with front seam		X
i. Stitching of visor less than 5/16 inch or more than 7/16 inch from edge		X
j. Pucker on front crown panel where visor is joined	X	
k. Stitching not on bottom underside of visor at outer arc		X
l. Visorboard not positioned on top of seam allowance	X	
CROWN		
a. Crown puckered or pleated at joining to sweatband		X
b. Any seam tape less than 9/16 inch or more than 11/16 wide		X
c. Distorted, pleated, or fullness on one or more panels	X	
STIFFENER		
a. Sides of stiffener not overlapped by seam tapes		X
TAPE		
a. Omitted	X	
b. Tape other than bias-cut	X	
ADJUSTABLE SIZE STRAP		
a. Omitted	X	
b. Male prongs not facing outward		X
c. Not correct length		X
d. Not securely attached		X
BACK OPENING		
a. Not bound as specified	X	
b. Not bound with basic fabric	X	
SIZING STRIP		
a. Sizing strip omitted	X	
b. Sizing strip stitching not on inside bottom edge of cap		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
SWEATBAND		
a. Edge stitching of folded sweatband material omitted	X	
b. Edge of sweatband to crown less than 1/4 inch or more than 3/8 inch		X
c. Edge of sweatband not attached to outside bottom edge of crown assembly		X
d. Sweatband stitching to cap less than 1/16 inch or more than 3/8 inch		X
e. Sweatband pleated or puckered	X	
f. Sweatband exposed below bottom edge of cap		X
g. Stitching not caught in sizing strip 1/2 inch or more		X
h. Sweatband turnup visible at back opening	X	
LABELS		
a. Combination label (identification and size) omitted, incorrect, or illegible	X	
b. Instruction label omitted, incorrect or illegible		X
c. Label not stitched on all four sides		X
d. Label not positioned as specified		X
e. Either label extending beyond the width of the sweatband		X

4.2.2.2 Dimensional examination. The cap shall be examined for defects in dimension in accordance with the following:

Any measurement deviating from nominal dimensions and tolerances specified shall be scored as a measurement defect.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units, for visual and dimensional examination shall be as follows:

	AQL's	Inspection level
For examination in 4.4.2.1:		
Major	2.5	II
Total (Major & Minor combined)	15.0	II
For examination in 4.4.2.2:		
One class	4.0	S-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation packaging. Packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each cap shall be neatly folded in half by bringing the back portion of the crown toward the front of the cap. Twenty caps of one size only shall be nested and placed with the visor flat in a fiberboard box conforming to style RSC, Type CF, Variety SW, class domestic, grade 125 of PPP-B-636. Inside dimensions of each box shall be 14-3/4 inches in length, 7-1/2 inches in width, 6-1/4 inches in depth. The nested caps shall be protected in the box with crumpled tissue paper in the voids above the visor on one end and beyond the folded crown at the opposite end. Box closure shall be secured with a minimum 2 inches width gummed paper tape conforming to type III, grade B of PPP-T-45.

5.1.2 Level C. The caps shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Sixty caps of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15C, size 2 of MIL-B-17757. Level A packages shall be packed flat, three in length within the shipping container. Toward the end of the contract or when there are less than the required amount of the same size per container, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Sixty caps of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, variety DW, grade 200, size 2 of MIL-B-17757. Level A packages shall be packed flat three in length within the shipping container. Toward the end of the contract or when there are less than the required amount of the same size per container, mixed sizes may be packed within the same shipping container.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 4 by 5 inches with the words "Mixed Sizes" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV, V or VIII, Class 1, Style A, Size 2, wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 of wood group I, II, III, or IV, Grade A of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

6. NOTES

6.1 Intended use. The cap is intended to be worn by the U.S. Coast Guard.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).
c. When first article sample is required (see 3.2), the item will be tested and should be a first article sample. The contracting officer should include specific instruction in acquisition documents regarding arrangements for examinations, quantity, and testing and approval of the first article.
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When palletization is required (see 5.4).

6.3 Samples, patterns, and blocks. For access to samples, patterns and blocks, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

6.4 The material for visorboard (see 3.3.2) has been obtainable from Texon, Inc., South Hadley, MA 01705 or Georgia Bonded Fibers, Inc., Buena Vista, VA 24416. The material for the size strip has been obtained from Victory Cap Front Manufacturing Company, Inc., 29th 4th Street, New York, NY 10012.

6.5 Sweatband. A suggested source of supply for the sweatband is John Soloman, Inc., 555 Somerville Avenue, Somerville, MA.

6.6 Equal item. Prior to the use of an "interchangeable" item, the contractor shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible Military Agency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

6.7 Subject term (key word) listing:

Back, adjustable
Blue 3376
Cotton, polyester, 65/35
Headwear
Utility

Custodian:
Navy - NU

Review Activity:
DLA - CT

Users:
Coast Guard - CG

Preparing Activity:
Navy - NU

Project No. 8405-0007

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

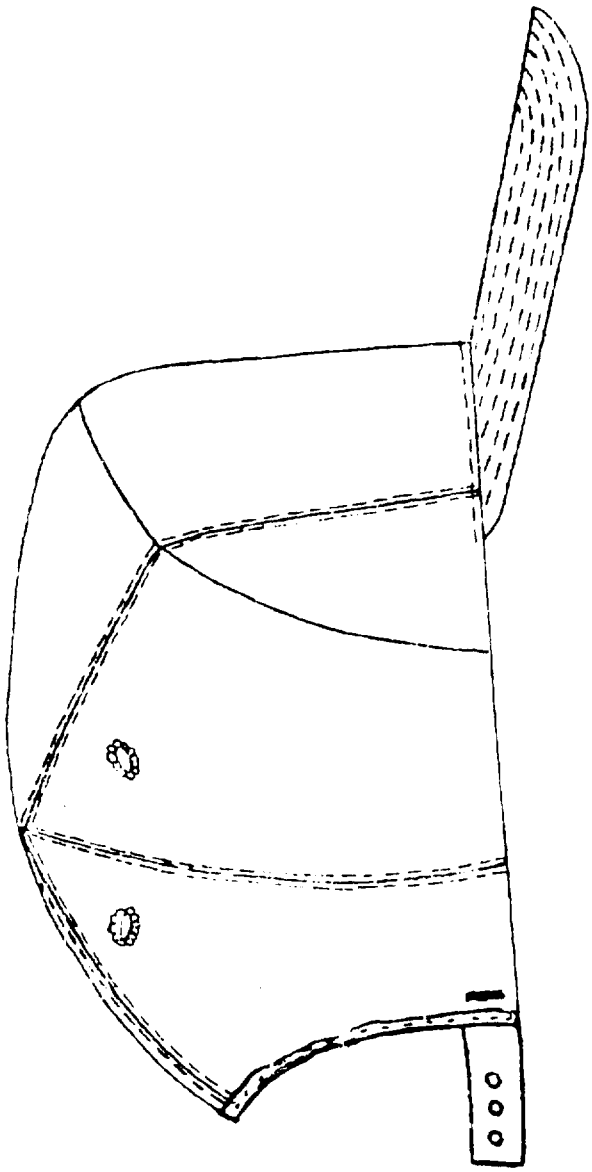


FIGURE 1 - CAP, MAN'S, UTILITY

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

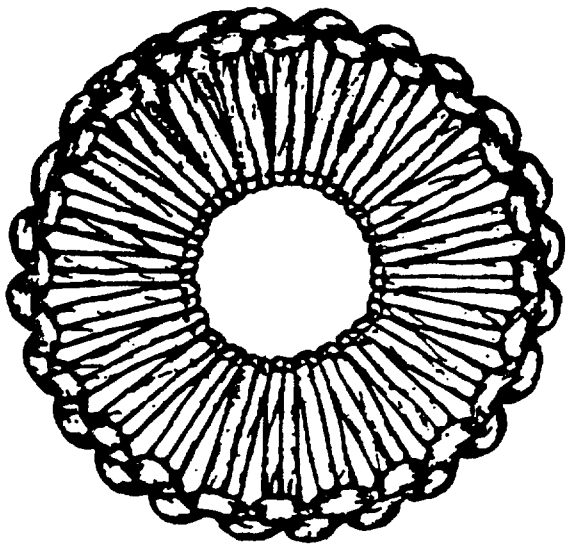


FIG. 2 STITCHED EYELET

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

RUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in itting comments and suggestions for improvements. All users of military standardization documents are invited to provide stions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and d. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was igid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the lems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an owledgement will be mailed to you within 30 days to let you know that your comments were received and are being dered.

E: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of fication requirements on current contracts. Comments submitted on this form do not constitute or imply authorization aive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

PARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

ICIAL BUSINESS
IALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
21 Strathmore Road (Code 50)
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-24924	CAP, MAN'S UTILITY

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:00Z
Check the source to verify that this is the current version before use.