MILITARY SPECIFICATION

CAP, COLD WEATHER

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a lined cold weather cap.

1.2 Classification. The cap shall be of one type only and in the following classes and sizes (see 6.2):

1.2.2 Classes.

Class 1 - Blue 3375, Flame Retardant Plain Weave

Class 2 - Green OG-107, Cotton/Nylon Sateen

1.2.3 Sizes.

Small (6-3/4 to 6-7/8)	Large (7-1/4 to 7-3/8)
Medium (7 to 7-1/8)	Extra Large (7-1/2 to 7-5/8)

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:04Z
Check the source to verify that this is the current version before use.

as specified

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	- Label; For Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-W-530	- Webbing, Textile, Cotton, General Purpose, Natural or in Colors
MIL-T-3530	- Thread and Twine; Mildew Resistant or Water Repellent Treated
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-C-17155	- Cloth, Knitted, Nylon Fleece
MIL-B-17757	- Boxes, Shipping, Fiberboard, (Modular Sizes)
MIL-F-21840	- Fastener Tape, Hook and Pile, Synthetic
MIL-C-24931	- Cloth, Plain Weave, Aramid, Water Repellent
MIL-C-24932	- Cloth, Knitted, Flame Resistant, Rayon/Wool Pile
MIL-C-43191	- Cloth, Wind Resistant, Sateen, Cotton and Nylon
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-T-83193	- Thread, Aramid, Spun Staple

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Load

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:04Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issue of documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Standard Shade for Thread - 1968

(Application for copies of color cards should be addressed to the Color Association of the U.S. Inc., 343 Lexington Avenue, New York, NY 10016).

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this specification shall take precedence. Nothing in this specification however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:04Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material.

3.3.1.1 Class 1. The basic material for the class 1 cap shall be aramid plain weave, water repellent fabric conforming to MIL-C-24931. The color shall be shade Blue 3375.

3.3.1.2 Class 2. The basic material for the class 2 cap shall be cotton/nylon sateen with a florocarbon type water repellent treatment, conforming to class 2 of MIL-C-43191, except that the requirements for infrared reflectance shall not apply. The color shall be green OG-107, piece number 3125.

3.3.2 Lining.

3.3.2.1 Class 1. The material for the lining of the class 1 cap shall be flame resistant rayon/wool knitted pile fabric conforming to MIL-C-24932. The color shall be shade blue 3375.

3.3.2.2 Class 2. The material for the lining of the class 2 cap shall be knitted nylon fleece conforming to type I of MIL-C-17155.

3.3.3 Visorboard. The material for the visorboard shall be composed of high alpha cellulose wood pulp, wet impregnated with compounded neoprene. The material shall conform to the following requirements when tested as specified in 4.4.1.

Thickness, inch	0.075 (± 0.003)
Weight, lbs/yd^2 (min.)	2.21 (± 0.11)
Tearing strength, gram/centimeter (min.)	
Machine direction	1412
Cross direction	1642
Tensile strength, lbs/in	
Machine direction	135
Cross direction	86
Stretch, percent, max.	
Machine direction	11.0
Cross direction	22.0
Neoprene content (percent)	
Max.	35.0
Min.	15

3.3.4 Webbing. The material for the chin strap shall be cotton, type IIa, class 3, 1 inch wide conforming to MIL-W-530. The color shall approximate the shade of the basic material.

3.3.5 Hook and pile fastener tape. The hook and pile fastener tapes shall conform to type II, class 1, 1 inch wide of MIL-F-21840. The color shall match Blue 3346 for the class 1 cap and green OG 106 for the class 2 cap.

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:04Z
Check the source to verify that this is the current version before use.

3.3.6 Thread.

3.3.6.1 Class 1. The thread for the class 1 cap shall be an aramid thread, conforming to MIL-T-83193. As an alternate, a para-aramid, spun staple thread, size 35 Tex may be used. The color of the thread shall approximate shade Blue, A.R., G.A. 66058. The thread shall meet commerically acceptable colorfastness requirements for aramid thread.

3.3.6.2 Class 2. The thread for the class 2 cap for seaming and stitching shall be polyester core covered thread conforming to ticket numbers 30 and 50, 2 or 3 ply of MIL-T-43548. The thread shall be water repellent treated conforming to type II, class 3 of MIL-T-3530. The color of the thread shall be shade Olive Drab S-1, C.A. 66022 of the Standard Shades for Thread. The polyester wrapped, polyester core thread is not allowed.

3.3.6.2.1 Colorfastness. The dyed thread shall show fastness to laundering equal to or better than the standard sample when tested as specified in MIL-T-43548. When no standard sample is available, the dyed thread shall show a minimum of "good" fastness to laundering when tested as specified in MIL-T-43548.

3.3.7 Labels.

3.3.7.1 Identification/instruction label. Each cap shall have a combination identification/instruction label conforming to type VI, class 15 of DDD-L-20. The printing shall show fastness to laundering and shall bear the following inscription and format for the class 1 cap:

CAP, COLD WEATHER, FLAME RESISTANT, CLASS 1 (EXAMPLE)
FIBER CONTENT: SHELL 100% Aramid
LINING 65% Rayon - 35% Wool Pile
100% Aramid back
CONTRACT NO.: DLA 100-00-0-0000 (EXAMPLE)
NAME OF CONTRACTOR:

LAUNDERING INSTRUCTIONS

1. Wash cap in hot water (120° to 140°) using detergent.
2. Rinse thoroughly 2 or 3 times in hot water. Tumble dry.
3. DO NOT USE STARCH OR BLEACH. DO NOT DRY CLEAN.

OR

Follow NAVEDTRA Manual
414-01-45-81
Formula II

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:04Z
Check the source to verify that this is the current version before use.

The following inscription and format shall be for the class 2 cap:

CAP, COLD WEATHER, PERMEABLE CLASS 2 (EXAMPLE)
FIBER CONTENT: SHELL - 50% Cotton/50% Nylon
LINING- 100% Nylon
CONTRACT NO: DLA 100-00-0-0000 (EXAMPLE)
NAME OF CONTRACTOR:

Note: The laundering instructions shall be the same as the class 1 cap.

3.3.7.2 Size label. Each cap shall have a size label conforming to Type VI, class 2 of DDD-L-20. The label shall bear the following inscription:

SIZE: M 7 - 7 1/8) (EXAMPLE)
STOCK NUMBER: 8415-00-000-0000 (EXAMPLE)

3.4 Design. The class 1 cap shall be made of a water repellent, flame resistant fabric lined with a knitted flame resistant rayon/wool pile fabric. The cap shall be a ski-type style with a multi-stitched visor and a retractable extension flap for protecting the ears. The flaps shall have webbing with hook and pile fastener tape for holding flaps down or up. The class 2 cap shall be of the same design except that the material shall be a water repellent, wind resistant cotton/nylon sateen cloth and lined with a nylon knitted fleece. (see figure 1)

3.4.1 Figure. The figure is furnished for information purposes only. When inconsistencies exist between the specification and the figure, the specification shall govern.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The patterns allow 1/4 (± 1/16) inch for all seams, except as otherwise indicated in Table I. The working pattern shall be identical to the Government pattern. Neither the Government pattern or the working pattern shall be altered in any way.

3.5.1 List of pattern parts. The component parts of the caps shall be cut from material as specified and in accordance with the pattern parts required for the manufacturing process as follows:

Materials	Nomenclature of pattern parts	Cut parts
Basic material	Crown top	1
	Crown side	2
	Extension flap	1
	Visor, top ply	1
	Visor, bottom ply	1
Lining material	Crown top lining	1
	Crown side lining	2
	Extension flap lining	1
Alpha cellulose wood pulp	Visorboard	1

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:04Z
Check the source to verify that this is the currentversion before use.

NOTE: Pattern parts for the sweatband and crown band pieces are not provided. Cut in accordance with table I, operation 1.c.

3.6 Construction.

3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation any one may be used. Seam allowance shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the cap. Topstitching, raisestitching and edgestitching shall be 1/16 to 1/8 inch from the edge.

3.6.2 Thread breaks and end of seams. End of all seams and stitching when not caught in other seams or stitching shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be repaired by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired by using 301 stitch type. When ends of overedge stitching are not caught in other seams or stitching, the ends shall be tacked.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7 Manufacturing operations requirements. The caps shall be manufactured in accordance with the operations shown in Table I. The contractor is not required to follow the exact sequence of operations provided that the cap is identical to that produced by following the sequence as listed in Table I.

3.7.1 Abbreviations in table of operations. The abbreviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:04Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF CAP

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
1.	Cutting.					
	a. The cap shall be cut in strict accordance with patterns furnished, which show size, directional lines for cutting, and notches for proper assembly of component parts.					
	b. The pile or fleece side of the knitted fabric shall be the face of lining material.					
	c. Cut all conponents from the same piece of material except for the sweatband and crown band, which may be cut from ends or cut and placed on rolls. When not cut from same piece, the sweatband and crown band must match the main assembly.					
	d. Cut the sweatband and crown band 1-1/2 (+ 1/4) inches wide, turning in 1/4 inch on each edge to finish 1 (+ 1/4) inch finish width. The bands shall be cut of sufficient length to meet the cap measurements. The turned under ends shall be stitched 1/8 inch from edge with 10-12 stitches per inch and using 301 or 401 stitching types.					
	e. Cut the chin strap webbing long enough in order that when attached and closed there will be no pulling on the flaps.					
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade and size marking.					
	a. All parts shall be marked, ticketed or bundled to assure a uniform shade and proper assembly throughout the cap. Parts cut from ends need not be marked, however they must match the main assembly.					
	b. The use of corrosive metal fastening devices or sew-on tickets is prohibited.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:04Z
Check the source to verify that this is the currentversion before use.

ment to the extent specified herein. Unless ... form a part of this docu

TABLE I - CONSTRUCTION OF CAP

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	c. Adhesive type shade tickets which discolor or adhere to the material upon removal of tickets shall be prohibited.					
	d. The use of ink pad numbering machine, rubber stamp, or pencil is acceptable, provided the numbers are legible and do not show on the outside of cap and whenever possible the numbers shall be covered by the seam allowance.					
4.	Join crown side and top pieces of basic material.					
	a. Join crown side pieces at center front, face to face, 1/4 inch from the edge; turn seam allowance to the right side as worn, and edgestitch on right side crown.	301 or 401 and 301	LSq-2	10-14	30 30 30	30 50 30
	b. Stitch top edge of crown band to side crown, with stitching 1/8 inch from edge. The bottom folded edge of the band shall be overlapping the bottom of the side crown pieces by 3/16 to 1/4 inch.	301 or 401	LSbj-1	10-14	30 30	30 50
	c. Stitch crown side pieces with crown band at center back, face to face, 1/4 to 5/16 inch from raw edge.	301	SSa-1	10-14	30	30
	d. Join crown side pieces to crown top piece as indicated by notches on pattern, face to face, 1/4 to 5/16 inch from the edge; turn seam allowance down and edgestitch on side crown pieces.	301 or 401 and 301	LSq-2	10-14	30 30 30	30 50 30
5.	Join crown side lining pieces and crown top lining.					
	a. Join crown side lining pieces at center front, face to face, 1/4 inch from the edge.	301 or 401	SSa-1	10-14	30 30	30 50
	b. Doublestitch inner sweatband to lower edge of side crown lining pieces, 5/8 inch gauge, with the top row of stitching 1/8 inch from top edge of band.	301	LSbj-2	10-14	30	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:04Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF CAP

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	c. Stitch the center back seam of the side crown lining pieces with sweat band together, face to face, 1/4 inch from edge.	301	SSa-1	10-14	30	30
	d. Center and stitch the four sides of the identification/instruction label to the face side of the center back seam joining the crown side lining pieces.	301	LSbj-1	10-14	30	30
	e. Center and stitch the four sides of the size label to the face side of the crown top lining piece. The top of the label shall be towards the back of the cap.	301	LSbj-1	10-14	30	30
	f. Join 1/4 inch from the edge crown side lining pieces to crown top lining piece as indicated by notches on pattern, face to face, with center front and center back seams spread open.	301 or 401	SSa-1	10-14	30 30	30 50
6.	Make extension flap.					
	a. Stitch outer shell extension flaps to extension flap lining, face to face, 1/4 inch from edge along the sides and bottom edge, catching the chin strap in the stitching. The strap shall be positioned in accordance with marks on the patterns. Attach the hook tape to outer sides of flap according to marks on pattern and the pile tape to finished end of chin strap. The fastener tape shall be stitched on all four sides.	301	SSa-1	10-14	30	30
	b. Turn flap to finished position, working out edges.					
	c. Stay stitch the top raw edges of the shell and lining flap together, 1/4 inch from edge.	301	SSa-1	10-14	30	30
7.	Make visor.					
	a. The visor shall be made of two plies of the basic material interlined with a visorboard.					
	b. Seam the outer edge of the top and bottom ply of the visor pieces together along the outer arc 1/4 (+1/16) inch from the edge. Turn to finish position, forcing out edges.	301 or 401	SSa-1	10-14	30 30	30 50

Source: https://assist.dla.mil -- Downloaded: 20260,0-20T03:04Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF CAP

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	c. Insert visorboard so that it is up against front edge. The stitching and seam allowance shall be on the underside of the visor.					
	d. Stitch the two plies of basic material (visor pieces only), along the inner edge (arc). The stitching shall be not more than 1/32 inch from edge of visorboard interlining. Do not catch visorboard in the stitching.	301 or 401	SSa-1	10-14	30 30	30 50
	e. Stitch four rows of stitching through all plies of material 3/16 to 1/4 inch apart equally spaced, following the contour of the outer arc. The outer row of stitching shall be 1 (± 1/8) inch from the outer arc.	301	SSv-4	10-14	30	30
8.	Attach visor and flaps to lining.					
	a. Prior to sewing visor to lining, place a cut or notch 1/4 inch long in the center of material seam allowance on the visor.					
	b. Position visor and flap to inside of side crown lining pieces, 1/4 inch in from bottom edge of sweatband, with notch on visor aligned with center seam of lining side crown pieces and flaps abutting edges of visor, and stitch 1/8 to 3/16 inch from folded edge of sweatband through all plies.	301	LSb-1	10-14	30	
9.	Join visor and extension flap to outer shell.					
	a. Match notch on visor with center front seam of crown side pieces and stitch the inner edge of visor and flaps to lower edge of crown side pieces with the row of stitching superimposed over the stitching enclosing inner edge of visor and flaps. The stitching shall be superimposed on sweat band stitching.	301 or 401	SSa-1	10-14	30 30	30 50
	d. Turn cap to finished position.					

Source: https://assist.dla.mil --Downloaded: 202610-20T03:04Z
Check the source to verify that this is the current version before use.

shall be black non-marking producing only d. Color. The colo

TABLE I - CONSTRUCTION OF CAP

Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr

eaning.

Trim and remove all ends of thread.

Caution shall be made so not to harm the terial when trimming.

Remove all spots and stains.

Remove all shade tickets.

ocking.

Steam cap with flap folded on the outside id chin strap fast ened on correct size, rcumference and shape block. Cap shall be ied before removal from block.

Corresponding cap and block size shall be follows:

p sizes	Block size/ cirumference
all (6-3/4 - 6-7/8)	6-7/8 / 21-7/8
dium (7 - 7-1/8)	7-1/8 / 22-5/8
rge (7-1/4 - 7-3/8)	7-3/8 / 23-3/8
Large (7-1/2 - 7-5/8)	7-5/8 / 24-1/8

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:04Z
Check the source to verify that this is the currentversion before use.

3.8 Sizes and measurements. The sizes and measurements of the finished cap shall be in accordance with Table II. Measurements and tolerances are in inches.

Table II - Sizes and measurements

Sizes	Circum-ference	Depth of visor	Depth of crown (front side)	Depth of crown (back) side and extension flap (combined)
Small (6-3/4 - 6-7/8)	21-7/8	2-3/4	2	6-5/8
Medium (7 - 7-1/8)	22-5/8	2-3/4	2-1/4	7
Large (7-1/4 - 7-3/8)	23-3/8	2-3/4	2-1/2	7-3/8
X-Large (7-1/2 - 7-5/8)	24-1/8	2-3/4	2-3/4	7-3/4
Tolerance	± 1/4	± 1/4	± 1/8	± 1/4

Circumference - Measurement shall be taken at bottom of crown with the extension flap folded up outside and chin strap fastened. Measuring device shall not be placed into cap deeper than 3/4 inch.

Depth of visor - Measurement shall be taken from the outer edge of visor to the bottom of seam joining crown sides at center front.

Depth of crown (front side) - Measurement shall be taken from the inner edge of visor to the top of seam joining crown sides at center front.

Depth of crown (back side) and extension flap (combined) - Measurement shall be taken from the top of seam joining crown sides at center back to bottom edge of extension flap.

3.9 Workmanship. The finished caps shall conform to the quality established by this specification. The occurence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:04Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2, shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, appearance and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition, the contractor shall furnish a certificate of compliance for the visor requirements of 3.3.3.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 through 4.4.2.3. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.4. The sample unit shall be one finished cap. The lot size shall be expressed in units of caps.

4.4.2.1 Visual examination. The caps shall be examined for defects in color, design, material, construction, workmanship and marking and defects classified in accordance with the list below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:04Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
I. MATERIAL DEFECTS AND WORKMANSHIP DAMAGES			
a. Hole, cut, tear, smash, scorched area, knot or slub, burn, drill hole or open place:			
1. On outside (longest dimension in any direction):			
(a) up to 1/4 inch inclusive		X	
(b) more than 1/4 inch	X		
2. on inside (longest dimension in any direction):			
(a) up to 1/4 inch inclusive			X
(b) more than 1/4 inch		X	
b. Misweave, area of no dye penetration, dye streak, thin place, visible mend, broken-loose or missing yarn, course yarn, snagged thread, woven in waste or shade bar, more than 1/2 inch (largest dimension in any direction):			
On outside		X	
c. Permanents fold, pleat or crease in cloth (when caught in seaming or stitching):			
On outside		X	
d. Needle chew on outside:			
1. Up to 1/4 inch inclusive		X	
2. More than 1/4 inch	X		
e. Not material specified	X		
II LINING MATERIAL			
a. Lining not napped or area of no nap (bald spot)	X		
b. Loose knit causing sleaziness, sluby yarn or dropped stitch		X	

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:04Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
III SHADED PARTS			
a. On outside:			
1. Any part shaded (except parts cut from ends)		X	
2. Parts cut from ends badly shaded			X
3. Variation in shade within a part		X	
IV CLEANNESS			
a. Spot or stain on outside:			
1. Up to 3/8 inch inclusive			X
2. More than 3/8 inch up to 3/4 inch inclusive		X	
3. More than 3/4 inch	X		
b. Thread ends not trimmed -			
1. Three or more thread ends not trimed to less than 1/4 inch on the outside		X	
2. Five or more thread ends not trimmed to less than 1/2 inch on the inside			X
c. Two or more shade or size tickets not removed			X
d. Any marking exposed or readily visible on outside of cap			X
V COMPONENTS AND ASSEMBLY			
a. Any component part or operation omitted (unless otherwise classified herein)	X		
b. Any component not as specified	X		
c. Any component part tight, twisted, distorted, pleated or full (unless otherwise classified herein)		X	
d. Any operation not as specified		X	
VI CUTTING			
Any component part not cut in accordance with specified patterns, directional lines on patterns or not in accordance with specification requirements.	X		

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:04Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
VII SEAMS AND STITCHING			
a. Accuracy of seaming			
1. Seams twisted, puckered or pleated (unless otherwise classified herein)			X
2. Part of cap caught in any unrelated operation or stitching		X	
3. Ends of seams or stitchings when not caught in other seams or stitchings backtacked less than 3/8 inch			X
4. Stitching overlapping ends of thread breaks less than 1/2 inch			X
5. Ends of a continuous line of stitching overlapped less than 1/2 inch			X
b. Gauge of stitching (edge or raised stitching)			
1. Gauge irregular or not within range specified (to be scored only when condition exists on more than 1/2 the length of seam)			X
2. Edge or raised stitching sewn too close to edge, resulting in damage to cloth		X	
3. Seam allowance not as specified or varies more than 1/16 inch when no range is specified		X	
c. Open seam or runoff			
1. Seam joining visor and extension flap to crown side pieces:			
- less than and up to 1/4 inch			X
- more than 1/4 inch		X	
2. All other seams:			
- 1/8 inch but not more than 3/4 inch			X
- more than 3/4 inch		X	

NOTE: One or more broken or two or more continuous skipped or runoff stitches constitutes an open seam.

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:04Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
d. Raw edge			
1. On outside:			
- up to 1/2 inch inclusive			X
- more than 1/2 inch		X	
2. On inside:			
- more than 1 inch			X
e. Seam and stitch types			
1. Not specified seam or stitch type		X	
2. Looper thread of 401 stitch type on outside	X		
3. Any line of stitching omitted	X		
4. Any line of stitching not beginning or ending where specified			X
f. Stitch tension			
1. Loose tension resulting in a loose seam			
(a) up to 1/2 inch, inclusive			X
(b) more than 1/2 inch up to 3/4 inch inclusive		X	
(c) more than 3/4 inch	X		
2. Loose tension on edge or raised stitching resulting in loosely exposed loops of lower or top thread			X
3. Tight tension (stitches break when normal strain is applied to the seam or stitching)	X		
g. Stitches per inch			
1. One stitch less than minimum specified except on label			X
2. Two or more stitches less than the minimum specified except on label		X	
3. Any number of stitches in excess of the maximum specified			X
4. One or more stitches less than the minimum specifed on label			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:04Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
h. Skipped or broken stitches			
1. On edge or raised stitching, when seam is seamed, turned and stitched or visor quilting stitching:			
- 1/4 inch or more	X		
i. Runoff			
1. On joining seams, when resulting in an open seam score as an open seam			
2. On raised or top stitching when not resulting in an open seam (outside only)			
- more than 1/2 inch			X
VIII HOOK AND PILE FASTENER TAPE			
a. One or more omitted or added	X		
b. Tape not corresponding in size and type so that the tape does not close properly	X		
c. Tape not securely caught in fabric	X		
d. Tape not correct type, size or color	X		
e. Tape not positioned as specified		X	
IX CROWN			
a. Other than 3-piece crown	X		
b. Lining:			
1. Reversed	X		
2. Tight, short or twisted causing fullness or twist on the outside		X	
X WEBBING			
a. Incorrect color, size, type of webbing	X		
b. Webbing incorrect length causing flap to be distorted		X	
c. Missing, or misplaced	X		
XI SWEATBAND AND CROWN BAND			
a. Incorrect length and width	X		
b. Not correctly stitched	X		

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:04Z
Check the source to verify that this is the currentversion before use.

Defects	Classification Major	Minor A	Minor B
XII EXTENSION FLAP			
a. Off center from back seam:			
1. 1/4 inch or more but less than 1/2 inch			X
2. 1/2 inch or more		X	
b. Badly twisted			X
XIII LABELS			
a. Omitted	X		
b. Misplaced			X
c. Not stitched on all four sides			X
d. Inscription missing, incorrect or illegible	X		
XIV VISOR			
a. Off center:			
1. 1/4 inch or more but less than 1/2 inch			X
2. More than 1/2 inch inclusive		X	
b. Quilted with less than 4 rows of stitching			X
c. Quilted stitching less than 3/16 inch or more than 5/16 inch apart or not evenly spaced			X
d. Upper part of visor puckered, twisted or pleated by quilting stitching			X
e. Inner edges not stitched prior to joining to crown side pieces			X
f. Visorboard caught in stitching enclosing inner edge of visor			X

4.4.2.2 Dimensional examination. Any measurement deviating from the normal dimensions and tolerances specified in Table II shall be scored as a measurement defect.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed as defects per 100 units, for visual and dimensional examination shall be as follows:

	AQL's	Inspection level
For examination in 4.4.2.1		
Major	2.5	II
Major and Minor A, combined	10.0	II
Total (Major, Minor A and Minor B combined)	25.0	II
For examination in 4.4.2.2		
One class	4.0	S-3

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:04Z
Check the source to verify that this is the current version before use.

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing and marking complies with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defects
Marking (interior and exterior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Material	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling. Distorted or bulging containers.
Content	Number of caps per package and shipping container is more or less than specified. 1/
	Size shown on item not as specified on package or container. 1/

1/ For these defects, one package shall be examined from each shipping container in the sample.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 as specified in MIL-STD-105.

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:04Z
Check the source to verify that this is the currentversion before use.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each cap shall be neatly folded in half by bringing the back portion of the crown toward the front of the cap.

5.1.2 Level C. Caps shall be packaged to afford adequate protection against corrosion and physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Thirty-six (36) caps, of one size and class only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c, size 2A of MIL-B-17757. The fiberboard for the liner shall be type CF, class domestic and shall be in accordance to MIL-B-17757. Level A packages shall be packed flat, nine in length, two in width and two in depth within the shipping container, with the cap peaks facing the bottom of the box. Each end of the pack shall be filled with crumpled paper to hold the caps in place. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or order, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Thirty-six (36) caps, of one size and class only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, variety DW, grade 200, size 2A of MIL-B-17757. The fiberboard for the liner shall be type CF, class domestic in accordance with the requirements of MIL-B-17757. Level A packages shall be packed flat, nine in length, two in width, and two in depth within the shipping container, with the cap peaks facing the bottom of the box. Each end of the pack shall be filled with crumpled paper to hold the caps in place. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or order, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Level C. Caps, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Container shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:04Z
Check the source to verify that this is the current version before use.

5.3 Palletization. When specified (see 6.2), item, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be banded with primary and secondary straps in accordance with the banding means C, K and L, or O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, Type IV; Type V, class 1, size 2; or Type VIII, fabricated from wood groups I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contacting officer.

5.4 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.4.1 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED NSN" plainly printed or stamped theron and under these words shall be legibly printed or stamped the correct quantity and National Stock Numbers contained therein.

6. NOTES

6.1 Intended use. The cap covered by this specification is intended to be worn in conjuction with the Jacket and Trousers, Cold Weather.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Sizes and class required (see 1.2).
(c) When first article is required (see 3.2 and 4.3), the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity and testing and approval of the first article.
(d) Selection for applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When palletization is required (see 5.3).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:04Z
Check the source to verify that this is the current version before use.

6.4 Superseding data. The class 2 cap shall be superseding MIL-C-21709; Cap, Cold Weather, Permeable.

6.5 Subject term (key word) listing.

Cap, fire retardant plain weave
Cap, cotton/nylon sateen
Cap, ski style with flaps
Cap, cold weather with lining
Outfit, cold weather

Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review activities:
DLA - CT

Project no. 8415-0581

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:04Z
Check the source to verify that this is the current version before use.

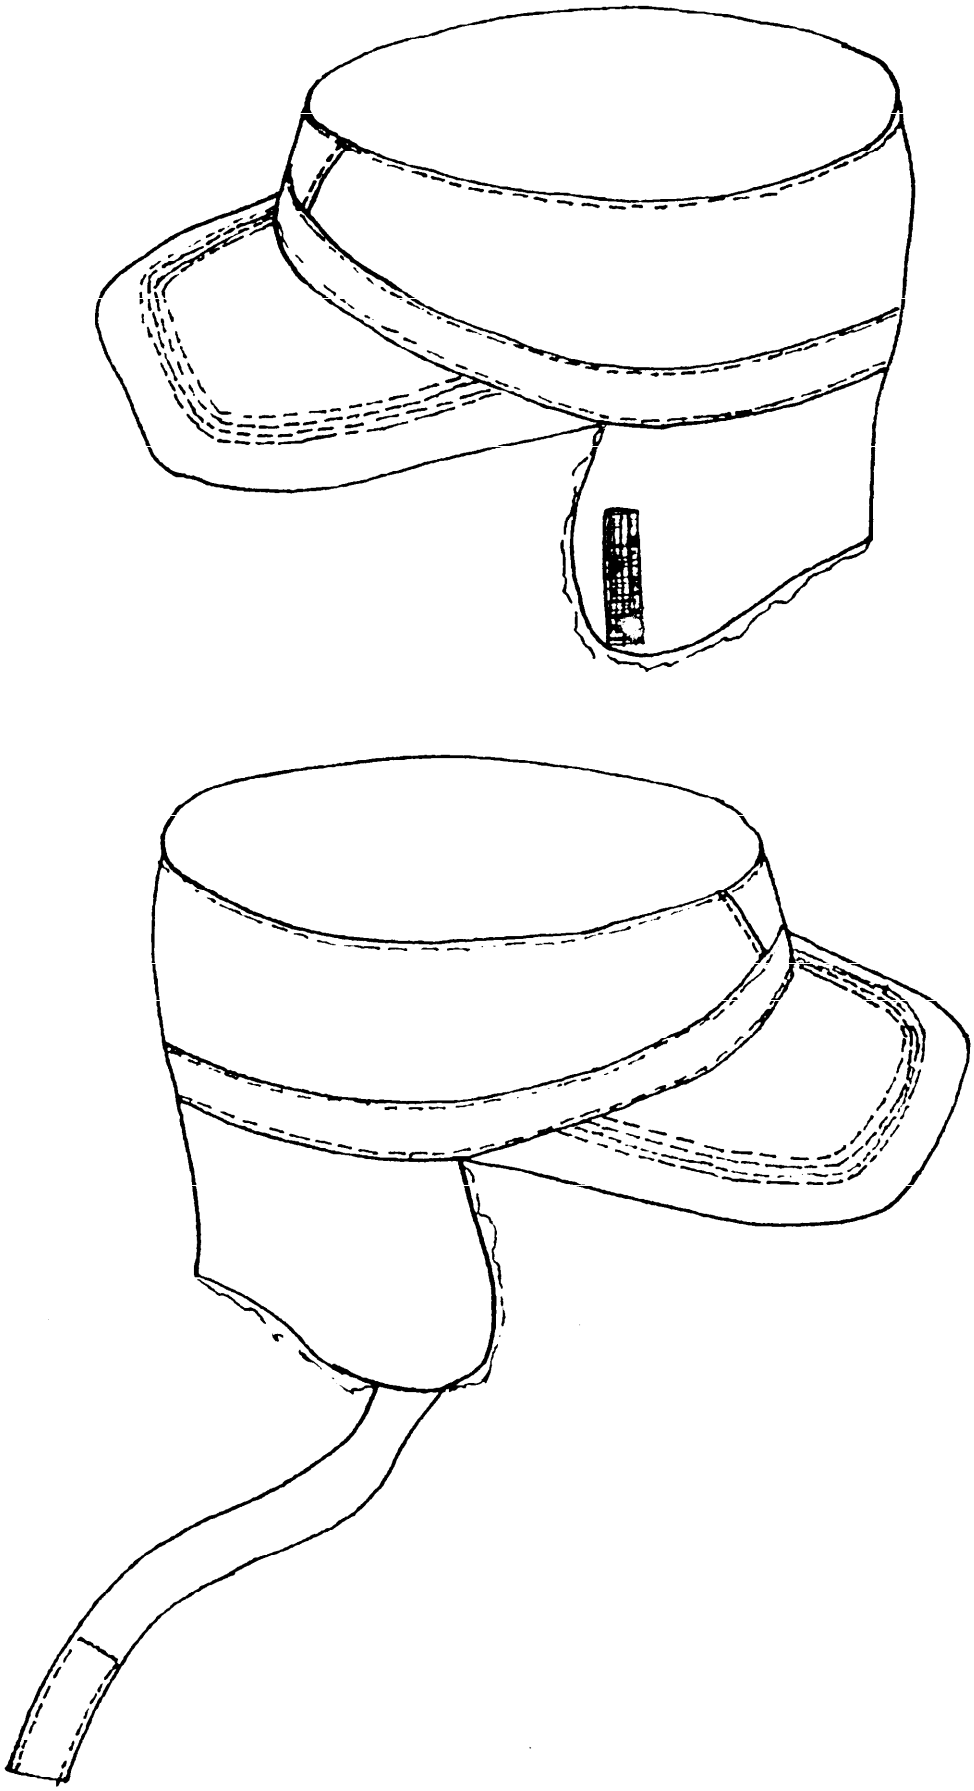


FIGURE 1 — CAP, COLD WEATHER, FLAME RESISTANT

U.S. GOVERNMENT PRINTING OFFICE: 1987 - 704-434/70048

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:04Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Navy Clothing & Textile Research Facility
21 Strathmore Road (Code 50)
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-24930	CAP, COLD WEATHER

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:04Z
Check the source to verify that this is the current version before use.