INCH-POUND

MIL-C-24937A
02 June 1993
SUPERSEDING
MIL-C-24937
24 September 1987

MILITARY SPECIFICATION

CAP, COMBINATION, MAN'S, (CG)

This specification is approved for use by the United States Coast Guard, Department of Transportation, and is available for use by all departments and agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for cap frames, covers, mounts and bands to be worn by male personnel of the Coast Guard.

1.2 Classification.

1.2.1 Cap frame. The cap frame shall be procured with black porameric chin strap and front stand with removable crown support wire in the following types, classes, and sizes as specified (see 6.2).

Type I - Frame with cloth top visor
Class 1 - for flag rank officers with 2 gold buttons
Class 2 - for Captains and Commanders with 2 gold buttons

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Type II - Frame with high gloss black porameric visor with 2 gold buttons

Schedule of sizes	
6-1/2	7-1/4
6-5/8	7-3/8
6-3/4	7-1/2
6-7/8	7-5/8
7	7-3/4
7-1/8	7-7/8
	8

* 1.2.2 Cap cover. The cap cover shall be one of the following types:

Type I - Cap cover, when procured as assembled combination cap.
Type II - Cap cover, when procured separately

The sizes shall correspond to the cap frame sizes as follows:

S (6-1/2, 6-5/8, 6-3/4, 6-7/8)
M (7, 7-1/8, 7-1/4)
L (7-3/8, 7-1/2, 7-5/8)
XL (7-3/4, 7-7/8, 8)

1.2.3 Mount and band. The mount shall be one of the following types:

Type I - Commissioned Officers and Chief Warrant Officers
Type II - Chief Petty Officers and enlisted men

The band shall be one type and sized to fit over frame and cover.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

L-P-390 - Plastic, Molding and Extrusion Material, Polyethylene and Copolymers (Low, Medium, and High Density
A-A-50199 - Thread, Polyester Core, Cotton-, or Polyester-Covered

Source: https://assist.dla.mil - Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

A-A-52094	- Thread, Cotton
V-T-295	- Thread, Nylon
NN-P-71	- Pallet, Material, Handling, Wood Stringer Construction, 2 Way and 4 way
UU-P-31	- Paper, General Specification and Methods for Testing
CCC-C-700	- Cloth, Coated, Vinyl Coated (Artificial Leather)
DDD-L-20	- Label; for Clothing, Equipage, and Tentage (General Use)
A-A-52067	- Binding, Textile, Cotton, Bias-Cut
PPP-B-566	- Boxes, Folding, Paperboard
PPP-B-636	- Boxes, Shipping, Fiberboard

MILITARY

MIL-C-823	- Cloth, Serge; Wool, Wool and Nylon, Polyester and Wool
MIL-B-3461	- Buttons, Insignia, Metal, Uniform and Cap
MIL-S-3577	- Sweatband, Headwear, Leather
MIL-P-15011	- Pallets, Material Handling, Wood Post Construction, 4 Way Entry
MIL-C-16290	- Cloth, Melton, Wool (mothproofed)
MIL-S-17615	- Strap, Chin (Navy and Coast Guard)
MIL-E-17568	- Embroidery Materials, Metallic and Synthetic Metallic
MIL-C-24927	- Cloth, Twill, Polyester/Cotton (Durable Press)
MIL-S-43993	- Sweatband, Headwear, Artificial Leather
MIL-P-55010	- Plastic, Sheet, Polyethylene Terephthalate
MIL-C-82252	- Cloth, Broadcloth, Wool, and Wool-Synthetic (Moth-Proofed)

STANDARDS

FEDERAL

FED-STD-151	- Textile Test Methods
FED-STD-311	- Leather, Methods of Sampling and Testing
FED-STD-595	- Colors
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

RULES AND REGULATIONS UNDER THE TEXTILE FIBER PRODUCTS IDENTIFICATION ACT

(Copies may be obtained without charge from the Federal Trade Commission, Washington, DC 20580-0001).

U.S. POSTAL MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

2.2 Non-Government Publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Sewing Threads

(Applications for copies should be addressed to The Color Association of the United States, 409 W 44th St., New York, NY 10036.)

TECHNICAL MANUAL OF THE AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

Source: https://assist.dla.mil Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Method No. 8 - 1988 Colorfastness to Crocking: AATCC Crockmeter Method
Method No. 16 - 1982 Colorfastness to Light: General Method

(Applications for copies should be addressed to the AATCC National Headquarters, P.O. Box 12215, Research Triangle Park, NC 27709-2215.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS

D 1424-83 Test for Tear Resistance of Woven Fabrics by Falling-Pendulum (Elmendorf) Apparatus

(Applications for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

* 3.1 Samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Cap frame

3.3.1.1 Visor.

3.3.1.1.1 Cloth, wool or wool/synthetic. The cloth used for the type I cap frame visor top shall conform to type I, class 2 of MIL-C-16290 or type I, class 3 or type II, class 3 of MIL-C-82252.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

3.3.1.1.2 Plastic. The plastic used for the type II cap frame visor top and chin strap shall be smooth, high-gloss, 100 percent polyurethane, unsupported porameric material, 0.045 (± 0.003) inches thick, 17.0 (± 1) ounce per square yard, pigmented black approximating shade number 17038 of FED-STD-595 as specified in 4.4.1.

3.3.1.1.3 Cloth, cotton twill. The cloth, unbleached, shall be suitable for laminating to the wool broadcloth or melton as specified in 3.3.1.1.1 and shall be used on the type I cloth visor top. The cloth shall have a minimum of 72 ends and 60 picks per inch, weigh 6 to 8 ounces per square yard, and shall have a maximum of 15 percent starch and protein content including chloroform and water-soluble material when tested as specified in 4.4.1.

3.3.1.1.4 Plumper paper. A suitable commercial plumper paper shall be used for laminating to the porameric material in the fabrication of the type II porameric visor top. The plumper paper shall be 0.020 (± 0.002) inch thick and properly treated so that it retains its original shape after being subjected to the immersion test specified in 4.4.1.

3.3.1.1.5 Leather. The leather used in fabricating the visor bottom of types I and II cap frame visors shall be constructed of reconstituted leather (commercially referred to as PARLON), in a black pebbled gloss finish and shall be 6.0 to 6.5 ounces thick. The leather shall be tested as specified in 4.4.1.

3.3.1.1.6 Binding. The binding for type I and II visor edge shall be made from a plastic film, weighing not less than 12 ounces per square yard, and having a thickness of not less than 0.0013 inch. The plastic film shall have a smooth high finish, and the color shall match the type II visor top as specified in 3.3.1.1.2. The binding shall not crack and shall show no evidence of tackiness. The binding shall be tested as specified in 4.4.1.

3.3.1.1.7 Adhesive. The adhesive used for bonding the component parts of the visor shall be water resistant and made from either natural or synthetic rubber. Testing shall be as specified in 4.4.1.

3.3.1.1.8 Embroidered visors (type I frame). When cloth top visors are to be embroidered, the embroidery materials shall conform to type III, class 8, of MIL-E-17568 (see Figure 2).

3.3.1.2 Front stand.

3.3.1.2.1 Stay. The stay for front stand consist of a twin wire tape stiffener, a molded clear vinyl or polyvinyl chloride stand, and a paper board support piece. The stay components shall meet the following requirements when tested as specified in 4.4.1.

Source: https://assist.dla.mil Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

3.3.1.2.1.1 Twin wire tape stiffener. The twin wire tape shall be muslin covered measuring 1 inch wide. The steel wire used in the tape shall be hard rolled, cold finished carbon steel, galvanized, flat wire, and shall be 0.016 (± 0.002) inch thick by 0.090 (± 0.004) inch wide.

3.3.1.2.1.2 Vinyl or polyvinyl chloride stiffener. The molded clear vinyl or polyvinyl chloride stiffener shall be heat sealed, 3 ply, 0.020 inch clear virgin vinyl or polyvinyl chloride as shown by the standard sample.

3.3.1.2.1.3 Support piece. The support piece shall be made of a semi-flexible black paperboard material approximately 1-1/2 inches wide by approximately 6 inches long with a minimum thickness of 0.030 inch.

3.3.1.2.2 Stay. As an alternate, the front stand may be made of a high density (linear) polyethylene plastic material, white or natural in color, conforming to type I, II, or III, class H, grades 1 or 2 of L-P-390, except that the low temperature brittleness, dielectric constant, dissipation factor, and thermal stress cracking requirements shall not be applicable. The front stand may be a one piece molded stay with support piece and front stay as one unit. The minimum thickness of the plastic material shall be 0.050 inch.

3.3.1.2.3 Front stay binding. Binding to cover front stay or alternate front stay shall be a vinyl coated cloth, untreated white shade conforming to class 7 of CCC-C-700, with the following exception:

a. Width of base and coated cloths are not required.
b. Commercial designation of base cloth shall be 3.70 ounces per square yard.
c. Weight of coated cloth shall be 15.0 ounces per square yard (minimum).
d. Coated weight shall be 12 ounces per square yard (minimum).
e. Grain shall be simulated twill weave embossing or smooth.

3.3.1.3 Inner band. The inner band shall be made from a high density (linear) polyethylene in flat stock or molded form conforming to the requirements specified in 3.3.1.3.1 and 3.3.1.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

3.3.1.3 1 Standard inner band. The high density (linear) polyethylene plastic material shall be black in color conforming to types I, II, or III, class H, grades 1 or 2, of L-P-390, except that the low temperature brittleness, dielectric constant, dissipation factor, and thermal stress cracking resistance requirements shall not be applicable. The standard inner band shall be made from flat stock that has been extruded, stripped, split, or cut 2 (± 1/8) inches in width, 0.050 to 0.070 inch in thickness, and shall be perforated. A margin of 1/4 inch at the top and bottom edges of the band material shall be unperforated. Testing shall be as specified in 4.4.1.

3.3.1.3.1.1 Stiffness. The standard inner band material shall have a stiffness (scale reading) between 22-38 inclusive when tested as specified in 4.4.1.

3.3.1.3.1.2 Bending. The standard inner band material shall show no evidence of cracking after the bending test specified in 4.4.1.

3.3.1.3.2 Alternate inner band. The alternate inner band shall be made from the material specified in 3.3.1.3.1, meet the requirements of 3.3.1.3.1.1 and 3.3.1.3.1.2, and shall be molded in a cane interlaced chair seat design on one or both sides. The top and bottom margins shall finish 3/16 to 1/4 inch in width and shall be 0.060 to 0.075 inch in thickness. The thickness of the material in the chair seat design area shall be approximately 0.010 inch less than that in the margins. The finished width of the inner band shall be 2 (± 1/8) inches. Testing shall be as specified in 4.4.1.

3.3.1.3.3 Cloth, polyester/wool serge. The cloth used for covering the bottom edge of the inner band on type I and II cap frames shall conform to type III, class 3 of MIL-C-823. The color shall be Blue 3362. The piece number for the standard sample is 80353.

3.3.1.4 Sweatband. The sweatband shall be made from either sheepskin leather conforming to MIL-S-3577 or from artificial leather conforming to MIL-S-43993. The sweatband shall finish 1-1/2 to 1-3/4 inches in width and shall be black or brown in color. The finished sweatband shall contain perforations that are evenly spaced.

3.3.1.5 Sweatband welt. The material used for the sweatband welt shall be as unsupported flexible vinyl film, 0.010 inch minimum thickness and crack resistant at 0° F. The color of the film shall approximate the shade of the sweatband or be black. Testing shall be as specified in 4.4.1.

3.3.1.6 Crown protector. The material used for the crown protector shall be unsupported flexible vinyl sheeting, clear, 0.010 inch minimum thickness, crack resistant at minus 20° F. Testing shall be as specified in 4.4.1.

Source: https://assist.dla.mil ⇕ Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

3.3.1.7 Card holder. The material used for the card holder affixed to the face side of the crown protector shall be a semi-rigid, clear vinyl or cellulose acetate sheeting 0.004 to 0.008 inch in thickness. Testing shall be as specified in 4.4.1.

3.3.1.8 Metal fittings.

3.3.1.8.1 Grommet wire. The grommet wire used to support the cap crown shall be made of first quality spring steel completely coated with white ethyl cellulose, cellulose propionate or cellulose acetate propionate coating. The steel wire shall be cut to the required length (see Table I, op.13a) and shall finish 5/16 (± 1/32) inch in width and 0.020 inch (± 0.005) in thickness. Testing shall be as specified in 4.4.1.

3.3.1.8.2 Clamp. The adjustment clamp clinched to one end of the steel grommet wire shall be made of the following materials:

Base and clamp - Carbon steel AISI 1020, hardness Rockwell B scale 66, thickness 0.031 (± 0.002) inch.
Slug - Carbon steel AISI 1015/1020, hardness Rockwell B scale 90, thickness 0.015 (± 0.002) inch.
Assembled clamp - Electroplated with zinc 0.00005 inch minimum thickness, chrome plated finish.

The clamp assembly shall be approximately 1 inch long and its design shall conform in principle to Figure 3. The width of the base component shall be sufficient to accommodate the width of the grommet wire. Testing shall be performed as specified in 4.4.1.

3.3.1.8.3 Staples. The staples shall be stamped from a heavy duty corrosion resistant flat steel wire, 0.0250 (± 0.0005) inch in thickness, and shall be of sufficient length to thoroughly secure the applicable component parts and leave a smooth flat clinch without any distortion of the materials. The staples shall have a corrosion resistant finish, and shall show no evidence of corrosion when tested as specified in 4.4.1.

3.3.1.9 Buttons. The buttons used for the cap frame shall be 22-1/2 ligne conforming to type II, style 5, class A, of MIL-B-3461, except that the length of the screw tube shall be 3/8 (± 1/64) inch.

3.3.1.10 Chin strap. The chin strap for the cap frame shall conform to the style of type III, class 1 of MIL-S-17615, except it shall be a strip of single ply plumper material specified in 3.3.1.1.2 and be heat set with rolled edges 1/16 inch from each side.

3.3.2 Cap cover.

3.3.2.1 Cloth, polyester/cotton twill. The basic fabric for the crown and flare pieces of the cap cover shall be a polyester/cotton twill, shade white 3053, conforming to MIL-C-24927.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

3.3.2.2 Webbing. The webbing for the band on the cap cover shall be a polyester knit type with a horizontal weave, a finished width of 1-5/8 (± 1/16) inches, a weight of 0.72 to 0.97 oz/lin. yard with a 0.047 to 0.057 inches of thickness, and elongation of 83 percent to 100 percent. The color shall be Blue Shade 3362. Testing shall be as specified in 4.4.1.

3.3.2.2.1 Colorfastness. The webbing shall show a minimum of "good" fastness to light (20 hours), laundering, and perspiration. Crocking shall show a minimum of 4.

3.3.2.3 Stay. The stay for the cap cover shall be made from polyethylene terephthalate plastic sheet conforming to MIL-P-55010, except the thickness shall be 0.009 (± 0.0015) inch, the color shall be natural (clear or opaque) and the transparency and optical properties shall not apply. The stay shall measure 1/2 inch wide and 4 inches in length when tested as specified in 4.4.1. Both ends shall be round.

* 3.3.2.4 Tape. The reinforcement tape for the cap cover shall conform to type II, III, or IV, class 1 or 2, of A-A-52067. The color of the tape shall be white to approximate the shade of the outer fabrics, and shall be cut to finish 1/2 inch in width.

3.3.3 Mount and band.

3.3.3.1 Band, webbing. The webbing used for the band on the mounts shall conform to the webbing as specified in 3.3.2.2 and shall be sufficiently sized to fit snugly over cap cover according to Table III.

3.3.3.2 Mount. The mount which is placed over the cap cover, shall be constructed of the materials specified below and in accordance with Table III. The finished design and dimensions of the metal insignia mounts shall be as shown in Figure 6.

3.3.3.2.1 Cloth, polyester/wool serge. The cloth used for the background on the metal insignia mounts shall conform to type III, class 3 of MIL-C-823. The color shall be Blue 3362. The piece number for the standard sample is 80353.

3.3.3.2.2 Stay material. The stay material used in the construction of metal insignia mounts, shall be of a flexible paperboard which has been impregnated with a minimum of 15 percent inert mineral filler. The paperboard shall be made of a cellulosic fiber, and shall finish with a thickness of 0.025 (± 0.001) inch and weight 110.0 (± 5 percent) pounds per 1,000 square feet. The color shall be black. Testing shall be performed as specified in 4.4.1.

3.3.3.2.3 Leatherette. The leatherette used to back the metal insignia mounts, shall be either of a fabric or paper base conforming to the requirements specified in 3.3.3.2.3.1 and 3.3.3.2.3.2.

Source: https://assist.dla.mil Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

3.3.3.2.3.1 Fabric base. The leatherette shall be made of any suitable woven or knitted cotton material, vinyl coated and embossed with a simulated leather effect on one side only. The fabric shall have a finished weight of not less than 14 ounces per square yard, and shall show a minimum of "good" fastness to crocking and water. Testing shall be performed as specified in 4.4.1.

3.3.3.2.3.2 Paper base. The leatherette shall consist of a polyvinyl chloride film bonded or laminated to a latex impregnated (30-35 percent by weight) cellulose pulpboard sheet with a suitable adhesive. The polyvinyl chloride film shall be black in color, embossed on one side only, with a finished thickness of 0.009 (± 0.0005) inches. In addition, the polyvinyl chloride film shall show a minimum of "good" fastness to crocking and water. The latex impregnated pulpboard sheet, shall have a finished thickness of 0.030 (± 0.0015) inches. Testing shall be performed as specified in 4.4.1.

3.3.4 Thread.

3.3.4.1 Thread, nylon. The nylon thread for seaming and stitching the sweatband assembly to the cap frame shall conform to class A, type I, II or III, size E or type IV, size C of V-T-295. The thread shall be dyed black or brown to approximate the shade of the sweatband and shall show good colorfastness to wet-dry cleaning and perspiration. The nylon thread for seaming and stitching the band assembly to the flare of the cap cover and the reinforcement tape used for the crown piece of the cap cover shall conform to type I, class A, size B, or type II, class A, size B of V-T-295. The thread shall be white or neutral in color.

3.3.4.2 Thread, cotton. The cotton thread used for seaming and stitching all parts of the cap frame and cap cover, except as specified in 3.3.4.1, shall conform to A-A-52094 in the following sizes:

	Type	Ticket No.	Ply
Cap frame	I II III	30 24 A, 00	3 4 3
Cap cover	III	00,000	3
Mount and band	III	00	3

* 3.3.4.3 Thread, polyester core. As an alternate to the cotton thread, a polyester core thread conforming to ticket No. 50, 2-ply of A-A-50199 may be substituted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

3.3.4.4 Color. The color of the thread used for the cap frame shall be dyed black, brown, or Coast Guard Blue AT, cable #66060 to match the material to which it is sewn. The color of the thread used for the crown and flare pieces of the cap cover shall be bleached white. The color of the thread used for the mount and band shall be Blue AT, cable #66060 Coast Guard.

* 3.3.4.5 Colorfastness. The dyed thread shall show fastness to light, laundering, perspiration, and wet-dry cleaning equal to or better than the standard sample when tested as specified in A-A-52094 or A-A-50199 as applicable. When a standard sample is not available, the dyed thread shall show a minimum of "good" fastness to light, laundering, perspiration, and wet-dry cleaning when tested as specified in A-A-52094 or A-A-50199, as applicable.

3.3.5 Labels.

3.3.5.1 Frame. Each cap frame shall have a combination identification-size label, a separate size label, and an instruction label conforming to the requirements specified in 3.3.5.1.1, 3.3.5.1.2, and 3.3.5.1.3.

* 3.3.5.1.1 Identification-size label. The combination identification and size label for the cap frame shall conform to type VI, class 4 of DDD-L-20; except that the label shall bear the following inscription:

CAP FRAME, COMBINATION MAN'S (CG)
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
STOCK NO: 8405-00-000-0000 (EXAMPLE)
SIZE: 7 (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (If other than contractor)

3.3.5.1.2 Size label, stamped or paper. The stamped size label for the cap frame shall conform to type IV, class 2, of DDD-L-20; except that only the size shall be designated and shall show fastness to dry cleaning only. The paper label shall be of a pressure-sensitive adhesive type, with the size number printed in black with numerals not less than 5/16 inch in height.

3.3.5.1.3 Special instruction label. A special instruction label shall be packaged with the cap frame as specified in 5.1.1. The label shall measure not less than 2 inches by 3 inches. The text shall be printed on one side only, in letters not less than 3/32 inch in height. Inscription shall be as follows:

SPECIAL INSTRUCTIONS

IF THE CIRCUMFERENCE OF THE FRAME WIRE REQUIRES ADJUSTMENT TO FIT THE CAP COVER, THE CLAMP SHALL BE LOOSENED AND RE-SECURED TO THE PROPER SIZE

Source: https://assist.dla.mil - Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

* 3.3.5.2 Cap cover. Each cap cover shall have a combination identification and size label conforming to type VI, class 4, of DDD-L-20; except that the label shall bear the following inscription:

CAP COVER, COMBINATION MAN'S (CG)
FIBER CONTENT: 65% POLYESTER/ 35% COTTON
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
STOCK NO: 8405-00-000-0000 (EXAMPLE)
SIZE: M (7, 7-1/8, 7-1/4) (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (If other than contractor)

NOTE: Each label shall have an alpha and numerical size.

3.3.5.3 Box. Each box shall have an identification label conforming to type III or IV, class 1 of DDD-L-20; except the label shall bear the following inscription:

CAP COVER, COMBINATION MAN'S (CG)
STOCK NO: 8405-00-000-0000 (EXAMPLE)
SIZE: 7 (EXAMPLE)

As an alternate, an ink stamp may be used with the same inscription.

3.4 Design.

3.4.1 Cap frame. The cap frame shall have a circular inner headband, with crescent shaped embroidered cloth or porameric top visor centered at the front of the frame and a molded plastic front stand. A circular adjustable steel wire with attached vinyl crown protector is to be used to support the cap cover. Each cap frame shall have a chin strap attached to the cap with two insignia buttons inserted through lower sides of the headband into their respective screw tubes. Each screw tube shall be securely attached with a staple. The cap frame shall be so constructed that a removable cap cover of corresponding size may fit snugly over it.

3.4.2 Cap cover. The cap cover shall consist of a circular top piece, flared sides, and a band made of elastic webbing. One horizontal buttonhole shall be placed on each side of the band to correspond to the screw tubes on the cap frame (see Figure 5).

3.4.3 Mount and band. The mount shall consist of an impregnated paperboard stay inserted between an applicable background cloth and leatherette material. The background cloth shall cover the entire face and curved edge of the mount. The leatherette shall cover the entire back of the mount. The mount shall have perforations to correspond with the screw posts of the applicable metal insignia. The band shall consist of a 1-5/8 inch wide webbing, with one horizontal buttonhole on each side to correspond to the screw tubes on the cap frame and be sufficiently sized to fit over the cap cover.

Source: https://assist.dla.mil Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

3.5 Figures. Figures 1 thru 6 are furnish for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

* 3.6 Patterns. The patterns for cutting all parts of the cap frame shall be furnished by the contractor, and shall be of the proper proportions to provide good fitting cap frames conforming to the finished dimensions in Table I. Standard patterns for the cap cover will be furnished by the Government to the contractor for use in cutting his work patterns. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the appearance, serviceability, or dimensional requirements cited in the specification. The Government patterns allow 1/4 inch for seam allowances, except where otherwise specified in Table II.

3.6.1 Pattern parts. The component parts of the cap cover shall be cut from materials as specified and in accordance with the following pattern parts:

Material	Nomenclature of pattern parts	Cut parts
Cloth, polyester/cotton twill	Crown Half flare (front) Quarter flare (back)	1 1 2

3.7 Construction.

3.7.1 Stitches, seams, and stitching. Stitch, seam and stitching types specified in Table I, II, and III shall conform to FED-STD-751. Whenever two or more methods for seams, or stitches are given for the same operation, any one of them may be used. Where stitch type 101 or 401 is used, the chain or looper (underthread) shall be on the inside of the cap frame or cap cover. Unless otherwise specified, topstitching and edge stitching on cap cover shall be 1/16 inch from the edge.

3.7.2 Stitches per inch. The maximum number of stitches per inch shall be as specified in Tables I, II, and III.

Source: https://assist.dla.mil - Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

3.7 3 Thread breaks and ends of seams. Unless otherwise specified in Tables I, II, and III, ends of all seams and stitching, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by starting the repair stitch not less than 1/2 inch in front of break. Stitch lines used on the circular sections of the cap frame must overlap 3/8 to 5/8 inch beyond the starting point or if necessary backstitched to prevent raveling. Skipped stitches or 401 stitch type thread breaks may be repaired by using 301 stitch type. Where stitch type 401 or 101 is permitted as an option, it shall not be used unless the ends are caught in other seams or stitching.

* 3.8 Manufacturing operations requirements. The cap frame, cap cover, and mount and band shall be manufactured in accordance with operation requirements specified in Tables I, II, and III. The contractor is not required to follow the exact sequence of operations, provided the furnish items are identical to those produced by following the exact sequence as shown. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the appearance, serviceability, or dimensional requirements cited in the specification.

3.8.1 Pressing. All pressing operations referenced in Table II shall be performed by using a heated pressing iron or steam pressing machine.

3.8.2 Shade and size marking. The component parts of the cap covers shall be marked to insure a uniform shade and size throughout the cap cover. Any method may be used except:

(1) Corrosive metal fastening devices
(2) Sew-on shade tickets
(3) Adhesive type tickets which discolor or adhere to the material upon removal of tickets

3.9 Abbreviations in table of operations. The abbreviations used in Tables I, II, and III are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table I.
Construction of Cap Frames.

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREA NDL LPR
1.	Cutting. a. Cut the component parts of the cap frame in strict accordance with the contractor's patterns. b. Cut the polyester/wool serge for the welt strip around the bottom of the inner band 2 (± 1/8) inches in width (see 3.3.1.3.3). c. Cut the material for the crown protector piece approximately 4-1/2 inches in width at the center, then tapering the sides down to approximately 1-1/2 inches wide at each end. These crown protectors will vary in length, depending on cap size, so that they will not sag excessively in the finished cap (see 3.3.1.6 and Figure 1). d. Cut the vinyl film for the sweatband welt 3/4 (± 1/16) inch in width (see 3.3.1.5). e. Cut the plastic sheeting (cellulose acetate or vinyl) for the card holder into strips approximately 2 inches in length by 3 inches in width (see 3.3.1.7). f. Cut the grommet wire to the lengths specified in operation 13a (see 3.3.1.8.1). g. Cut a piece of white vinyl coated fabric (see 3.3.1.2.3) for binding the top edge of front stand 1-1/2 to 2 inches wide by 6-1/2 to 7-1/2 inches long.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table I.
Construction of Cap Frames. (Cont'd)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL BOB LPR
2. *	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in Section 4 shall be removed from production and replaced with non-defective and properly matched components.				
3.	Make visor. The finished visor shall be as shown in Figure 2. a. The type I visor shall be constructed as follows: 1. Top piece. Laminate the wool broadcloth or melton (see 3.3.1.1.1) to the reinforcement piece of the cloth, cotton twill (see 3.3.1.1.3) face side up with the adhesive specified in 3.3.1.1.7. To the wool broadcloth or melton, stitch a gold metallic appliqué (see 3.3.1.1.8 and Figure 2).	Embroidered			
	2. Assembly. Laminate the embroidered top piece to the leather bottom piece with the adhesive specified in 3.3.1.1.7. Skive the assembled components 1/4 (± 1/16) inch along the inside end from tip to tip. b. The type II visor shall be constructed as follows: 1. Top piece. Laminate the plastic porameric material (see 3.3.1.1.2) to the plumper paper (see 3.3.1.1.4) with the adhesive specified in 3.3.1.1.7.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table I.
Construction of Cap Frames. (Cont'd)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL LPR	THREAD BOB LPR
	2. Assembly. Laminate the top piece to the leather bottom piece with the adhesive specified in 3.3.1.1.7. Skive the assembled components 1/4 (± 1/16) inch along the inside end from tip to tip, from top side of visor.					
	c. For types I and II visors, stitch the visor binding (see 3.3.1.1.6) using black thread, around the outside edge 1/16 inch from the turned edge of binding on top of visor, and catching the other edge in the stitching on the bottom of the visor. The binding shall finish on the top of the visor 3/16 to 1/4 inch.	301	BSb-1	7-8	A/3	A/3
	d. The finished visors for types I and II cap frames shall be properly molded with heat into a uniform crescent shape, and shall be of one size only with dimensions as follows:					
	1. Overall width of visor, before assembly, at center, 2-5/8 (± 1/8) inches.					
	2. Depth of arc, at center of backedge, 2-7/8 (± 1/8) inches.					
	3. Width of visor, after assembly, at center from front edge to lower edge of band, 2-1/4 (± 1/4) inches.					
	4. Distance from left tip to right tip of visor before assembly, when spread flat shall be 8 (± 1/8) inches.					
	5. Distance from left tip to right tip after assembly, at lower edge of headband, shall be 11 (± 1/4) inches.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table I.
Construction of Cap Frames. (Cont'd)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB LPR
4.	Inner band. a. Overlap both ends of the high density polyethylene or the imitation (molded) polyethylene inner band whichever is applicable, 1 (± 1/8) inch and with the top and bottom edges even, stitch overlapped ends of inner band from top to bottom catching the inside end of inner band 1/8 (± 1/16) inch from the edge. As an alternate overlap both ends of the applicable inner band 1 (± 1/8) inch and secure with two staples. The first one approximately 3/8 inch down from top edge, the second one approximately 3/4 inch down from top edge, each catching both plies of the inner band. The two staples shall be horizontally positioned and secured thru the solid (unperforated) area of the overlapped inner band. The flat head side of the staple shall be on the outside of inner band. b. The overlapped ends of the inner band shall be positioned 2 (± 1/4) inches to the left or right of center back. c. The imitation (molded) inner band, when applicable and patterned on one side only, shall finish with the pattern side on the outside.					
5.	Crown protector. a. Fold one end of the crown protector on itself, back to back, and stitch or heat seal 5/8 to 3/4 inch from the folded edge forming a loop. Each end of stitch line shall be backtacked. A double row of stitching may be used in place of backstitching.	101 or 301 or 401	EFa-1	8-10	A/3 A/3 A/3	 A/3 A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table I.
Construction of Cap Frames. (Cont'd)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB LPR
	b. Position and center a 2 inch by 3 inch plastic card holder piece on the face side of the crown protector. Stitch or heat seal across the width and one side of the card holder forming as approximate 1-3/4 inch open pocket on one side. The pocket opening may face towards either side of the cap frame.	101 or 301 or 401			A/3 A/3 A/3	 A/3 A/3
6.	Prepare and attach front stand. a. Using a 1-1/2 to 2 inch wide by 6-1/2 to 7-1/2 inch long piece of white vinyl coated fabric cut in operation 1.g., bind the entire top edge of the molded front stand forming a 3/8 to 5/8 inch wide tunnel for inserting the grommet wire. The front free end of the crown protector piece shall be simultaneously folded over and caught in the stitching during this operation. As an alternate, the front free end of the crown protector piece may be folded over and stapled to the front stand. b. Center the prepared molded front stand on the face side of the inner band, with the top center edge of the front stand positioned 2-1/4 to 2-1/2 inches above top edge of inner band. Secure bottom portion of the front stand to the inner band with six 1/2 inch wide staples properly positioned for maximum holding power. If alternate one piece molded stay is used, secure front stand to the inner band with four 1/2 inch wide staples properly positioned for maximum holding power. Staples of sufficient length shall be clinched horizontal to the inner band margins and shall finish smooth and flat on the back-side of the inner band. Staple a support piece (see 3.3.1.2.1.3) over the bottom portion of the front stand (see Figure 1).	301 or 401	BSc-1	8-10	24/4 24/4	A/3 or 30/3 A/3 or 30/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table I.
Construction of Cap Frames. (Cont'd)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB LPR
	or As an alternate, a combination of stapling and stitching may be used to attach lower portion of front-stand to inner band. c. The molded plastic front stand, before attachment to the frame, shall measure 6-1/2 (± 1/4) inches in width along top edge, 3-3/4 to 4-1/2 inches in width along bottom edge, and 3-3/8 to 3-1/2 inches in height at center front. or If alternate one piece molded stay is used, it may measure 6-1/2 (± 1/4) inches in width along top edge, 7-1/2 (± 1/4) inches in width along bottom edge, and 3-3/4 to 4 inches in height at center front.					
7.	Make welt strip. a. Overedge stitch the entire top of the 2 inch wide polyester/wool welt strip.	503 or 504 or 602	EFd-1	7-10	00/3	00/3
	b. Join ends of welt strip 1/4 to 3/8 inch from welt edge, backtacking the ends of stitching. As an alternate to backtacking; two rows of super-imposed stitching may be used. c. Press seam open. d. With the welt strip laid flat and seam face up, place a mark to indicate the center front. e. Turn the welt strip so that the seam is on the inside.	101 or 301 or 401	SSa-1	12-14	A/3 A/3 A/3	 A/3 A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table I.
Construction of Cap Frames. (Cont'd)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB LPR
	f. Fold the welt strip lengthwise with the raw edge extending 1/2 (± 1/16) inch beyond the overedged edge. The width of the overedge portion shall be 3/4 (± 1/8) inch.					
	g. Form a permanent welt edge (sharp fold or tuck) in the lengthwise direction of the welt strip by stitching 1/16 inch from the foldline. The raised welt edge shall start on one side of the cap frame, approximately 5 inches back from front center of frame, continuing around the back of frame to the same position on the opposite side of frame.	101 or 301 or 401	OSe-1	12-14	A/3 A/3	 A/3
8.	Attach welt strip to inner band. a. Position the prepared welt strip over the entire bottom edge of inner band with the welt strip joining seam at center back of inner band, and the raised welt edge of the strip positioned 1/4 to 5/16 inch above the bottom edge of the band on the outside.					
	b. Stitch the welt strip to the entire circumference of the inner band adjacent to the stitchline used to form the raised welt edge. The height of this stitchline shall remain the same when stitching across the front of the frame, where a welt edge is not required.	101 or 301 or 401	BSa-1	8-10	A/3 24/4 24/A	 A/3 or 30/3 A/3 or 30/3
	c. Stitch the top edge of the welt strip to the entire circumference of the inner band at the base of the overedge stitching.	101 or 301 or 401	LSa-1	8-10 (backtacking not required)	A/3 24/4 24/A	 A/3 or 30/3 A/3 or 30/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table I.
Construction of Cap Frames. (Cont'd)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL LPR	THREAD BOB LPR
9.	Attach button screw tube. a. Punch a hole of proper diameter in each side of inner band and welt strip, with the center of hole 1/2 to 5/8 inch from bottom on inner band and 5-1/2 (± 1/8) inches from center of cap frame to center of each hole. b. Insert a button screw tube (see 3.3.1.9) through the button tube hole and secure to the inner headband with one heavy duty staple.					
10.	Attach visor. Position the visor to the inside of inner band at center front and stitch 1/4 (± 1/16) inch from the skived edge of visor and 1/4 (± 1/16) inch from the bottom edge of the inner band.	301 or 401	LSa-1	5-6	24/4 24/4	A/3 or 30/3 A/3 or 30/3
*	Make sweatband. a. The flesh or backside of the sheepskin or artificial leather sweatband shall have a combination identification and size label sewn (see 3.3.5.1.1) approximately 1 inch to the right or left of the center back seam. The top of lettering shall face towards the top edge of sweatband. The inscription shall not be obscured by the welting.					
*	b. Fold the 3/4 inch wide strip of plastic welting in half length-wise. Position the bottom edge of sweatband 1/16 to 3/32 inch from the folded edge of welting. Position the combination label between the back-side of the sweatband and the folded edge of the welting as stated above. Stitch thru all plies.	304	-	7-10	A/3 or 30/3	A/3 or 30/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table I.
Construction of Cap Frames. (Cont'd)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL BOB LPR
	c. Abut the ends of sweatband assembly and join with the seam reinforced with a 5/8 inch wide strip of lightweight coated or uncoated fabric.	304	FSe-1	7-10	A/3 A/3 or or 30/3 30/3
12.	Attach sweatband. a. The back edge of visor shall be flanged upwards and set so as not to rub against the forehead when cap is worn. b. Place the sweatband assembly on the inside of hat frame with folded edge of plastic welting positioned 1/8 to 3/16 inch above the bottom bound edge of inner band. The joining seam of sweatband shall be positioned at center back of frame.				
	c. Stitch sweatband assembly to the inner band with stitching going thru the plastic welting adjacent to the bottom edge of sweatband.	301	-	7-10	A/3 A/3 or o· 30/3 30/3
	d. Secure a size label (see 3.3.5.1.2) on the grain side of the sweatband positioned approximately 1 inch to the left or right of center back seam.				
13.	Attach grommet wire and crown protector.				
*	a. Cut grommet wire (see 3.3.1.8.1) to the following lengths: Size — Length (Inches) 6-1/2 thru 6-7/8 — 34-1/8 7 thru 7-1/4 — 35-1/4 7-3/8 thru 7-5/8 — 36-3/8 7-3/4 thru 8 — 37-1/2 Tolerance — ± 1/8 inch				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table I.
Construction of Cap Frames. (Cont'd)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL BOB LPR
	b. Clinch the adjustable steel clamp (see 3.3.1.8.2) to one end of the cut size (length) of grommet wire.				
*	c. Center and attach the properly sized length of grommet wire to top center of molded plastic front stand by threading free end of wire thru binding, crown protector loop, and adjustment clamp at other end of wire. Overlap the wire ends a minimum of one inch and clinch the clamp.				
14.	Assemble chin strap. a. The finished length of the top and bottom slide shall be 9-1/2 (± 1/4) inch. The width of the loops shall be the same as the width of the chin strap.				
	b. Pierce a 7/32 (± 1/64) inch diameter hole at end of slide, 3/8 (± 1/16) inch from end to centerline of hole.				
	c. For top slide: position and rivet one loop to the top slide 1/4 (± 1/16) inch from square end to center of rivet. Close loop with two staples.				
	d. For bottom slide: position and staple closed one loop to the bottom slide 1/4 (± 1/16) inch from end.				
	e. Insert the top slide thru the bottom slide loop and the bottom slide thru the top slide loop.				
15.	Cleaning. a. Trim ends of stitching and remove all loose thread.				
	b. Remove all spots and stains.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table II.
Construction of Cap Covers.

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL BOB LPR
1.	Cutting. a. The component parts of the cap cover shall be cut in strict accordance with the Government furnished pattern which show size, shape, direction lines for cutting, and notches for proper assembly of the component parts. b. All component parts shall be cut from one piece of the applicable basic cloth (see 3.3.2.1). c. Cut webbing (see 3.3.2.2) in the following lengths: Size — Length (inches) 6-1/2, 6-5/8, — 22 6-3/4, 6-7/8 — 22 7, 7-1/8, 7-1/4 — 23-1/2 7-3/8, 7-1/2, 7-5/8 — 24-1/2 7-3/4, 7-7/8, 8 — 25-1/2 Tolerance — ± 1/8				
2.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in Section 4 shall be removed from production and replaced with nondefective and properly matched components.				
3.	Shade and size marking (see 3.8.2). a. All component parts shall be marked or ticketed to insure uniform shade and size throughout the cap cover. b. The use of a rubber stamp or pencil is acceptable, provided the numbers are legible and do not show through on the outside of the cap cover.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table II.
Construction of Cap Covers. (Cont'd)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL LPR	THREAD BOB LPR
4.	Make band.					
	a. Join ends of webbing face to face, and stitch 1/4 (± 1/16) inch from the raw edge.	301	LSq-2 (a)	8-10	00	00
	b. Fold seams to one side and stitch 1/8 (± 1/16) inch from seam.	301	LSq-2 (b)	10-14	00	00
*	c. Make a horizontal buttonhole in webbing on each side of cap crown, positioned 5-1/2 (± 1/8) inches from the center front to center of button-hole. The buttonhole shall be straight style 3/4 (± 1/16) inch in length, and positioned 3/8 to 1/4 inch from the bottom edge of webbing to center of buttonhole. The ends of each buttonhole shall be securely tacked.	Button -hole		33-35 per butto n -hole	00	00 or none
-.	Make flare.					
	a. Join the ends of the three pieces of flare basic material face to face, and stitch 1/4 (± 1/16) inch from the raw edge. Spread each seam open and press flat.	301 or 401	SSz-3 (a)	10-14	00 00	00 000
	b. Double stitch each seam 3/16 to 1/4 inch gauge with the seam centered between the two rows of stitching.	301 or 401	SSz-3 (b)	10-14	00 00	00 000
6.	Join flare to crown piece.					
	a. Join flare assembly to crown piece face to face, and stitch 1/4 (± 1/16) inch from the raw edge. Spread seam open and press flat, with the flare seams centered at each side and at center back.	301 or 401	SSa-1	10-14	00 00	00 000
	b. Position and center the bias cut reinforcement tape (see 3.3.2.4) over the entire length of the flare/crown piece joining seam. The raw edges of the tape may be turned under. Turn under the end of tape 1/4 to 1/2 inch and double stitch 3/16 to 1/4 inch gauge with the seam centered	301 or 401	SSad-3 (b)	10-14	B B	B B

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table II.
Construction of Cap Covers. (Cont'd)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB LPR
	between the two rows of stitching, thru all plies finishing at center back, overlapping the tape not less than 1-1/2 inches.					
	c. The reinforcement tape shall finish 1/2 (± 1/16) inch in width.					
7.	Join webbing to flare.					
	a. Join the top edge of webbing to flare, face to face, and stitch 1/4 (± 1/16) inch from the raw edge.	301 or 401	SSa-1	10-14	B B	B B
	b. Overedge seam allowances together.	503 or 504 or 602	SSa-1	8-10	B B	B B
	OR					
	c. Operations "a" and "b" may be performed in one operation by simultaneously stitching and overedging.	515 or 516 or 517 or 518	SSa-2	8-10	B B B B	B B B B
	NOTE: When a serging machine is used the gauge shall be set so that the edge of the fabric and webbing is not cut off.					
	d. Superimpose the label (see 3.3.5.2) on the side rear of the webbing so as not to interfere with the side buttonhole and stitch 1/8 (± 1/16) inch from the overedge edge through all plies.	301	SSab-1	8-10	00	00
	e. As an option, a stay (see 3.3.2.3) may be superimposed approximately over the center front of the webbing. Stitch 1/8 (± 1/16) inch from the overedged edge through all plies.	301	SSab-1	8-10	00	00
	f. The flare shall finish 2-3/4 (± 1/8) inches in width at center of front and 2 (± 1/8) inches in width at center of back.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table II.
Construction of Cap Covers. (Cont'd)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL BOB LPR
	g. The band shall finish approximately 1-3/8 (± 1/16) inches in width.				
9.	Finishing and blocking. a. Trim ends of stitching and remove all loose thread. b. Remove all spots, stains, and shade tickets. c. Each cap cover shall be securely positioned over the properly sized five piece wooden block furnished by the contractor. d. Insert each blocked cap cover into a heated steam oven for approximately 5 minutes, with the temperature of the oven properly controlled. e. Remove the cap covers from the blocks and place on a suitable rack or equivalent to thoroughly air dry. NOTE: The contractor may press the blocked cap cover before or after removal from the heated steam oven to assure a wrinkle free cap cover (see 3.8.1).				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table III.
Construction of Mount and Band.

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB LPR
1.	Make insignia mount. a. Cut the paperboard stay and leatherette materials to shape according to measurements in Figure 6. Cut the polyester/ wool serge for the mount according to measurements in Figure 6, adding sufficient fabric to turn over in accordance with operation 1b. b. Cement the impregnated paper board stay to the polyester/wool serge. Turn the edge of the cloth approximately 1/4 inch over the edge of the curved portion of the stay and cement the cloth edges down, forming a finished folded edge. c. The polyester/wool serge shall not be folded over the straight cut edges of the stay piece. d. Cement the leatherette piece to the back side of the cloth covered stay piece with a suitable adhesive.					
*	e. Topstitch outer curved edge of the cloth covered mount approximately 1/16 inch from the folded edge, extending stitching straight down to bottom of mount (see Figure 6).	301	SSa-1	12-14	00	00
	As an alternate, an automatic stitching machine may be used to topstitch outer curved/folded edge rectangular base of the mount approximately 1/16 inch from all edges.	301	SSa-1	8-10		A3
	f. Perforations shall be made in the mount to correspond with the screw posts of the applicable metal insignia. For the enlisted mount, the perforation shall be 1/8 (± .05) inch in diameter and centered 1-1/8 (± 1/16) inch from the top finished edge and 1-3/16 (± 1/32) inch from					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table III.
Construction of Mount and Band. (Cont'd)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB LPR
	the side finished edge according to measurements in Figure 6. For the officers mount, the perforations shall be 1/8 (± .05) inch in diameter. The top perforation shall be centered 5/16 (± 1/16) inch from the top finished edge, the lower perforation shall be centered 7/8 (± 1/16) inch below the top perforation according to the measurements in Figure 6.					
2.	Make band. a. Cut webbing for band according to size needed to fit snugly over the cap cover (see 3.3.3.1).					
	b. Center mount on band. Stitch around base of mount 1/16 to 1/8 inch from edge forming a rectangle and overlapping the topstitching formed in operation 1-e (see Figure 6).	301	LSd-1	12-14	00	00
	c. Join ends of webbing face to face, and stitch 1/4 (± 1/16) inch from the raw edge. Spread seam open and press flat.	301	SSz-3 (a)	12-14	00	00
	d. Double stitch the seam 3/16 to 1/4 inch gauge with the seam centered between the two rows of stitching.	301	SSz-3 (b)	12-14	00	00
*	e. Make a horizontal buttonhole in webbing on each side of band, positioned 5-1/2 (± 1/8) inches from the center front to center of buttonhole. The buttonhole shall be straight style 3/4 (± 1/16) inch in length, and positioned 3/8 to 1/4 inch from the bottom edge of webbing to center of buttonhole shall be securely tacked. NOTE: Prior to inspection, fully assemble service cap as follows:	Button -hole		33-35 per button-hole inclu-ding tack	00	00 or None

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table III.
Construction of Mount and Band. (Cont'd)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL BOB LPR
	- Place a thoroughly air dried cap cover over finished cap frame. Care should be taken to align cap cover buttonholes over screw tubes. - Place mount and band over cap cover and cap frame. Care should be taken to align band buttonholes over screw tubes. - Assemble the completed top and bottom sections of the chin straps to engage on the button screw tubes and snugly fit the headband. Screw the buttons into the tubes the entire length of the screw.				

3.10 Sizes and measurements. The sizes and measurements of the finished cap frame and finished cap covers shall conform to the measurements as shown in Table IV. The measurements and tolerances shall be expressed in inches.

Table IV
Sizes and finished measurements

Cap Frame Size	Cap Head Circumference 1/	Cap Band Circumference 2/
6-1/2	20-1/2	21-1/2
6-5/8	20-7/8	21-1/2
6-3/4	21-1/4	21-1/2
6-7/8	21-5/8	21-1/2
7	22	23
7-1/8	22-3/8	23
7-1/4	22-3/4	23
7-3/8	23-1/8	24
7-1/2	23-1/2	24
7-5/8	23-7/8	24
7-3/4	24-1/4	25
7-7/8	24-5/8	25
8	25	25
Tolerance:	+ 1/8 - 1/4	± 1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

1/ The head circumference shall be taken around the inside bottom edge of the sweatband with an expandable type hat gauge.

2/ The band circumference shall be measured by folding the band along center back seam to center front of band, measuring from folded edge to folded edge, and multiplying the result by two.

3.11 Workmanship. The finished cap frames, cap covers, and mount and bands shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of Section 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2, shall be inspected as specified in 4.4.3.1 and 4.4.3.2 for compliance with design, construction, workmanship and dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection. Sampling for inspection of the cap frame, cap cover, mount and band shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and material shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition, testing shall be performed on the components specified in Table VI in accordance with FED-STD-191 or UU-P-31, which ever is applicable, and as specified herein. The lot shall be unacceptable if one or more units fail to meet any test requirements specified. The lot and sample size for cap frame shall be in accordance with Table V. The units for expressing the lot sizes for cap frame shall be as indicated in Table V.

Table V Sample size

Lot size	Sample size
800 or less	2
801 thru 22,000	3
22,001 and over	5

Table VI Component tests

Component and lot size expressed in terms of	Characteristic	Requirement paragraph	Test metho
Plastic, visor top and chin strap	Material ident	3.3.1.1.2	1/
	Finish	3.3.1.1.2	1/
	Thickness	3.3.1.1.2	1/
	Color	3.3.1.1.2	1/
	Weight	3.3.1.1.2	1/
Cloth, cotton twill, visor (yards)	Material ident	3.3.1.1.3	1/
	Yarns per inch	3.3.1.1.3	1/
	Weight	3.3.1.1.3	1/
	Nonfibrous material	3.3.1.1.3	1/
Plumper paper, visor (yards)	Material ident	3.3.1.1.4	1/
	Thickness	3.3.1.1.4	1/
	Immersion test	3.3.1.1.4	4.4.2.1
Leather, visor (pieces	Material	3.3.1.1.5	1/
	Finish	3.3.1.1.5	1/
	Color	3.3.1.1.5	1/
	Thickness	3.3.1.1.5	1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

Table VI
Component tests

Component and lot size expressed in terms of	Characteristic	Requirement paragraph	Test method
Plastic visor, binding (feet)	Thickness	3.3.1.1.6	1/
	Weight	3.3.1.1.6	1/
	Color	3.3.1.1.6	1/
	Finish	3.3.1.1.6	1/
Adhesive	Type	3.3.1.1.7	1/
	Water resistant	3.3.1.1.7	1/
Twin wire tape stiffener, front stand	Material ident	3.3.1.2.1.1	1/
	Thickness	3.3.1.2.1.1	1/
	Width	3.3.1.2.1.1	1/
Vinyl or polyvinyl chloride stiffener front stand	Material ident	3.3.1.2.1.2	1/
	Color	3.3.1.2.1.2	1/
	Thickness	3.3.1.2.1.2	1/
Paperboard support piece, front stand	Material ident	3.3.1.2.1.3	1/
	Width & length	3.3.1.2.1.3	1/
	Thickness	3.3.1.2.1.3	1/
Inner bands, standar and alternate (each)	Width	3.3.1.3.1	1/
	Thickness	3.3.1.3.1	1/
	Stiffness	3.3.1.3.1.1	4.4.2.2
	Bending	3.3.1.3.1.2	4.4.2.3
	Design	3.3.1.3.1 and 3.3.1.3.2	1/ 1/
Sweatband welting (yards)	Material ident	3.3.1.5	
	Thickness	3.3.1.5	1/
	Crack resistance	3.3.1.5	1/
Crown protector (sheets or rolls)	Material ident	3.3.1.6	1/
	Thickness	3.3.1.6	1/
	Crack resistance	3.3.1.6	1/
Card holder (sheets)	Material	3.3.1.7	1/
	Thickness	3.3.1.7	1/
Grommet wire	Material ident	3.3.1.8.1	1/
	Coating ident	3.3.1.8.1	1/
	Width	3.3.1.8.1	1/
	Thickness	3.3.1.8.1	1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

TABLE VI
COMPONENT TESTING

COMPONENT AND LOT SIZE EXPRESSED IN TERMS OF	CHARACTERISTIC	REQUIREMENT PARAGRAPH	TEST METHOD
Clamp (each)	Material ident	3.3.1.8.2	1/
	Length	3.3.1.8.2	1/
Staples (gross)	Material ident	3.3.1.8.3	1/
	Thickness	3.3.1.8.3	1/
	Corrosion resistance	3.3.1.8.3	1/
Webbing, band cap cover and mount	Material ident	3.3.2.2	1/
	Weave type	3.3.2.2	1/
	Width	3.3.2.2	1/
	Weight	3.3.2.2	1/
	Thickness	3.3.2.2	1/
	Width	3.3.2.2	1/
	Weight	3.3.2.2	1/
	Thickness	3.3.2.2	1/
	Elongation	3.3.2.2	ASTM D 2594
	Colorfastness to:		
	Light	3.3.2.2.1	5660 2/
	Laundering	3.3.2.2.1	5614 2/
	Perspiration	3.3.2.2.1	5680 2/
	Crocking	3.3.2.2.1	AATCC 8-1985
Stay, cap cover	Thickness	3.3.2.3	1/
	Length	3.3.2.3	1/
	Width	3.3.2.3	1/
Stay material, impregnated paperboard sheets or sq feet), insignia mount	Material ident	3.3.3.2.2	1/
	Percent filler	3.3.3.2.2	1/
	Thickness	3.3.3.2.2	7173 3/
	Weight	3.3.3.2.2	110 3/
Leatherette fabric base (yards)	Material ident	3.3.3.2.3.1	1/
	Coating ident	3.3.3.2.3.1	1/
	Weight	3.3.3.2.3.1	5041 2/
	Colorfastness to:		
	Crocking	3.3.3.2.3.1	5651 2/
	Water	3.3.3.2.3.1	5630 2/
Paper base (pounds, sheets, or sq. ft.)	Material ident of specified components	3.3.3.2.3.2	1/
	Thickness of polyvinyl chloride film	3.3.3.2.3.2	173 3/

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

TABLE VI
COMPONENT TESTING

COMPONENT AND LOT SIZE EXPRESSED IN TERMS OF	CHARACTERISTIC	REQUIREMENT PARAGRAPH	TEST METHOD
Paperbase - continued	Thickness of latex impregnated pulp board Colorfastness to (polyvinyl chloride film) Crocking Water	3.3.3.2.3.2 3.3.3.2.3.2 3.3.3.2.3.2	173 3/ Method B of 5651 2/ Paragraph 6.2 of 5630 2/

1/ A certificate of compliance shall be submitted for this requirement.

2/ As specified in FED-STD-191.

3/ As specified in UU-P-31.

4.4.2 Tests.

.4.2.1 Immersion test. Two specimens of the plumper paper shall be immersed in tap water at 80° F for 15 minutes and left flat to air dry. The original shape shall be retained when dried.

4.4.2.2 Stiffness test. The inner band material shall be tested for stiffness at room temperature according to FED-STD-311, method 4211, using a span length of 1.0 inch, a moment weight of 1.0 inch-pounds, and measuring the load at 20° on the angular deflection scale. The specimen shall be one inch wide by 4 inches long and it shall be cut from the center part of the band. Three determinations per sample unit.

4.4.2.3 Bending test. The test is run on a four inch long piece of inner band material. Each piece shall be bent across its width at least 180° around a metal test mandrel, a round metal bar measuring 1/8 inch in diameter. Each piece shall be examined for cracks, both while bent and after removing from the test. The test shall be run at 0° F. The specimen shall be straightened to its original position after removal from the mandrel. All samples and the test mandrel shall be kept in a cold box at a temperature of 0° (± 3°) F for not less than four hours before test. The test shall be run in the cold box and the samples and mandrel handled only with heavy gloves so as to prevent warming of the samples during the test. Two determinations per sample unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

4.4.3 Examination of the end item. The defects found during the examination of the fully assembled service cap shall be classified in accordance with 4.4.3.1 and 4.4.3.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.3.3. The lot size shall be expressed in terms of the sample unit. The sample unit shall be the entire contents within one box.

4.4.3.1 Visual examination:

TABLE V.
End item visual defects - (continued)

Defects	Classification Major	Minor A	Minor B
I. MATERIAL DEFECT AND DAMAGE			
a. Fabrics			
1. Hole, cut, tear, burn, mend, or rip:			
(a) More than 1/4 inch	X		
(b) Up to 1/4 inch		X	
2. Needle chew, drill hole, scorched area or open place:			
(a) More than 1/4 inch	X		
(b) Up to 1/4 inch		X	
3. Loose yarn, snagged thread, misweave, coarse yarn, area of no dye penetration, dye streak, missing yarn, broken yarn, thin place, shade bar or woven in waste:			
(a) On outside (longest dimension in any direction):			
(1) Up to 1/4 inch			X
(2) More than 1/4 inch	X		
(b) On inside			X
4. Permanent fold, pleat or crease in cloth (when caught in seaming or stitching) on outside	X		
5. Knot or slub on outside		X	
6. Braid:			
(a) Poorly constructed (i.e., not evenly woven)		X	
(b) Cut or frayed edges, slack or poorly constructed edge		X	
(c) Any broken yarn		X	
b. Leather:			
1. Hole, cut, tear, or crack	X		
2. Any evidence of the leather separating on the grain side		X	
3. Soft, spongy, or flanky		X	
4. Any scar, wrinkle, or scratch		X	
5. Three or more exposed needle holes		X	
6. Three or more exposed vein marks		X	
7. Color not as specified		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

TABLE V.
End item visual defects - (continued)

Defects	Classification Major	Minor A	Minor B
c. Plastic materials:			
1. Hole, cut, tear. or scratch	X		
2. Color not as specified		X	
3. Evidence of separation, blistering, cracking, or flaking		X	
II. CLEANNESS			
a. Any spot, stain, or streak (longest dimension in any direction):			
1. More than 1/4 inch	X		
2. Up to 1/4 inch		X	
b. Any evidence of cement visible on face side of mount	X		
c. Any marking exposed or visible on outside	X		
d. Three or more thread ends on outside not trimmed to 3/8 inch or less			X
e. Three or more loose threads not removed			X
f. Two or more shade or size tickets not removed			X
III. CUTTING			
a. Any component part not cut in accordance with specified pattern, or directional lines on patterns	X		
b. Shaded parts on outside of cap cover varying in shade within a part or between parts	X		
IV. COMPONENT AND ASSEMBLY			
a. Any component part or operation omitted (unless otherwise classified herein)	X		
b. Any component not as specified	X		
c. Any component not assembled as specified	X		
d. Any component part twisted, tight, distorted, pleated, or full (unless otherwise classified herein)		X	
e. Any operation not as specified (unless otherwise classified herein)			X
V. SEAM AND STITCHING			
a. Accuracy of seaming:			
1. Seam puckered (unless otherwise classified herein)		X	
2. Seam irregular, pleated or wavy		X	
3. Part caught in any unrelated operation or stitching		X	
4. End of stitching when not caught in another seam or stitching, backtacked less than 1/4 inch			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

TABLE V.
End item visual defects - (continued)

Defects	Classification Major	Minor A	Minor B
5. End of a continuous line of stitching overlapped less than 1/2 inch			X
6. Thread breaks not secured or repair stitch starts less than 1/2 inch in back of break			X
7. Stitching sewn too close to the edge resulting in damage to material	X		
8. Not specified color thread used on outside			X
b. Gage of stitching and seam allowance:			
1. Edge, top or raise stitching sewn too close to edge resulting in damage to cloth	X		
2. Seam allowance not as specified by 1/16 inch or more (score only when condition exists on more than 1/2 the length of the seam)			X
3. Irregular or not within range specified or varies more than 1/16 inch when no range is specified (score only when condition exists on more than 1/2 the length of the seam			X
c. Open seams:			
1. On frame:			
(a) More than 1/4 inch	X		
(b) Up to 1/4 inch, inclusive		X	
2. On cap cover:			
(a) More than 3/4 inch	X		
(b) More than 3/8 inch up to 3/4 inch, inclusive		X	
(c) Up to 3/8 inch, inclusive			X
3. On mount and band:			
(a) More than 1/2 inch	X		
(b) Up to 1/2 inch, inclusive		X	
NOTE: The seam shall be classified open when one or more stitches joining a seam are broken or when two or more continuous skipped or runoff stitches occur.			
d. Raw edge:			
1. On outside:			
(a) Up to 3/8 inch, inclusive			X
(b) More than 3/8 inch up to 3/4 inch, inclusive		X	
(c) More than 3/4 inch	X		
2. On inside:			
(a) 1/4 inch up to 1-3/4 inches, inclusive			X
(b) More than 1-3/4 inches		X	
e. Seam and stitch type:			
1. Not specified seam or stitch type	X		
2. Any line of stitching omitted or insecure		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

TABLE V.
End item visual defects - (continued)

Defects	Classification Major	Minor A	Minor B
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)			X
4. Looper thread 401 stitch type on outside	X		
5. Stitches per inch in mount construction not as specified		X	
6. Stitches per inch on frame or cap cover (score only when condition exists on more than 1/2 the length of seam):			
(a) More than the maximum specified		X	
(b) Less than the minimum specified			X
f. Stitch tension:			
1. Loose tension resulting in a loose seam	X		
2. Loosely exposed loops of lower or top thread		X	
3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X		
4. Tight tension of mount or band attachment, as evident by puckering or distortions	X	X	
g. Overedge stitching:			
Omitted for 1 or more inches on one or more seams		X	
VI. MOLDED FRONT STAND:			
a. Offset from front center of cap frame			
1. Up through 1/4 inch		X	
2. More than 1/4 inch	X		
b. Top center edge less than 2-1/4 or more than 2-1/2 inches from top edge of inner band	X		
c. Number of staples not as required attaching stand to inner band		X	
d. Stand set on an angle, affecting appearance	X		
e. Staples not positioned for maximum holding power		X	
f. Staples not clinched smooth and flat		X	
g. Width across top edge of stand less than 6 or more than 6-1/2 inches		X	
h. Width of front stand at top edge of inner band less than 5 inches		X	
i. Height of full stand at center front less than 3-3/8 or more than 4 inches		X	
VII. GROMMET WIRE			
a. Clamp not securely clinched to wire		X	
b. Wire not cut to specified length	X		
c. Wire overlapped less than 1 inch		X	
d. Clamp does not function properly	X		
e. Rough or sharp edges on wire or clamp			X
f. Wire cannot be threaded thru binding	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

TABLE V.
End item visual defects - (continued)

Defects	Classification Major	Minor A	Minor B
VIII. CROWN PROTECTOR			
a. Twisted or poorly shaped		X	
b. Loop end loose or insecurely attached			X
c. Loop end finished less than 5/8 or more than 3/4 inch from folded edge		X	
d. Not completely or not securely caught in steel wire or front stand binding affecting service ability	X		
e. Too short, distorting shape of steel wire		X	
f. Too long, causing protector to sag excessively		X	
g. Face side of protector facing upwards			X
IX. CARD HOLDER OR CROWN PROTECTOR			
a. Not stitched or heat sealed to face side of crown protector			X
b. Not stitched or heat sealed on four sides, excluding open end of pocket			X
c. Open end pocket:			
1. Less than 3 inches but not more than 3-1/8 inches in depth			X
2. Less than 2 inches but not more than 2-1/8 inches in width			X
X. INNER BAND			
a. Crushed, broken, warped or misshapen, affecting serviceability or appearance		X	
b. Overlapped ends insecurely fastened			X
c. Molded design not facing outward		X	
d. Ends overlapped less than 7/8 inch or more than 1-1/8 inches			X
e. One or both staples, when applicable, not horizontally positioned on the solid (unperforated) portion of the inner band			X
f. Holes for side buttons positioned less than 5-3/8 or more than 5-3/8 inches from center of hole to center front of cap frame			X
g. Holes for side buttons positioned less than 1/2 or more than 5/8 inch from bottom edge of inner band		X	
h. Holes for side buttons not proper diameter		X	
XI. VISOR			
a. Not securely or evenly stitched with sweatband welt to inner headband	X		
b. Set from vertical front of cap at an angle of more than 35 degrees or less than 30 degrees			X

Source: https://assist.dla.mil Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

TABLE V.
End item visual defects - (continued)

Defects	Classification Major	Minor A	Minor B
c. Center of visor offset from center of crown support by more than:			
1. 3/8 inch	X		
2. 1/4 to 3/8 inch		X	
3. 1/8 to 1/4 inch			X
d. Skiving omitted on inside edge		X	
e. Front edge uneven or not molded to proper shade	X		
f. Binding not securely caught to edge of visor	X		
g. Binding not firmly and smoothly joined to visor edge, affecting appearance	X		
h. Binding peeling, cracking, tacky, spotted, discolored or blistered	X		
i. Finished width of binding on top of visor under 3/16 inch or over 1/4 inch (but of uniform width)	X		
j. Binding not of uniform width on top of visor, affecting appearance	X		
k. Width of visor at center less than 2-3/16 inches or more than 2-5/16 inches			X
l. Distance between ends of attached visor at headband less than 10-3/4 or more than 11-1/4 inches	X		
m. Poorly laminated, affecting appearance	X		
n. Underside (leather) portion of visor not finished grain side up		X	
o. Distorted, twisted or puckered, affecting appearance	X		
p. Binding twisted, puckered, or pleated affecting appearance		X	
q. Front edge poorly shaped, affecting appearance		X	
r. Placed off center with center of each button by 1/4 inch or more		X	
XII. SWEATBAND			
a. Exposed below bottom edge of cap frame or positioned more than 1/4 inch above bottom edge of cap frame		X	
b. Finished width less than 1-1/2 inches or more than 1-3/4 inches		X	
c. Twisted or puckered		X	
d. Color not as specified		X	
e. Back seam offset from center back of cap frame by more than 1/4 inch		X	
f. Ends not abutted		X	
g. Ends not securely attached			X

Source: https://assist.dla.mil - Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

TABLE V.
End item visual defects - (continued)

Defects	Classification Major	Minor A	Minor B
XIII. INSIGNIA (TYPE I, CLASSES 1 AND 2 VISOR TOP)			
a. Omitted	X		
b. Incorrect design	X		
c. Any defective area, affecting appearance		X	
XIV. CHIN STRAPS AND LOOPS			
* a. Length of each slide under 9-1/4 inches or over 9-3/4 inches		X	
b. Width of each section under 9/16 inch or over 11/16 inch		X	
c. Edges of straps or points or loop not embossed	X		
d. Loop not securely stitched to top strap or not stapled with two staples	X		
e. Bottom section of loop not securely stapled to bottom strap	X		
f. Center of hole under 11/32 inch or over 13/32 inch from end of strap			X
g. Size of eyelet opening or punched hole under 5/32 inch or over 1/4 inch			X
h. Holes off center of strap over 1/32 inch			X
i. Opening of loop narrow, curling edge of strap	X		
XV. WELT STRIP, POLYESTER/WOOL SERGE			
a. Twisted, puckered, or pleated		X	
b. Irregular in width		X	
c. Too tight, distorting shape of innerband		X	
d. Raised welt edge omitted	X		
e. Raised welt edge less than 1/4 inch or more than 5/16 inch from bottom edge of inner band		X	
f. Raised welt edge irregular, affecting appearance		X	
g. Welt stitching not placed on upper side of raised edge		X	
h. Top edge not overedged stitched	X		
i. Row of attachment stitching at base of overedge stitching omitted	X		
j. Back seam of welt strip offset from center back of cap frame by more than 1/4 inch			X
XVI. LABELS			
a. Combination identification and size label:			
1. Omitted, incorrect, or illegible	X		
2. Misplaced or stitching through printing		X	
3. Insecurely attached		X	
4. Not attached as specified			X
b. Size label:			
1. Omitted, incorrect, or illegible	X		

Source: https://assist.dla.mil Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

TABLE V.
End item visual defects - (continued)

Defects	Classification Major	Minor A	Minor B
2. Misplaced		X	
3. Insecurely attached		X	
c. Special instruction label:			
1. Omitted, incorrect, or illegible	X		
2. Size of label not as specified			X
3. Size of letters less than 3/32 inch in height			X
d. Box identification label:			
1. Omitted, incorrect, or illegible	X		
XVII. BUTTONS AND SCREW TUBES			
a. Length of screw tube not as specified		X	
b. Any defect on face of button affecting appearance		X	
c. Damaged, does not function properly	X		
d. Tube(s) not securely locked			X
XVIII. CAP COVER BAND			
a. Outside puckered, pleated, or twisted	X		
b. The seam formed when joining the webbing and braid of the band not pressed flat			X
c. The finished band less than 1-3/8 inches or more than 1-5/8 inches wide		X	
d. Overedge stitching in the joining of the band to the flare omitted			X
XIX. BINDING			
a. Omitted	X		
b. Binding strip other than bias-cut			X
c. The binding strip not turned under and positioned evenly over the flare and top piece seam			X
d. The binding tape finished less than 3/8 inch or more than 1/2 inch wide on major portion of seam			X
e. The end of binding tape overlapped less than 1-1/2 inches at center of back seam			X
XX. CROWN PIECE			
a. Other than one piece	X		
b. Puckering in the joining of the top piece to the flare		X	
XXI. FLARE			
a. The finished flare at center of front less than 2-3/8 inches or more than 2-5/8 inches		X	
b. The finished flare at center of back less than 1-7/8 inches or more than 2-1/8 inches		X	
c. The seam formed when joining the three pieces of flare not pressed flat		X	

Source: https://assist.dla.mil Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

TABLE V.
End item visual defects - (continued)

Defects	Classification Major	Minor A	Minor B
XXII. BUTTONHOLE			
a. Any buttonhole omitted	X		
b. Other than type or size required	X		
c. Stitches not securely caught in fabric, causing stitches to pull away from fabric	X		
d. One or more broken stitches in one buttonhole			X
e. One or more broken stitches in two buttonholes		X	
f. Any buttonhole uncut		X	
g. Ragged buttonhole			X
h. Length of any buttonhole less than 11/16 inch or more than 13/16 inch			X
i. Any buttonhole positioned less than 1/8 inch or more than 3/16 inch from bottom edge of band to center of buttonhole			X
j. Any buttonhole positioned less than 5-3/8 inches or more than 5-5/8 inches from center front of cap cover to center of buttonhole			X
XXIII. BLOCKING			
a. Blocking omitted	X		
b. Crown burned or scorched	X		
c. Poorly blocked, causing a shine or wrinkle		X	
XXIV. MOUNT			
a. Color of background cloth for face side of mount not as specified		X	
b. Color of leatherette (mount backing) not as specified		X	
c. Design and/or configuration not as specified	X		
d. Construction not as specified	X		
e. Perforations for screwpost holes omitted	X		
XXV. BAND			
a. Color of material not specified blue		X	
b. Width not as specified	X		
c. Length, exclusive of fraying, not as specified	X		
d. Material not braided		X	

4.4.3.2 Size measurement. Any measurement deviating from dimensions and tolerances specified in Table IV shall be scored as a size measurement defect.

4.4.3.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's), expressed in defects per 100 units (DHU), shall be as follows:

Source: https://assist.dla.mil Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

	Inspection level	AQL
For visual examination in 4.4.2.1	III	
Major		1.5
Major and Minor A		6.5
Totals (Major, Minor A, and Minor B combined		15.0
For measurements examination in 4.4.2.2	S-3	4.0

4.5 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units in accordance with MIL-STD-105.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged o distorted container.
Content	Number of items per shipping container is more or less tha required.
	Size shown on one or more items not as specified on shipping containers. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

4.6 Palletization examination. An examination shall be made to determine that the palletization complies with the Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defects
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified Load not bonded with required straps a specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level C or Industrial as specified (see 6.2).

* 5.1.1 Level C

* 5.1.1.1 Assembled service caps. Each fully assembled service cap consisting of a cap frame, cap cover, mount and band, with a special instruction label (see 3.3.5.1.3), shall be inserted into a clear polyethylene film bag having a thickness of 0.00125 inch (± 25 % tolerance). The bag shall be formed with heat sealed seams. As an alternate, the bag may be fabricated from polyethylene film tubing or sheeting. The service cap visor shall face the bag opening and the opening of the bag shall extend a minimum of 6 inches beyond the cap visor. Closure of the polyethylene bag shall be accomplished by means of a mechanical tie (paper or plastic covered soft wire, aluminum band, etc.).

- An additional cap cover shall be inserted flat in a clear polyethylene film bag of 0.00125 inch thickness (± 25% tolerance) that has been formed with heat sealed seams. The bag may also be fabricated from polyethylene film tubing or sheeting. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

- A fully assembled service cap and extra cap cover shall be inserted in a box (see 5.1.3) with one piece of white tissue on inside box bottom and one piece of white tissue on top of cap.

* 5.1.1.2 Cap covers (when procured separately). Each type II cap cover shall be inserted flat in a clear polyethylene film bag of 0.00125 inch thickness (± 25% tolerance) that has been formed with heat sealed seams. The bag may also be fabricated from polyethylene film tubing or sheeting. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape.

5.1.2 Industrial (Commercial packaging). Each fully assembled service cap shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package shall be the same as that normally used by the contractor for retail distribution.

- An additional cap cover shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the contractor to the first receiving activity.

* 5.1.3 Cap box. The cap box shall be a square type and conform to variety 1, group III, style X, type H of PPP-P-566 with a tuck n' lock bottom and a folding lock top with protruding handle in order to carry the box. The box shall be white, having a finished interior dimension of 12 X 13-1/8 X 6-1/4. The protruding handle shall have as inside opening of approximately 4 inches and shall be on the side of the box. The box shall be marked with either a printed self-adhesive label or an ink stamp on the top side near the handle (see 3.3.5.3).

5.2 Packing. Packing shall be level C or Industrial as specified (see 6.2).

* 5.2.1 Level C.

* 5.2.1.1 Assembled service caps. Twelve boxes of assembled service caps of one type, class, and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF, variety DW, class domestic, grade 275 of PPP-B-636. Packages shall be placed one on top of each other three in length, one in width, and four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 36-3/8 inches in length, 13-1/8 inches in width, and 26-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

Source: https://assist.dla.mil - Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

* 5.2.1.2 Cap covers (when procured separately). Forty (40) cap covers of one size only, packaged as specified in 5.1.1.2, shall be packed in a fiberboard shipping container conforming to type CF, class domestic, variety DW, Grade 275, style RSC-L of PPP-B-636. The fiberboard for the box liner shall conform to type CF, class domestic of PPP-B-636. The inside dimensions of the shipping container shall be approximately 21 inches in length, 12 inches in width and 9 inches in depth. Approximate dimensions are furnished as a guide only. Level A packages shall be packed flat, two in length, one in width and twenty in depth within a shipping container. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Each shipping container shall be closed in accordance with method III and reinforced as specified in appendix of PPP-B-636.

5.2.2 Industrial. An assembled service cap and extra cap cover packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with U.S. Postal Manual, Uniform Freight Clarification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

* 5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry, winged pallet in accordance with load type Ia of MIL-STD-147. Pallet pattern shall be number 2 of MIL-STD-147. Each shipping container and pallet load shall contain only one NSN.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The combination cap covered by this specification is intended for use by all male personnel of the Coast Guard.

6.2 Acquisition requirements. Acquisition documents should specify the following:

Source: https://assist.dla.mil - Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

a. Title, number, and date of this specification.
b. Type, class, and size required (see 1.2.1).
c. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article inspection is required (see 3.2) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.
e. Levels of preservation and packing (see 5.1 and 5.2).
f. When palletization is required (see 5.2.4).

6.3 Samples. For access to samples, address the procuring activity issuing the invitation for bids (see 3.1).

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification.

* 6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.6 Metal fittings. The grommet wire and clamp described in 3.3.1.8.1 and 3.3.1.8.2 may be procured from Excel Tool and Die Company, 69 Summer Street, Quincy, MA 02169. Any other supplier with a similar item that is equal to or better than the approved source will also be acceptable.

* 6.7 Webbing. A suggested source for the elastic webbing described in 3.3.2.2 for the band on the cap cover and mount is Sun Elastic Corp., Hialeah, FL. Any other supplier with a similar item that is equal to or better than the approved source will also be acceptable.

* 6.8 Combination cap box. A suggested source for the box described in 5.1.3 for the assembled combination cap (frame, cover, mount, and band) and extra cap cover is Foremost Corrigated Container Corp., Moonachie, NJ. Any other supplier with a similar item that is equal to or better than the approved source will also be acceptable.

Source: https://assist.dla.mil - Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

6.9 Subject term (key word) listing.

Crown cover, CG combination
Frame, CG combination
Mount and band, CG combination
Service cap, CG

Custodian:
Coast Guard - CG

Preparing Activity:
DLA - CT

Project No.
8405-0185

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.


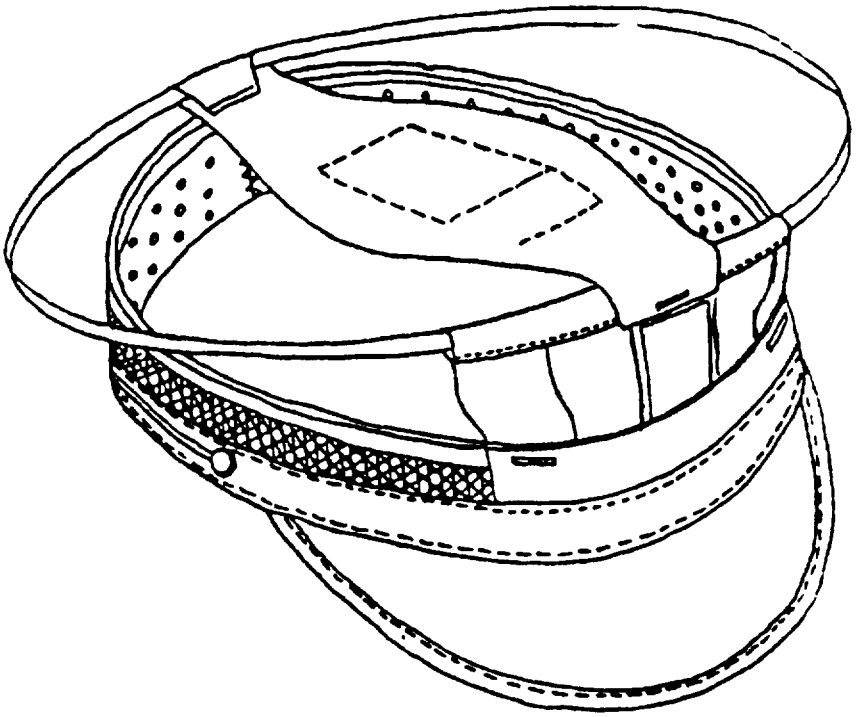


FIGURE 1
FRAME, SERVICE CAP, MAN'S


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.



TYPE 1 - CLASS 1 - CLOTH TOP
FLAG RANK OFFICERS

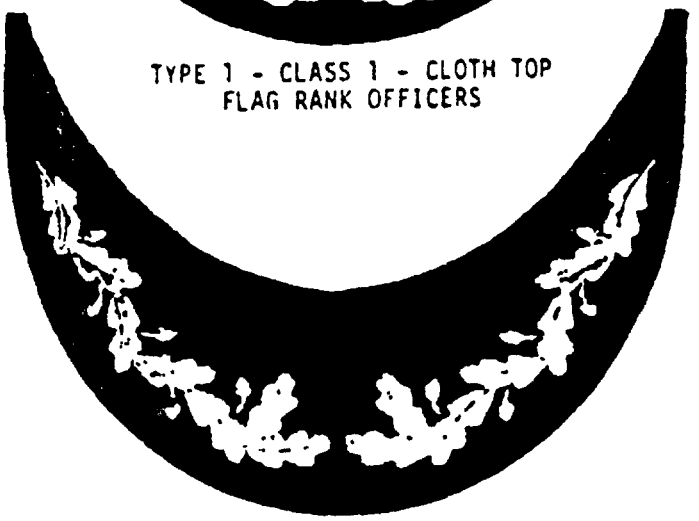

TYPE 1 - CLASS 2 - CLOTH TOP
CAPTAINS AND COMMANDERS

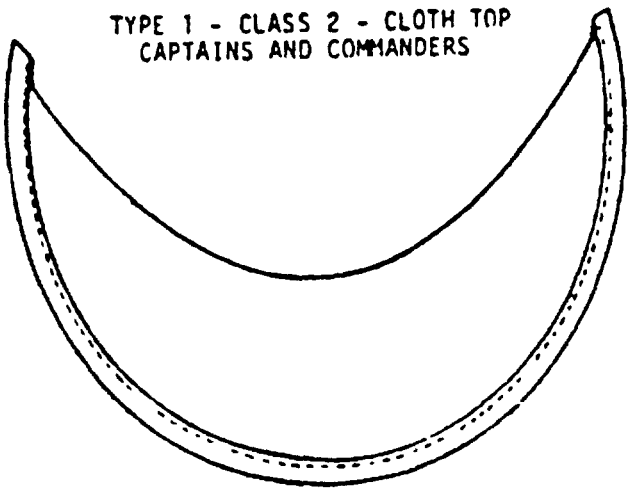


TYPE 2 - PLASTIC TOP


VISORS

FIGURE 2
FRAME, SERVICE CAP, (MAN'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

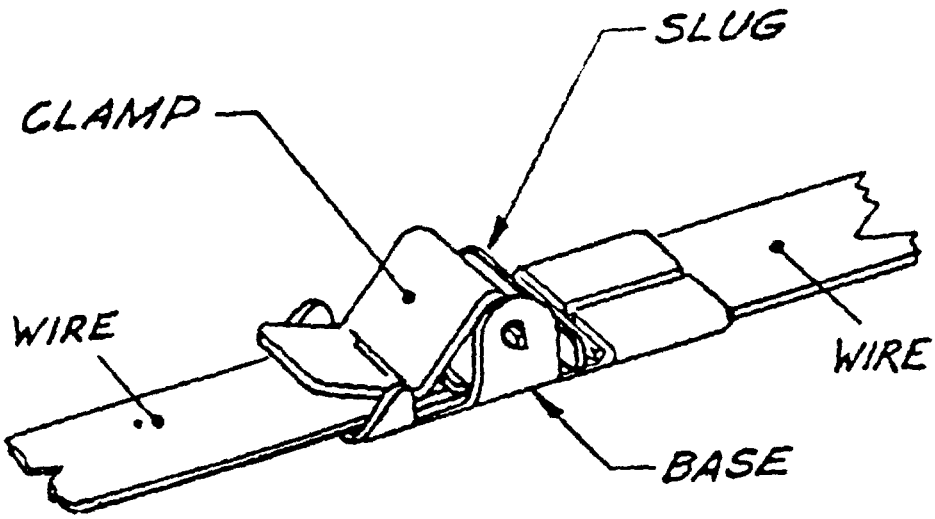


ASSEMBLY

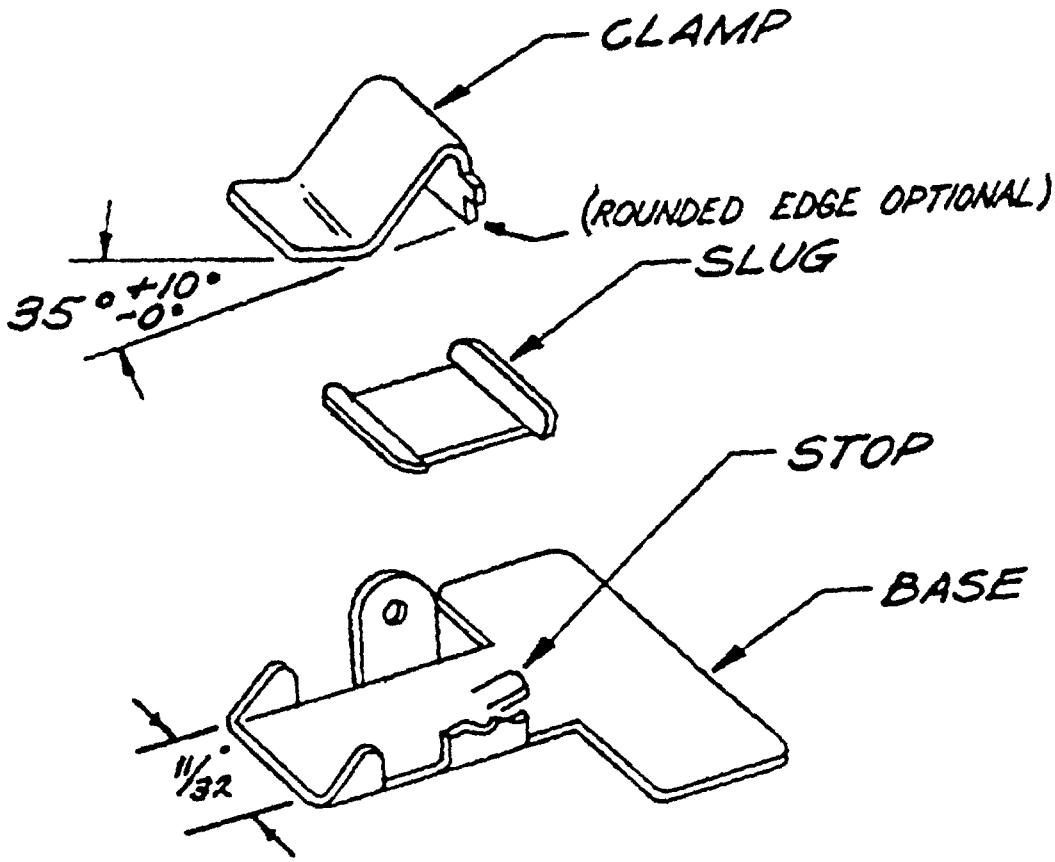

EXPLODED VIEW

FIGURE 3
CLAMP

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

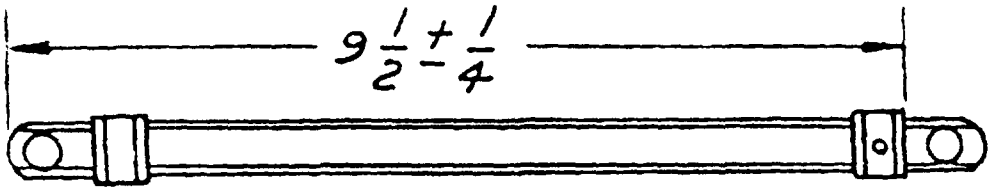

DETAIL: CHIN STRAP

FIGURE 4
FRAME, CAP, MAN'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.



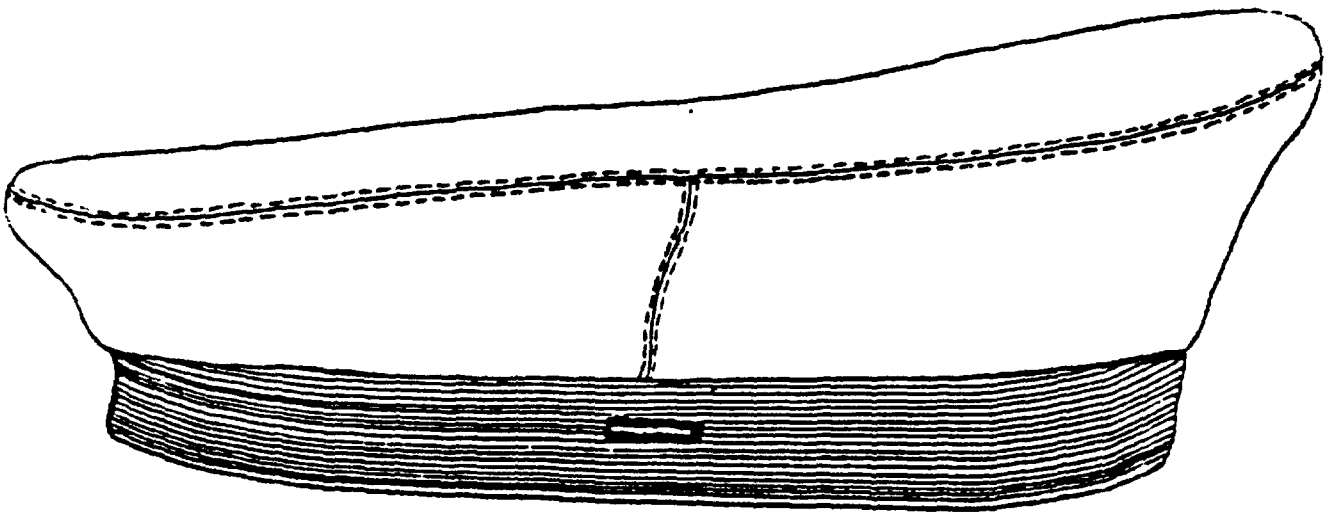


FIGURE 5
CAP COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

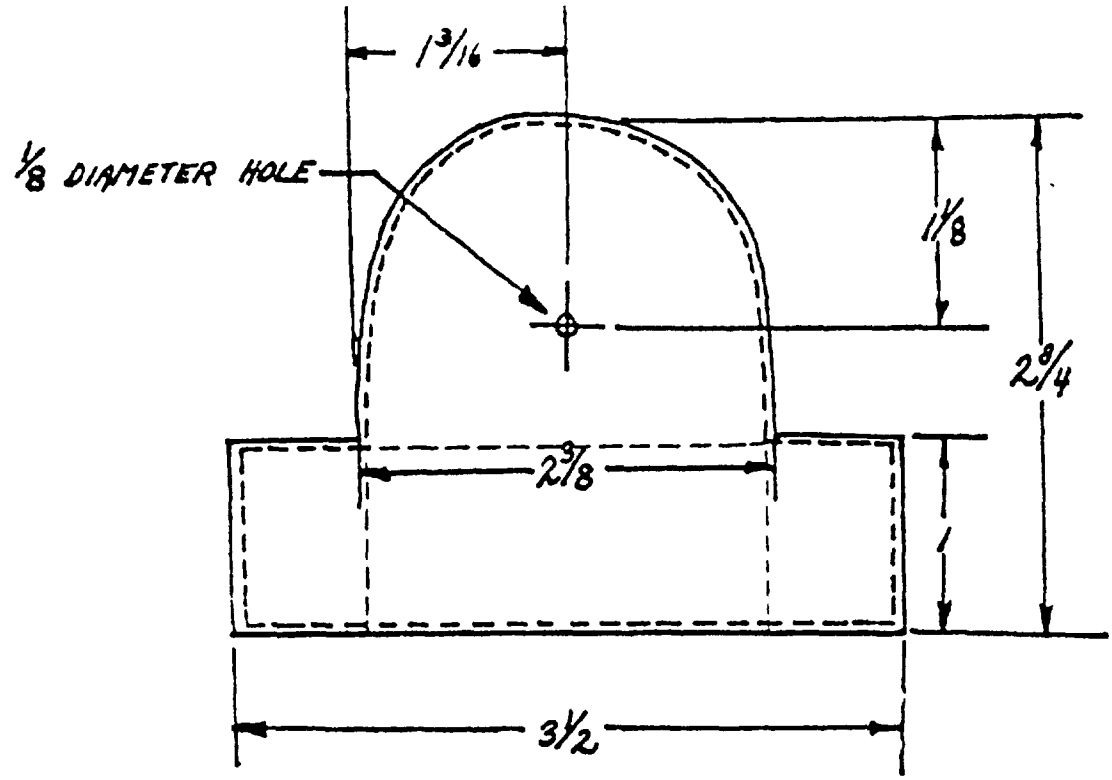

ENLISTED MOUNT

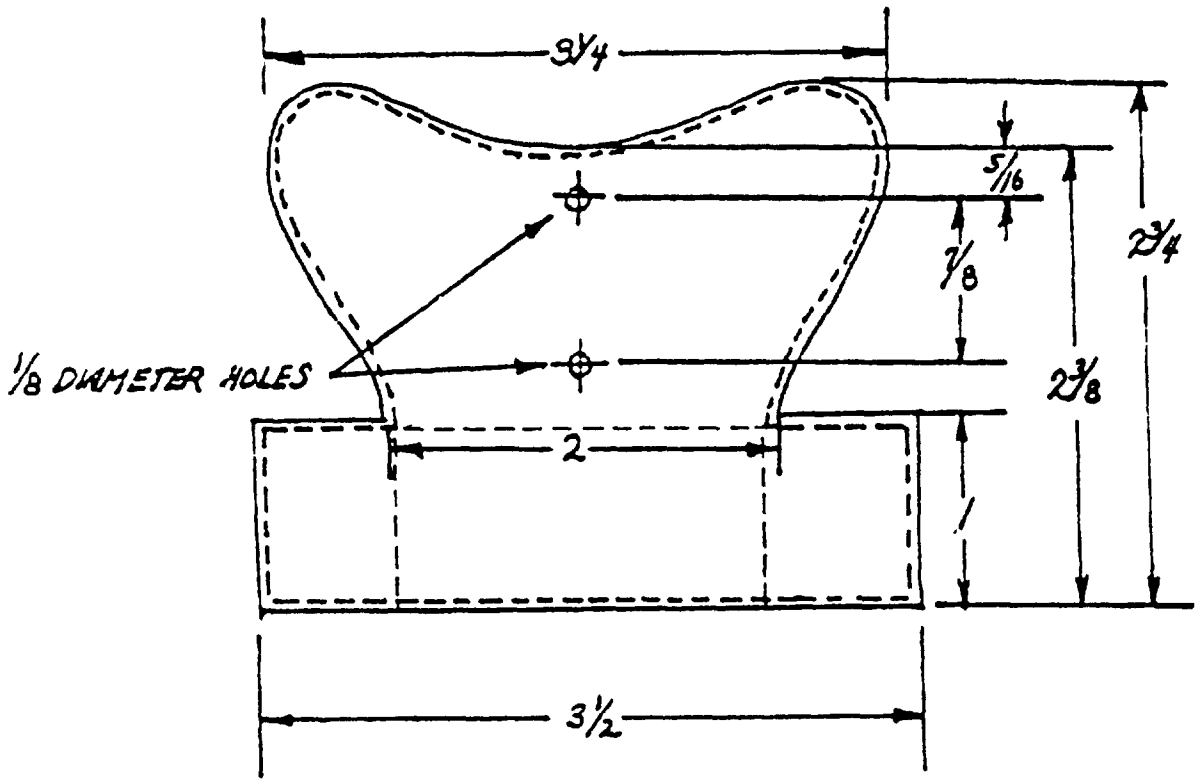

OFFICERS MOUNT

NOTE MEASUREMENTS IN INCHES - TOLERANCE ± 1/16 INCH

FIGURE 6
INSIGNIA MOUNTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1 The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given

2 The submitter of this form must complete blocks 4, 5, 6, and 7

3 The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER MIL-C-24937A	2 DOCUMENT DATE (YYMMDD) 1993, June 02

3. DOCUMENT TITLE
CAP, COMBINATION, MAN'S, (CG)

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
c. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial (2) AUTOVON (*If applicable*)	7. DATE SUBMITTED (YYMMDD)

8 PREPARING ACTIVITY

a NAME Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	b TELEPHONE (*Include Area Code*) (1) Commercial (2) AUTOVON
c ADDRESS (*Include Zip Code*) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:07Z
Check the source to verify that this is the current version before use.