INCH-POUND
MIL-DTL-24936A
30 MAY 2024
SUPERSEDING
MIL-H-24936
01 JUL 1987

MILITARY SPECIFICATION

HOOD, ANTI-FLASH, FLAME RESISTANT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type and size knitted 80% PFR rayon/20% PBI hood.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

Comments, suggestions, or questions on this document should be addressed: Attn: Troop Support Clothing And Textiles, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Since contact information can change, you may want to verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.dla.mil.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AMSC N/A FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:06Z
Check the source to verify that this is the current version before use.

COMMERCIAL ITEM DESCRIPTION

A-A-55217 - Thread, Meta-Aramid, Spun Staple

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-32075 - Label: for Clothing, Equipage, and Tentage, (General Use)

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-129 - Marking For Shipment and Storage

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN SOCIETY FOR QUALITY

ASQC Z1.4 - Procedures, Sampling And Tables For Inspection By Attributes

(Copies of this document are available from http://www.asq.org.)

ASTM INTERNATIONAL

ASTM D1777	-	Standard Test Method for Thickness of Textile Materials
ASTM D3776	-	Standard Test Methods for Mass Per Unit Area (Weight) of Fabric
ASTM D3787	-	Standard Test Method for Bursting Strength of Textiles - Constant- Rate-of-Traverse (CRT) Ball Burst Test
ASTM D6193	-	Standard Practice For Stitches And Seams
ASTM D6413/D6413M	-	Standard Test Method for Flame Resistance of Textiles (Vertical Test)
ASTM D8007	-	Standard Test Method for Wale and Course Count of Weft Knitted Fabrics

(Copies of these documents are available from http://www.astm.org.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:06Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material used in the hood shall be a 1X1 rib knit of 80% PFR rayon and 20% PBI blended yarn, when tested as specified in 4.4.1.

3.3.1.1 Rayon. The PFR (Permanently Flame Retardant) rayon is manufactured by metering water-insoluble phosphorous-based chemical compounds into viscose solution from which rayon fibers are spun. The fibers contain the flame retardant which is highly dispersed in a matrix of cellulose. The fiber shall be a nominal 1.5 to 2.0 denier and nominal 1.5 to 2 inch staple cut length, when tested as specified in 4.4.1

3.3.1.2 PBI. The fiber shall be 1-$^{1}/_{2}$ denier, 2 inch staple, when tested as specified in.4.4.1.

3.3.1.3 Color. The color shall be natural.

3.3.1.4 Physical requirements. The finished cloth shall conform to the physical requirements shown in Table I when tested as specified in 4.4.1.

TABLE I
Physical requirements

CHARACTERISTICS	MINIMUM	MAXIMUM
Weight, oz./sq. yd.	5.5	6.5
Thickness, inches	0.035	0.050
Wales per inch	20	23
Courses per inch	28	35
Burst strength, lbs.	50	
Flame resistance:		
After flame time, seconds		1.0
After glow time, seconds		1.0
Char length, inches		2.0

3.3.1.5 Yarn. The yarn shall be 19.5/1 CC plus or minus 0.8 CC, when tested as specified in 4.4.1.

3.3.2 Thread. The thread for seaming and stitching the hood shall be aramid, spun staple, ticket no. 45, 3-ply, conforming to A-A-55217. The color of the thread shall be natural.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:06Z
Check the source to verify that this is the current version before use.

3.3.3 Cotton elastic webbing. The unbleached elastic cotton webbing shall conform to the requirements in Table II (see 6.4), when tested as specified in 4.4.1.

TABLE II
Webbing properties

Width (inches)	Thickness (inches)	Ounces per linear yard	Elongation (inches)
$^{1}/_{4} \pm {}^{1}/_{32}$	.016-.046	0.083 (± 0.02)	3.5 (± 0.5)

3.3.4 Binding. The binding for the face opening of the hood and the bottom edge of the yoke shall be basic material as specified in 3.3.1. The binding shall be cut 1-$^{1}/_{4}$ inch wide, at a 5 degree crosscut pattern in continuous roll lengths. The bias binding finish length shall be 11/16 inch in lieu of 9/16 inch, the width is increased by 1/8 inch.

3.3.5 Label. Each finished hood shall have a combination identification and warning label conforming to type V, class 15, of MIL-DTL-32075. The cloth label shall be cotton and the adhesive coating is not required. The printing shall show fastness to laundering, and shall bear the following inscription:

HOOD, ANTIFLASH, FLAME RESISTANT
CONTRACT NO: DLA-100-00-0-0000 (Example)
FIBER CONTENT: 80% PFR RAYON/20% PBI
NAME AND ADDRESS OF CONTRACTOR:
STOCK NO: 8415-00-000-0000 (EXAMPLE)

LAUNDERING INSTRUCTIONS

Machine wash warm
Tumble dry medium heat

or

Follow NAVEDTRA Manual 414-01-45-81,
Formula III

WARNING

DO NOT KEEP IN DIRECT CONTACT WITH FLAME.
KEEP GARMENT CLEAN, SOILING WILL REDUCE
PROTECTIVE QUALITIES. FAILURE TO COMPLY WITH
INSTRUCTIONS MAY RESULT IN SERIOUS INJURY.

DO NOT REMOVE THIS LABEL

3.4 Design. The hood shall be shoulder length, round at the top and flared at the bottom. The circular face opening shall have bias binding with enclosed elastic webbing. The top portion of the hood shall be two plies of the basic material and the yoke shall be single ply of the basic material.

3.4.1 Figure. Figure 1 is furnished for information purposes only. When inconsistencies exist between the specification and the figure, the specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:06Z
Check the source to verify that this is the current version before use.

3.5 Patterns. Standard patterns to be used to cut the working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.5.1 List of pattern parts. The component parts of the hood shall be cut from the material as specified, and in accordance with the number of parts required for the manufacturing process as follows:

Materials	Nomenclature of pattern parts	Cut parts
Cloth, knitted	Hood top	2
80% PFR rayon/20% PBI	Yoke	2

3.6 Construction.

3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in Table III shall conform to ASTM D6193. Whenever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. The looper thread (underthread) of all stitch types shall be on the inside of the hood. The stitching on the binding will be gauged so that (1) the distance between the rows of stitching is $^1/_4$ ($\pm$ $^1/_{16}$) inch, and (2) the distance from the folded edges to the stitching is $^1/_8$ ($\pm$ $^1/_{16}$) inch.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table III.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitchings, shall be backtacked not less than $^1/_4$ inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than $^1/_2$ inch. Skipped stitches or thread breaks, shall be repaired by using 301 stitch type.

3.7 Manufacturing operation requirements. The contractor shall manufacture the hoods in accordance with the operations specified in Table III. The contractor is not required to follow the exact sequence of operations listed provided that the finished hood is identical to that produced by following the sequence of operations as listed in Table III.

3.7.1 Abbreviations in table of operations. The abbreviations used in table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:06Z
Check the source to verify that this is the current version before use.

dbl - double
chnstch - chainstitch

Table III
Construction of hood

No.	Operation	Stch Type	Seam/Stch type	Stch in	Ndl	Thread Bob/Lpr
1.	Cutting					
	a. All parts of the hood shall be cut in strict accordance with patterns furnished which show shape, directional lines for cutting, placement of component parts, and notches for proper assembly of all component parts.					
	b. Cut elastic webbing as specified (see 3.3.3) 10-1/4 (± 1/4) inches for the face opening.					
2.	Replacement of defective components					
	During spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in Section 4, shall be removed from production and replaced with non-defective and properly matched components.					
3.	Assemble hood top.					
	Place both plies together so that all raw edges are even. NOTE: Work all hood top operations as two ply. To eliminate slippage of plies, stay stitching may be used along the outer edge, excluding the face opening.					
4.	Bind face opening.	402 or 406	BSb-2	15-17	45	45
	a. Keeping the raw edges of the face opening even, stitch the binding while enclosing the elastic webbing.					
	b. The elastic shall be fully extended and positioned between stitch lines of the binding. (Caution: Care shall be taken so that the elastic is not caught in stitching.)					
	c. The finished width and gauge of the binding shall be as specified (see 3.3.4 and 3.6.1).					
5.	Stitch center back of hood top.	607	FSa-1	12-14	45	45
	a. Abut seams of center back of hood top and seam from neck edge to face opening.					
	b. Extend chain of type 607 stitching 1/2 to 3/4					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:06Z
Check the source to verify that this is the current version before use.

	inch.					
6.	Bind bottom edge of yoke pieces.	402 or 406	BSb-2	15-17	45	45
	a. Stitch the binding to the bottom edge of both yoke pieces.					
	b. The finished width and the gauge of the binding shall be as specified (see 3.3.4 and 3.6.1).					
7.	Seam yoke.	607	FSa-1	12-14	45	45
	a. Abut one shoulder seam of both yoke pieces, stitching, from neck edge to bottom edge.					
	b. Extend chain of the type 607 stitching $^{1}/_{2}$ to $^{3}/_{4}$ inch.					
8.	Join yoke to hook top.	607	FSa-1	12-14	45	45
	a. The hood top neck edge and the yoke neck edge shall be aligned according to the patterns. Starting at the open shoulder seam of yoke, stitch the yoke to the hood top with seams abutted along neck edge returning to starting point and continuing down shoulder seam bottom edge.					
	b. Extend chain of the type 607 stitching $^{1}/_{2}$ to $^{3}/_{4}$ inch.					
9.	Bartacking.	Brtck		16-18 per brtck	45	45
	a. Fold under runoffs in operations 5, 7, and 8 and bartack $^{1}/_{8}$ ($\pm$ $^{1}/_{16}$) inch from finished edge. Trim chain to $^{1}/_{4}$ inch.					
	b. The width of the bartack shall be $^{1}/_{2}$ ($\pm$ $^{1}/_{8}$) inch.					
10.	Labeling.					
	Each hood shall have the combination identification and warning label stitched on all four sides to the inside center of the back yoke. The label shall be centered and positioned approximately $^{1}/_{4}$ inch above the binding. Stitching shall not be through the printing.	301	LSbj-1	8-10	45	45
11.	Trimming and cleaning.					
	a. Trim all thread ends.					
	b. Remove all loose threads.					
	c. Remove all spots and stains.					

3.8 Measurements. The finished hood shall conform to the dimensions specified in Table IV. All measurements are expressed in inches. The hood shall be positioned so that the side view is shown. The hood shall be smooth and flat, with all edges even.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:06Z
Check the source to verify that this is the current version before use.

Table IV
Finished Measurements

Measurements	Minimum	Maximum
Length of hood (A)	13	15-3/4
Length of yoke along shoulder seam (B)	4-1/4	5-1/4
Width Of Hood Top At Yoke Seam (C)		11

Note: A, B and C refer to Figure 1 below.

3.9 Workmanship. The finished hoods shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. VERIFICATION

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities capable of meeting the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The First Article, submitted in accordance with 3.2 and 6.2, shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with ASQ Z1.4, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:06Z
Check the source to verify that this is the current version before use.

applicable procurement documents. A certificate of compliance shall be submitted and will be acceptable for the webbing requirements of 3.3.3 and for the yarn size of 3.3.1.6. In addition, the knitted basic material shall be tested for the characteristics specified in Table V and in accordance with the referenced ASTM Standards test methods whenever applicable. Testing for all the requirements listed is applicable to the sample unit. The lot size shall be expressed in units of yards and the sample unit shall be one yard full width. The sample size shall be as follows:

Lot Size	**Sample Size**
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Table V
Fabric Test Methods

Characteristic	**Requirement paragraph**	**Test method**
Fiber		
PFR Rayon		
Identification, staple, denier	3.3.1.1	1/
PBI		
Identification, staple, denier	3.3.1.2	1/
Yarn blend	3.3.1	1/
Knit	3.3.1	Visual
Flame resistance		
Initially	3.3.1.4	ASTM D6413
Weight	3.3.1.4	ASTM D3776 Option C
Thickness	3.3.1.4	ASTM D1777 2/
Wales/Courses	3.3.1.4	ASTM D8007
Burst strength	3.3.1.4	ASTM D3787

1/ A certificate of compliance shall be submitted and will be acceptable for the stated requirements.
2/ A thickness gauge of the dead-weight type equipped with a dial graduated to read directly to .001inches shall be used. The pressor foot shall be circular, with a diameter of 1.129 ± 0.001 inches and with moving parts weighted to supply a total load of 0.60 ± 0.03 pounds per square inch to the specimen. The anvil shall be not less than 1.129 inches in diameter. The pressor foot and anvil surface shall be planned to within 0.001 inches and shall be parallel to each other to within 0.001 inches.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 through 4.4.2.3. The applicable inspection levels and acceptable quality levels (AQL's) shall be as Indicated in 4.4.2.3. The sample unit shall be one finished hood. The lot size shall be expressed in units of hoods.

4.4.2.1 Visual examination. The hoods shall be examined for defects classified in accordance with the list below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:06Z
Check the source to verify that this is the current version before use.

Defects	Classification	
	Major	Minor
I. MATERIAL DEFECTS:		
a. Any hole, cut, tear, mend or drop stitch	101	
b. Any loose knitting, causing sleaziness		201
c. Slubby yarn more than twice the size of the normal yarn		202
d. Any spot, stain, or streak		203
e. Barre		204
f. Foreign matter, fly and etc. (score only when condition is visible at a distance of three feet)	102	
II. CLEANNESS		
a. Any spot or stain		205
b. Thread ends not trimmed:		
- 3 or more $^{1}/_{4}$ inch or less on outside		206
- 5 or more $^{1}/_{2}$ inch or less on inside		207
III. COMPONENTS AND ASSEMBLY		
a. Any component not as specified	103	
b. Any operation not as specified (unless otherwise classified herein)		208
c. Any component part or operation omitted or not as specified (unless otherwise classified herein)	104	
d. Any component part tight, twisted, distorted, pleated, full, misshaped, or puckered (unless otherwise classified herein)		209
IV. CUTTING		
Any part not cut in accordance with directional lines indicated on patterns or in accordance with specification requirements		210
V. COLOR		
Not as specified		211
VI. SEAMS AND STITCHING		
a. Accuracy of seaming		
(1) Seams puckered, twisted of pleated (unless otherwise classified herein)		212
(2) Ends of all seams and stitchings when not caught in other seams or stitchings backtacked less than $^{1}/_{4}$ inch		213
(3) Part of hood caught in any unrelated stitching operation, seriously affecting serviceability	105	
(4) Not specified color thread used		214
(5) Gauge of stitching		
- Stitching irregular, not within range specified or varies more than $^{1}/_{16}$ inch when no range is specified (score only when condition exists on more than half the length of seam)		215
b. Open seams or runoffs		
(1) Up to $^{1}/_{4}$ inch inclusive		216
(2) More than $^{1}/_{4}$ inch	106	
NOTE: One or more broken stitches or two or more consecutive skipped or runoff stitches constitute an open seam.		
c. Seam and stitch type		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:06Z
Check the source to verify that this is the current version before use.

(1) Not specified seam or stitch type	107	
(2) Any line of stitching omitted or insecure		217
(3) Any line of stitching not beginning or ending where specified (unless otherwise classified herein)		218
(4) Looper thread on outside	108	
d. Stitch tension		
(1) Loose tension resulting in loose seam	109	
(2) Tight tension (stitches, break when normal strain is applied in the direction of the seam or stitching)	110	
(3) Loose tension resulting in loose or tangled loops of lower or top thread		219
e. Stitches per inch		
(1) More than the maximum specified		220
(2) Less than the minimum by two or more stitches		221
f. Bartacking		
(1) Missing, insecure, misplaced, not serving intended purpose, or not specified size or type		222
(2) Loose stitch tension		223
(3) Placed less than $^{1}/_{16}$ inch or more than $^{3}/_{16}$ inch from finished edge.	111	
VII. BIAS BINDING		
a. Not cut or made from basic material as specified herein	112	
b. Missing	113	
c. Finished width less than $^{7}/_{16}$ inch or more than $^{9}/_{16}$ inch		224
d. Twisted, puckered, or pleated		225
VIII. HOOD TOP		
Both plies not caught in seaming and stitching operations	114	
IX. ELASTIC		
a. Not as specified	115	
b. Missing	116	
c. Caught in stitching of binding	117	
X. LABEL		
a. Missing, incorrect, or illegible	118	
b. Not attached as specified, misplaced or stitching through the printing		226

4.4.2.2 Dimensional examination. The hoods shall be examined for dimensional defects. Any dimension that is not within specified tolerances shall be classified as a measurement defect.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and the acceptable quality levels (AQL's) expressed in defects per 100 units (DHU) shall be as follows:

	AQL	**Inspection level**
For visual examination in 4.4.2.1		
Major	2.5	II
Major and Minor (combined)	10.0	II
For dimensional examination in 4.4.2.2		
One class	4.0	S-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:06Z
Check the source to verify that this is the current version before use.

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	**Defect**
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Insufficient or improper application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, improper stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with ASQ Z1.4.

Examine	**Defect**
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5 PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Department or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:06Z
Check the source to verify that this is the current version before use.

THIS SPACE LEFT INTENTIONALLY BLANK

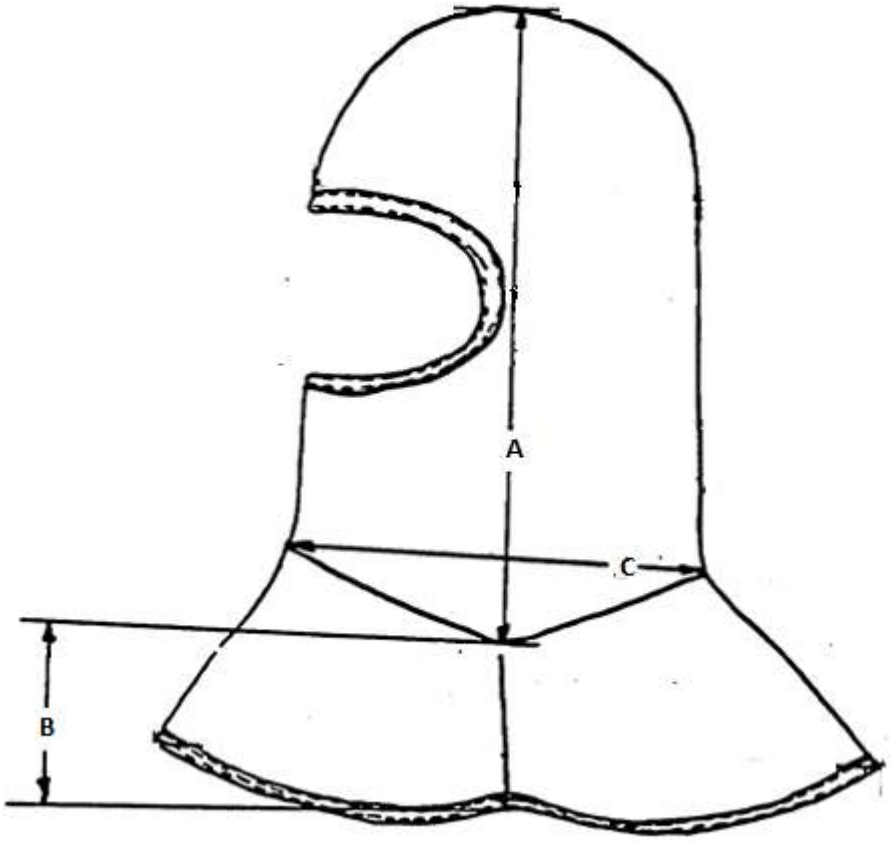


Figure 1
Hood, Anti-flash, Flame Resistant

6. NOTES

6.1 Intended use. The hoods covered by this specification are intended to protect Naval personnel from transient and elevated air temperatures, resulting from the use of high explosive weapons, and will be used with the Gloves, Anti-Flash, Flame Resistant (MIL-G-2874).

6.2 Ordering data. Procurement documents should specify the following:
a. Title, number and date of this specification.
b. When a first article sample is required (see 3.2 and 4.3) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity, and testing and approval of the first article.
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:06Z
Check the source to verify that this is the current version before use.

d. When palletization is required (see 5.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1).

6.4 Component sources. As a matter for information only, sources for components indicated in section 3 of this document are as follows:

Cotton elastic webbing, style # 2200132, 1/4 inch wide
The Star Glove Company
700 Merchant Street
Los Angeles, CA 90021
(213)628-1341

6.5 Subject term (key word) listing

Cloth, knit
Clothing, protective
Fiber, PBI/PFR rayon blend
Hood, flame resistant

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – GL
Navy – NU
Air Force – 11

Preparing Activity:
DLA – CT
Project 8415-2023-068

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:06Z
Check the source to verify that this is the current version before use.