INCH-POUND
MIL-O-24926A
3 April 1990
SUPERSEDING
MIL-O-24926
14 March 1986

MILITARY SPECIFICATION

OVERCOAT, WOMAN'S, ENLISTED

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for the enlisted woman's double breasted, finger tip length, overcoat (peacoat).

1.2 Classification. The overcoat shall be of one type only and in the following sizes and lengths (see 6.2):

Sizes - 6, 8, 10, 12, 14, 16, 18, 20, 38, 40, 42, and 44

Lengths - short, regular, and long

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-T-276	- Thread, Cotton
V-T-280	- Thread, Gimp, Cotton, Buttonhole
V-T-285	- Thread, Polyester
V-T-295	- Thread, Nylon
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
CCC-C-441	- Cloth, Corduroy, Cotton
DDD-L-20	- Label; for Clothing, Equipage, and Tentage (General Use)
DDD-T-86	- Tape, Textile, Cotton, General Purpose (Unbleached, Bleached, or Dyed)

MILITARY

MIL-C-297	- Cloth, Interlining, Cotton Warp, and Spun Hair-Wool, or Rayon Filling
MIL-B-371	- Braid, Textile (Tubular)
MIL-C-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-P-15064	- Pads, Shoulder and Sleeve-Head
MIL-C-15065	- Coat, Fronts
MIL-C-16290	- Cloth, Melton, Wool (Moth Proofed)
MIL-C-16375	- Cloth, Wigan, Cotton
MIL-B-17143	- Button, Insignia, (Anchor, Plastic, Black)
MIL-C-17155	- Cloth, Knitted, Nylon Fleece
MIL-B-17757	- Boxes, Shipping, Fiberboard, (Modular Sizes)
MIL-C-21852	- Cloth, Taffeta, Nylon
MIL-C-43525	- Cloth, Satin, Acetate or Rayon Face and Rayon or Cotton Back
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-43718	- Cloth, Twill, Polyester, Polyester and Cotton, Polyester and Rayon for Pockets

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
* MIL-STD-2073-1	- DOD Materials Procedures for Development and Application of Packaging Requirements
* MIL-STD-2073-2	- Packaging Requirement Codes

* (Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. POSTAL MANUAL

(Copies may be obtained from the Superintendent of Document, U.S. Government Printing Office, Washington, DC 20402-0001).

* 2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Sewing Threads
Department of Defense Standard Shade for Buttons

(Application for copies of color cards should be addressed to the Color Association of the United States, 343 Lexington Ave., New York, NY 10016-0927).

TECHNICAL MANUAL OF THE AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

Method No. 8 - 1988 - Colorfastness to Crocking: AATCC Crockmeter Method

(Application for copies should be addressed to the AATCC National Headquarters, P.O. Box 12215, Research Triangle Park, NC 27709-9989).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Materials. (See 6.4)

* 3.3.1 Basic material. The basic material shall be 22 ounce wool melton, shade Blue 3346, conforming to type II, class 4 of MIL-C-16290, piece number 84241.

3.3.2 Linings.

* 3.3.2.1 Lining, fleece. The knitted fleece material for lining the body shall conform to type III of MIL-C-17155.

* 3.3.2.2 Lining, sleeves, yoke, and inside breast pocket facing. The material for lining the sleeves, yoke, and inside breast pocket facing shall be a napped-back satin, dyed to match Black 3202, conforming to type II of MIL-C-43525, piece number 87036.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

3.3.3 Nylon binding. The binding for the back edge of facings, bottom raw edge and vent shall be nylon taffeta cloth conforming to type IV of MIL-C-21852. The color shall be black. The nylon shall be cut on a 45 (±5) degree angle in strips of 7/8 to 1 inch width. The ends of the strips shall be joined together by stitch type 301, seam type SSa-1 with 10-12 stitches per inch.

3.3.4 Pocketing.

3.3.4.1 Inside pockets. The material for the left inside pocket shall be polyester, polyester/cotton, or polyester/rayon twill conforming to class 1 of MIL-C-43718. The shade shall be natural or black shade 423.

* 3.3.4.2 Pocketing. The material for the front and cash pockets shall be a soft filled cotton flannel having a smooth suede finish on one side, in natural or gray shade and shall conform to the physical requirements shown in Table I when tested as specified in Table IV.

TABLE I - Physical Requirements

Characteristics	Minimum
Weight (oz./sq. yd.)	6.0
Yarns per inch:	
Warp	44
Filling	40
Breaking strength (pounds):	
Warp	60
Filling	35

The use of sulphur dyes and dyes containing elementary sulfur or sulfur compounds capable of oxidation to sulfuric acid is prohibited. The dyed material shall show a minimum of "good" colorfastness to wet-dry cleaning and shall show a AATCC Rating for crocking not lower than 3 when tested as specified in Table IV (see 4.4.1).

* 3.3.4.2.1 Pocketing. As an alternate, the material for the front pockets and cash pocket shall be cotton corduroy conforming to type I, class 1 of CCC-C-441.

3.3.5 Interlining. The material for interlining the collar shall be cotton warp, and spun hair-wool filling conforming to type I, class 2 of MIL-C-297. The color shall be black, grey, or natural.

3.3.6 Wigan. The material for interlining the sleeve bottoms shall be cotton wigan, natural color, conforming to type I of MIL-C-16375.

* 3.3.7 Coat front. The coat fronts shall be manufactured in accordance with type XX of MIL-C-15065.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

3.3.8 Shoulder and sleeve-head pads. The shoulder pads shall conform to type I, class 1 and the sleeve-head pads shall conform to type IV of MIL-P-15064.

3.3.9 Threads.

* 3.3.9.1 Cotton or polyester-core thread. The thread for seaming and stitching the overcoat shall be either an all cotton or a polyester core thread conforming to V-T-276 or MIL-T-43548. A polyester-covered, polyester-core thread is not allowed. The thread shall be dyed Black AA Cable No. 66043 of the Department of Defense Standard Shades for Sewing Threads, in the following types and sizes:

	Type 1/	Ticket No./ Ply 1/	Ticket No. 2/
Seaming and stitching	IC2	0/3	50
401 looper; 304 stitching	IC2	0/3	70
Tacking armholes and attaching sleeve-head pads	IA1 or IA2	30/3	30
Buttonholes and bartacks	IC2	A or B/3	30
Button sewing:			
Hand	IB3	12 or 16/4	30
Machine	IA3 or IB3	20/4	30

1/ Applies to V-T-276.
2/ Applies to MIL-T-43548.

3.3.9.2 Basting thread. Thread for basting and tacking may be bleached or unbleached and shall be of a good commercial grade cotton. A monofilament synthetic thread may be used for only those basting operations where the thread is required to be removed provided the garment is subsequently given a treatment by a cleaning agent in which the synthetic thread is soluble. When this thread is used, any residue remaining on the garment after the dry cleaning process shall be brushed or removed.

3.3.9.3 Felling thread.

3.3.9.3.1 Polyester thread. For machine felling and blind felling, polyester thread conforming to type I, size A/3 or AA/2 of V-T-285 or a monofilament nylon thread of comparable type and size shall be used. The color of the polyester thread shall be black.

3.3.9.3.2 Nylon thread. For hand felling, nylon thread conforming to type IV, size A/2 or C/2 of V-T-295 shall be used. The color shall be black.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

* 3.3.9.3.3 Colorfastness. The dyed threads shall show colorfastness to wet-dry cleaning and light equal to or better than the standard sample when tested as specified in V-T-276, V-T-285, V-T-295, or MIL-C-43548. As a limit of acceptability, or when no standard sample is available, the dyed thread shall show "good" colorfastness to wet-dry cleaning and light when tested as specified in V-T-276, V-T-285, V-T-295, and MIL-C-43548.

3.3.9.4 Gimp. The gimp for reinforcing the buttonholes shall be cotton, buttonhole-gimp thread conforming to type I or II, size No. 8 of V-T-280. The gimp shall be dyed black.

* 3.3.9.4.1 Colorfastness. The dyed thread shall show colorfastness to wet-dry cleaning equal to or better than the standard sample when tested as specified in V-T-280. As a limit of acceptability, or when no standard sample is available, the dyed thread shall show "good" colorfastness to wet-dry cleaning when tested as specified in V-T-280.

3.3.10 Tapes.

* 3.3.10.1 Woven tape. The tape shall be cotton, preshrunk, conforming to type I, class 1 or class 2 of DDD-T-86. The widths shall be as follows:

1/2 inch for staying lapels, fronts, bottom edges, and joining front facing
5/8 inch for staying bridle at breakline of lapel
1/4 inch for staying back armhole, lower part of front armhole, and fold line of left vent

* 3.3.10.2 Cross-cut tape. The tape for staying the front shoulder, neck gorge, back neckline and upperpart of front armhole shall conform to class 1 of MIL-C-43718. The tape shall be cut across the width of the cloth in strips 1/2 (±1/16) inch wide and shall be dyed or undyed. The raw edges of the tape shall be treated with a synthetic resin to prevent raveling (see 4.4.1).

* 3.3.10.3 Tape, fusible. As an alternate, the tape for joining the fronts and facings shall be woven or non-woven with a thermoplastic polyamide resin applied to the tape. The tape shall be natural color and shall be 5/8 inch in width (see 4.4.1).

3.3.11 Buttons.

3.3.11.1 Plastic anchor design buttons. The outside buttons shall conform to class 2 (50 ligne) of MIL-B-17143.

* 3.3.11.2 Plastic button. The plastic buttons for anchoring the right front on the inside of the coat and anchoring the shoulder epaulets shall be shade Black BT, Cable No. 62001 in accordance with the Department of Defense Standard Shade for Buttons conforming to type II, class D, style 20 and 21 of V-B-871. The hidden button for anchoring the right front on the inside of the coat shall be 45 ligne or as an alternate, the 50 ligne plastic anchor design button in paragraph 3.3.11.1 may be used. The epaulets shall have 30 ligne buttons.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

* 3.3.12 Hanger loop. The hanger loop shall be cotton tubular braid conforming to type III, class 1 of MIL-B-371, except that the color shall be black. The dyed braid shall show "good" colorfastness to wet-dry cleaning and shall show a AATCC Rating for crocking not lower than 3 when tested as specified in Table IV (see 4.4.1).

3.3.13 Labels.

* 3.3.13.1 Combination label. Each overcoat shall have a combination personal, identification and instruction label that conforms to type VI, classes 10 and 15 of DDD-L-20. The printing on the label shall show colorfastness to dry cleaning. The label shall bear the following inscription:

NAME:
SERVICE NO.:
OVERCOAT, WOMAN'S, ENLISTED (100% WOOL)
LINING: FLEECE (100% NYLON)
SATIN (RAYON FACE/COTTON BACK)
CONTRACT NO.: DLA 100-00-0-0000 (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (If other than contractor)

DRY CLEAN ONLY

3.3.13.2 Size label. Each overcoat shall have a separate size label conforming to type VI, class 2 of DDD-L-20 which shall indicate the size and stock number.

NOTE: The length (short, regular, or long) may be abbreviated as S, R, or L.

* 3.3.13.3 Removable size ticket. Each overcoat shall have a commercial type size ticket attached to the outside of the lower left sleeve. The ticket shall be 1-1/2 inches long and 2 inches high, made of a suitable plain white cardboard. The corners of the ticket may be double perforated for ease in tacking. The size (12R - Example) shall be printed or stamped on the upper left hand corner in black or blue ink. The lettering for the size shall be 1/4 inch in height. Abbreviations for lengths shall be allowed in accordance with 3.3.13.2.

* 3.4 Design. The double breasted overcoat is fleece lined (fleece side of lining away from the wearer), with napped-back satin sleeve and yoke linings, convertible collar, shoulder epaulets, two outside welt pockets (Beason), a cash pocket within the right outside pocket, a left inside breast pocket opening in the facing, a two-piece back with center vent, and seven 50-ligne black plastic anchor design buttons, one inside anchoring button, and 2 anchoring epaulet buttons.

3.4.1 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

* 3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the appearance, serviceability, or dimensional requirements cited in the specification. Unless otherwise specified in Table II, seam allowances shall be as follows:

Joining center back and side seams	1/2 inch
Joining shoulders, armholes, sleeves	3/8 inch
Joining facings to fronts	1/8 to 3/16 inch
Joining linings and yokes at sides and back	1/2 inch
Joining shoulders and sleeves of lining	3/8 inch
Joining undercollar to neckline	5/8 inch

* 3.5.1 Pattern parts. The component parts of the overcoat shall be cut from materials as specified and in accordance with the number of parts required for the manufacturing process as follows:

Material	Nomenclature of pattern parts	Cut parts
Cloth, melton, wool	Front	2
	Back	2
	Front Facing	2
	Topsleeve	2
	Undersleeve	2
	Topcollar	1
	Topcollar (Alternate)	1
	Undercollar Front	2
	Undercollar Back	2
	Front Pocket Welt (Beason)	2
	Pocket Facing	2
	Inside Breast Pocket, Welt	1
	Epaulet	4
Cloth, lining, fleece	Front Lining	2
	Back Lining, Left Side	1
	Back Lining, Right Side	1
Cloth, lining, satin	Front Yoke	2
	Back Yoke	1
	Inside Breast Pocket, Facing	1
	Topsleeve Lining	2
	Undersleeve Lining	2
Cloth, twill	Inside Breast Pocket, Inner Ply	1
	Inside Breast Pocket, Outer Ply	1
Cloth, flannel or corduroy	Pocket, Top Ply	2
	Pocket, Bottom Ply	2
	Cash Pocket	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Material	Nomenclature of pattern parts	Cut parts
Cloth, interlining	Undercollar Interlining, Front	2
	Undercollar Interlining, Back	2
Cloth, Wigan	Sleeve Bottom, Interlining	2
Templates	Undercollar Shaper	
	Undercollar Shaper (Alternate)	
	Lapel Shaper	
	Finished Collar and Lapel Shaper (For pressing only)	

3.6 Construction.

* 3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in Table II shall conform to the requirements of FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. Seam allowances shall be maintained with seams properly sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so there is no tight or loose stitching. Where stitch type 401 is used, the looper (under thread) shall be on the inside of the overcoat. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitching. Unless otherwise specified, edgestitching shall be 1/2 inch from the folded edge. Edgestitching shall be straight and parallel to the edge. Buttonholes shall be cut clean and the stitching shall be securely caught in the fabric. The bartacks shall be 3/8 to 1/2 inch long and 1/8 (± 1/32) inch wide.

* 3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching (except label) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than 3 stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks of 401 stitching shall be repaired by using 301 stitch type. When stitch type 401 is permitted, as an option, it shall not be used unless the ends are caught in other seams or stitching.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be specified in Table II.

* 3.7 Manufacturing operations requirements. The overcoats shall be manufactured in accordance with operation requirements specified in Table II. The contractor is not required to follow the exact sequence of operations listed provided that the finished overcoats are identical to those produced by following the sequence of operations as listed in Table II. Minor modifications are permitted where necessary when using automatic equipment. **These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification.**

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:01Z
Check the source to verify that this is the current version before use.

3.7.1 Shade and size marking. The component parts shall be marked or ticketed to insure a uniform shade and size throughout the overcoat. Any method may be used except:

(1) Corrosive metal fastening devices. No metal device or sew-on type marking shall be used on the satin lining.

(2) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp, or pencil is allowed, provided the numbering does not show on the outside of the overcoat and wherever possible, is covered by the seam allowance.

3.7.2 Pressing and fusing. All pressing operations referenced in Table II shall use a heated pressing iron and steam pressing machines designed specifically for the pressing operations being performed. Fusible tape shall be applied in accordance with the fusible manufacturer's recommended time, temperature, and pressure settings and in accordance with good commercial practice.

3.7.3 Abbreviations in table of operations. The abbreviations used in Table II are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
1.	Cutting.				
*	a. Cut the overcoats in strict accordance with the patterns provided which show size, shape, directional lines, and notches for proper assembly of all parts. Marking, spreading, and cutting procedures used shall be consistent with the precision results required for the proper construction of the overcoat. Perforated paper markers are prohibited on the basic fabric. Felt back and plain paper markers are permitted.				
*	b. Cut the component woolen parts of the overcoat from one piece of material, except the undercollar parts, pocket facings, and inside breast pocket welt which may be cut from ends. When so cut, these parts shall approximate the shade of the corresponding overcoat. The basic material shall be spread in the lengthwise direction with the nap of all plies running in the same direction. Accordingly, when making markers, all patterns of the component woolen parts shall be positioned so that the nap on the completed overcoat will run in the down direction only. The undercollar parts shall be shade marked and shall match each other when assembled. When alternate topcollar is used, it may be die cut.				
	c. Cut the component lining parts of the overcoat from one piece of material.				
	NOTE: (1) The fleeced or pile side of the knit lining material shall be considered the back side, and the unfleeced side, or smooth surface, shall be considered the face and shall finish toward the wearer.				
	(2) The smooth, satin surface of the yoke and sleeve lining parts shall be considered the face side.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
2.	Replacement of defective components.					
	During the spreading, cutting, and manufacturing process, components having material defects as specified in Table V, shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade and size marking. (see 3.7.1)					
	All parts except pocket facings, shall be marked or ticketed to insure properly sized and matching components.					
4.	Make collar.					
	a. The collar shall consist of a one-piece topcollar, a four-piece undercollar, and a four-piece interlining.					
	b. With face sides together, stitch 1/4 to 5/16 inch from edge along the undercollar center back seam, and seams joining center and end sections.	301	SSa-1	12-14	50	50
	c. Press seams open and flat with a heated pressing iron.					
	d. With the edges overlapped 3/8 inch, stitch 3/16 to 1/4 inch from edge, along interlining center back seam, and seams joining center and end sections.	301	LSa-1	12-14	50	50
	e. Mark breakline of undercollar to conform with notches on pattern.					
	f. Undercollar may be shaped with the alternate undercollar shaper.					
	g. Stitch interlining to undercollar along breakline mark.	301	SSv-1	12-14	50	50
	h. Blindstitch interlining to undercollar between breakline and outer edge of undercollar with not less than four equally spaced rows of stitching and between breakline and neck edge of undercollar with not less than two equally spaced rows of stitching.	Hand or 103 or 306	SSm-6 SSm-6 SSm-6	2-4 4-8 4-8	50 50 50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	i. Crease undercollar at breakline and press on a suitable pressing buck.					
	j. Unless alternate undercollar shaping is performed as prescribed in operation 4.f., mark and shape the undercollar with undercollar shaper.					
	k. Trim, where necessary, ends and outer edge of undercollar interlining. Trim interlining not more than 3/16 inch from the neck edge of undercollar.					
	l. Position, face to face, center of topcollar to center seam of undercollar. Stitch the topcollar to the undercollar 3/16 inch from edge, along the ends and outer edge putting fullness on topcollar, and making certain points are uniformly shaped. Trim excess topcollar material.	301	SSa-1	12-14	50	50
NOTE:	Use the topcollar cut from the alternate topcollar pattern when undercollar is shaped with the alternate undercollar shaper (see operation 4.f.). Omit trimming.					
	m. Turn collar to finished position. Baste along ends and outer edge, distributing the collar fullness evenly and rolling the joining seam to the underside. Trim neck edge of topcollar to allow for seaming and proper roll.	Hand or Mchne				
	n. Press collar, stretching the outer edge to conform to the shoulder contours, and removing excess fullness.					
5.	Make sleeves.					
	a. Sleeves shall be set-in type consisting of a topsleeve and undersleeve.					
	b. With face sides together, distribute fullness of the forearm seam of woolen sleeve, align notches and stitch 3/8 inch from raw edge.	301 or 401	SSa-1	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	c. Press forearm seam open and flat holding seam short.					
	d. Superimpose sleeve bottom interlining on inside of sleeve bottom, matching raw bottom edges. Stitch 3/8 inch from edge.	301 or 401	SSa-1	10-12	50 50	50 70
	e. Join, 3/8 inch from edge, face to face, the backarm seam of woolen sleeve, catching the ends of the interlining in the seam.	301 or 401	SSa-1	12-14	50 50	50 70
	f. Press backarm seam open and flat.					
	g. Turn up the sleeve bottom according to the notches, back side to back side, forming an even hem, and edge stitch 1/2 inch from folded edge. OR As an alternate, sleeve hems may be pre-pressed or tacked as indicated by marks on pattern, and edge stitched following stitching of lining to sleeve bottom (see operation 21.)	301	OSf-1	12-14	50	50
*6.	Make inside breast pocket.					
	a. Turn under lower raw edge of pocket facing and stitch to inside breast pocket outer ply according to marks on pattern.	301	LSd-1	12-14	50	50
	b. Position combination label on inside of outer ply of inside breast pocket with the top of the label adjacent to the turned facing edge. The label shall face the wearer when worn and shall be centered in pocket opening. Stitch around all sides. As an alternate, the top of the label may be caught in the pocket facing stitch (see 6a). The stitching shall not be through the printing.	301	LSbj-1	10-12	50	50
	c. Position the welt piece on the face side of the left facing, with the outer ply of the pocket on underside (as indicated on the patterns as a solid line for the cut opening for the pocket). Stitch the welt and outer ply of pocket to the facing with two parallel rows of stitching.	301	SSv-2	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	d. Cut opening between the parallel rows of stitching through all plies simultaneously, and notch to ends of each row of stitching. Turn under outer ply of pocketing, welt and facing through the opening and topstitch forming a 1/8 to 3/16 inch welt.	301	SSbe-2(b)	12-14	50	50
	e. Turn in other raw edge of welt and stitch to inner ply of pocketing.	301	SSa-1	12-14	50	50
	f. Raise stitch pocket opening edge (see operation 6e), forming a 1/8 to 3/16 inch welt. Turn pocketing towards armhole.	301	SSbe-2(b)	12-14	50	50
	g. Tack ends of pocket opening 1/4 to 3/8 inch through welt, facing and pocketing.	301		12-14	50	50
	OR					
	h. Operations 6c and 6d above may be accomplished with a double welt pocket machine which stitches, cuts and turns welt edges in one operation. When this machine is used, the welt piece may be trimmed to permit insertion into the machine. The thread shall be in accordance with the machine manufacturer's recommendation.	101 or 301		12-14		
	AND					
	i. Raise stitch the pocket opening. The ends of the pocket opening shall be tacked.	301		12-14	50	50
	j. The finished opening of the inside breast pocket shall be 5-1/2 (+1/4, -1/8) inches.					
*7.	Make lining and assemble facings.					
	a. With face sides together, align notches and stitch center back seam of lining, 1/2 inch from raw edges, ending stitching at the notch which indicates top of vent.	301 or 401	SSa-1	12-14	50 50	50 70
	b. With face sides together, align bottom raw edge of back and front yoke pieces with notches of fleece lining pieces, positioning the top of the yokes towards the bottom of the lining. Stitch 3/8 inch from raw edge of yokes and turn yokes up to finished position.	301 or 401	SSa-1	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
*	c. Stitch yoke to lining, 1/4 inch from raw edge, along shoulders, sides, fronts, around armholes, and at neckline (disregard notches on pattern for pleat and distribute fullness of yoke lining along back neckline on fleece).	301 or 401	SSa-1	10-12	50 50	50 70
	d. Bind the back raw edge of the front facing, bottom coat hem, and left and right vent openings along edges.	301 or 401	BSc-1	12-14	50 50	50 70
	e. Position the back (bound) edge of the facing over the front edge of the front yoke/lining assembly, both parts face up, overlapping 3/4 inch. Stitch the facing to the lining, folding the pocket out of the way and superimposing the stitching on the binding stitch. Distribute fullness of the front yoke/lining assembly over the bust area so the bottom raw edge of the lining finishes 1/2 inch up from the bottom of the facing, with the stitching ending 1-1/4 inches from the bottom of the lining. Fold pocket towards the armhole. No raw edges shall be visible.	301 or 401	LSa-1	12-14	50 50	50 70
	f. With face sides together, stitch side seams of yoke/lining assemblies 1/2 inch from raw edges, matching the bottom turned edges of the yokes within 1/2 inch.	301 or 401	SSa-1	12-14	50 50	50 70
	g. With face sides together, stitch the shoulder seams of the yoke/lining assemblies 3/8 inch from the raw edges.	301 or 401	SSa-1	12-14	50 50	50 70
	h. With face sides together, stitch forearm and backarm sleeve lining seams 3/8 inch from raw edges.	301 or 401	SSa-1	12-14	50 50	50 70
	i. With face sides together, distribute fullness of sleeve linings into lining armhole and stitch 3/8 inch from the raw edge.	301	SSa-1	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
*	j. Center the size label on the face side of the back yoke/lining assembly, with the top edge 2-1/2 (± 1/4) inches below the top raw edge of the neck. Stitch label on all four sides without obscuring the printing. As an alternate, the size label shall be caught between the lining and collar assembly (see operation 20a), centered between the hanger loop.	301	LSbj-1	10-14	50	50
8.	Make front darts and vertical slash pockets.					
*	a. Form and stitch a cut dart in each front as indicated by marks on patterns, using 3/8 inch seam tapered to nothing, 3/8 inch below end of dart.	301	SSa-1	12-14	50	50
	b. Press dart open and flat.					
	c. Each front shall have a double welted beason style pocket. The right front pocket shall include a patch type cash pocket on the inside bottom ply. The napped or pile side of the pocketing shall finish on the inside of the pocket.					
	d. Stitch, face to face, the front pocket welt (Beason) to top ply of pocketing, 3/8 inch from raw edge.	301	SSa-1	12-14	50	50
	NOTE: When automatic pocket welt machine is used, pocketing and beason shall be joined following welting (see operation 8k).					
*	e. Stitch, face side up, the pocket facing to bottom ply of pocketing.	301	LSbj-1	12-14	50	50
*	f. Position the cash pocket on the inside bottom ply of right pocket. Stitch 3/8 inch from the raw edges through all plies of material, the side and bottom edges of the cash pocket.	301 or 401	LSbj-1	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
*NOTE:	The side edge of the cash pocket may be inserted under the front pocket facing during operation 8e.					
*	g. The top edge of the cash pocket shall finish 6 (± 1/4) inches from bottom raw edge of front pocket. The front raw edge of the cash pocket shall finish 2 (± 1/4) inches from front raw edge of front pocket.					
*	h. Both the finished opening and depth of the cash pocket shall be 3-1/2 (± 1/4) inches.					
*	i. Position face side of top ply pocket assembly on the outside of each front as indicated by marks on pattern. Double stitch 3/8 to 1/2 inch gauge and cut midway between the two parallel rows of stitching, tongue notching ends of opening. Turn pocket through opening.	301	SSbe-2(a)	12-14	50	50
	j. Form and top stitch a 3/16 inch wide welt on each side opening, simultaneously catching the facing/bottom ply of pocketing assembly on the underside at the back edge of the opening (nearest side seam). Stitching shall be straight, parallel, and within 1/16 inch of the welt seam. Turn back the bottom ply of pocketing prior to topstitching front edge.	301	SSbe-2(b)	12-14	50	50
	OR					
	As an alternate, opening may be topstitched without simultaneously catching the facing/bottom ply of pocketing assembly. Stitching of assembly to welt area may be accomplished in a separate operation by positioning pocketing assembly on inside and either superimposing stitching on the welt topstitching through all plies, or attaching back edge of the pocketing to the free welt edge.	301		12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	k. Operation 8i may be accomplished with a double welt pocket machine which stitches, cuts, and turns welt edges in one operation. When this machine is used, the beason piece may be trimmed to permit insertion into the machine. The joining seams of the beason piece shall be topstitched through front and all plies of material as in operation 8j. The contractor may utilize the machine manufacturer's recommended pocket stay material.	101 and 301		10-14	30 50	 50
	l. Topstitch the length of the pocket opening on each side 1/2 to 5/8 inch from the pocket opening and parallel to the finished edge of the pocket and the previous row of topstitching. The bottom ply of the pocketing shall be turned back before stitching front edge of pocket. Stitching shall end not more than 1/8 inch beyond ends of pocket.	301	SSv-1	12-14	50	50
*	m. Close pocketing 1/2 to 5/8 inch from inner raw edge, around outer and bottom edges, and up inside edge to bottom of welt catching ends of welt facing and facing pieces.	301	SSa-1	12-14	50	50
*NOTE:	Pocket edges may be staggered up to 1/2 inch.					
	n. Starting at ends of the outermost rows of parallel stitching, stitch uniformly to a point 1 (± 1/8) inch from each end of pocket opening through all plies, catching pocketing at both ends.	301	SSv-1	12-14	50	50
	o. Stitch a single 1 to 1-1/4 inch bartack or two 1/2 to 5/8 inch bartacks perpendicular to the pocket opening at each end of the pocket, connecting the parallel rows of stitching (see figure 2 detail).	Brtck		56 per (1 to 1-1/4") brtck or 28 per (1/2 to 5/8") brtck	30	30
	p. The finished pocket opening shall measure 6-1/4 (± 3/8) inches long.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
*9.	Baste coat fronts to fronts.					
*	a. Make coat front in accordance with 3.3.7.					
*	b. Baste coat front to its respective front as follows: 1. Along center of coat front, catching front of breast pocket. 2. Across shoulder. 3. Around armhole and down back edge. 4. Along breakline of lapel. 5. Down lapel and front edge. 6. Tack the front edge of pockets to coat front.	Hand or Mchne			Comrcl	
	c. Position a 5/8 inch wide bridle stay tape just behind the breakline of each lapel. The bridle stay shall extend sufficiently above gorge to permit catching the stay in the gorge seam tacking and to within 1-1/2 inches of bottom of lapel breakline. Baste tape even and smooth for a distance of 1-1/2 to 2 inches from gorge, then hold tape taut for a distance of 4 to 5 inches to work in not less than 3/8 inch chest fullness. Tape and coat front may be stamp marked with a double line, spaced for proper fullness. When so marked, match the upper mark on the tape with the lower mark on the coat front and evenly distribute the fullness above the marks. The balance of the tape shall be basted without tautness or fullness.	Hand or Mchne			Comrcl	
	d. Pad each lapel of overcoat with not less than seven equally spaced rows of blind stitching. Fullness shall be equally distributed between rows of stitching in order to roll lapel.	103 or 306	SSm-7	4-6	50 50	 50
	e. Blindstitch both edges of bridle stay to coat front.	103 or 306	SSm-2	4-8	50 50	 50
	f. After the lapels are padded, fronts shall be pressed individually on a suitable buck to smooth out excess fullness (see 16a).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
10.	Make backs and form vent.					
	a. Join back pieces 1/2 inch from edge, face to face, to form a center back seam. The bottom of the center back stitching shall terminate 1/2 inch below the top of the vent.	301 or 401	SSa-1	12-14	50	50
	b. Notch top of right vent and press seam open and flat.					
*	c. Stitch a 1/2 inch wide cross-cut tape to back at neckline.	301	SSaa-1	12-14	50	50
*	d. Stitch a 1/4 inch wide woven tape adjacent to the length of the left side of vent at fold.	301	SSaa-1	12-14	50	50
	e. Fold left vent to inside in line with the center back seam and notch and press flat.					
11.	Stitch tapes and join sides.					
	a. Stitch a 1/2 inch wide cross-cut tape to front neck gorge.	301	SSaa-1	12-14	50	50
	b. Stitch a 1/2 inch wide cross-cut tape on each front shoulder 3/4 to 1 inch from gorge to within 1/2 to 3/4 inch from armhole.	301	SSaa-1	12-14	50	50
	c. Stitch a 1/2 inch wide cross-cut tape on front armhole from 2 to 2-1/2 inches of armhole notch to within 1/2 to 3/4 inch from shoulder.	301	SSaa-1	12-14	50	50
	d. Stitch a 1/4 inch wide woven tape to lower part of front armhole from 1 inch of side seam to approximately 3/8 inch beyond cross-cut tape on upper part of front armhole.	301	SSaa-1	12-14	50	50
	e. Stitch, face to face, the fronts and back at sides, 1/2 inch from edge.	301 or 401	SSa-1	12-14	50 50	50 70
	f. Press seams open and flat.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	g. Stitch a 1/4 inch wide woven tape on back armhole 1/2 to 3/4 inch from top of shoulder to approximately one inch in back of side seam, holding tape taut to draw up material and working in proper fullness.	301	SSaa-1	12-14	50	50
NOTE:	As an alternate, armholes may be taped in one operation.					
	h. Press the taped area of the armhole shrinking in fullness.					
12.	Join shoulder seams.					
	a. Join shoulder seams of overcoat, 3/8 inch from edge, evenly distributing fullness on back. The seam should curve slightly towards the front.	301	SSa-1	12-14	50	50
	b. Press shoulder seam open over a suitable block to finish smooth and flat, curving armhole end slightly toward front.					
13.	Make and attach shoulder epaulets.					
	a. With face sides together, stitch shoulder epaulet pieces together 1/4 inch from raw edges, leaving the notched end open for turning.	301 or 401	SSa-2(a)	12-14	50 50	50 70
	b. Trim points, turn and stitch 1/2 inch from forced out edges along the point and sides.	301	SSae-2(b)	12-14	50	50
	c. Make a 7/8 to 1 inch eyelet end, square bar, cut first buttonhole reinforced with gimp in each shoulder epaulet. The center of eyelet shall be 1 inch from pointed end. The buttonhole shall not be off center by more than 1/8 inch. The purling shall be on the top side of the epaulet.	Btnhl	Size btnhl 7/8 - 1	50-54 not incl brtck	30	30
	d. Tack ends of buttonhole stitching and gimp by machine with a 1/4 inch bartack positioned perpendicular and centered to the cut buttonhole.	Bartack		21 per bartack	30	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
*	e. With the shoulder seam and epaulet notch aligned, place the larger portion of the epaulet forward of the shoulder seam, stitch 1/4 inch from raw edge. The point of the epaulet shall be located between the shoulder seam and no more than 1/4 inch forward of the shoulder seam.	301 or 401	SSa-1	12-14	50 50	50 70
14.	Set sleeves, shoulder pads, and sleevehead pads.					
	a. Stitch sleeve to armhole 3/8 inch from the raw edge, easing fullness as indicated on pattern. Ease in fullness of sleeve so that set sleeve in finished overcoat is free of wrinkles or puckering at armhole seam.	301	SSa-1	12-14	50	50
	b. Press fullness of sleeve flat around armhole, taking care not to stretch or distort armhole.					
	c. Baste the shoulder pad to the armhole-sleeve seam outlet, centered over the shoulder seam, with the raw edge of the pad even with the raw edge of the armhole. The shoulder pad shall be attached with no distortion or pleats.	Hand or mchne	SSm-1	2-4		Cmrcl
	d. Tack all around armhole through all plies of material.	301 or hand	SSa-1	4-6	50	50
NOTE:	When armholes are tacked by machine, a loose but properly formed and elastic stitch may be used. When armholes are tacked by hand, tacking shall be backstitched every other stitch from front notch to side (underarm) seam across top of armhole.					
	e. Trim away excess interlining, canvas, and shoulder pad to 3/8 inch from armhole seam.					
	f. Tack the sleevehead pad to the armhole seam outlet from the lower front armhole notch to the back seam of the sleeve, adjacent to, but not beyond the armhole-sleeve joining seam, through all plies. The row of stitching shall start and finish no less than 1 inch beyond the length of the sleevehead.	301	SSa-1	4-6	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
NOTE:	The shoulder pad may be simultaneously tacked with the sleevehead.					
*	g. Insert round edge of shoulder pad between coat front interlining.					
*15.	Finish vent corner.					
	a. Turn up bottom hem at left vent edge, face to face, according to the 1-1/4 inch hem indicated and seam along the inner side of the folded vent edge. Trim excess material to eliminate bulk and turn back to finished position forming a square corner, with the seam hidden on the underside of the turnup, without twisting or distortion.	301	SSa-1	12-14	50	50
16.	Shape fronts.					
*	a. Press front edge, lapel and chest of right and left fronts individually on a suitably shaped pressing block conforming to the shape of the body. (If not previously accomplished, see 9f.)					
	b. Mark and shape lapels in accordance with lapel shaper.					
*	c. Trim lapel, front, and bottom edges of facing, matching vent lengths.					
*	d. Trimming of lapel, front, and bottom edges of facing may be performed simultaneously with taping of front edges.					
	e. Trim interlining 1/4 to 3/8 inch back from top and front edges of lapel and fronts.					
17.	Join facings and fronts with tape.					
	a. With face sides together, baste facings with attached linings to fronts, putting in proper lapel and chest fullness.	Hand or Mchne			Comrcl	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	b. Join the facings and fronts together with a 1/2 inch wide woven tape 1/8 to 3/16 inch from edges. The tape shall extend from 1/2 inch in back of lapel notch, down front and across bottom of overcoat extending not less than 3 inches beyond back edge of facing.	301	SSab-1 and LSbj-1	12-14	50	50
	c. Blindstitch back edge of tape to edge of coat front interlining from top of lapel (notch) to bottom of coat.	103 or 306	SSm-1	4-6	50 50	 50
NOTE:	As an alternate to operations b. and c., a 5/8 inch fusible tape may be used in lieu of the 1/2 inch woven tape. When this method is used, the tape shall be fused to the interlining and the back edge in lieu of blindstitching.					
	d. Press front edges flat and smooth removing fullness.					
*	e. Remove all basting stitches, trim lower front corner of facings, corners of lapels, gorge seam, and notch lapels for proper turning.					
	f. Spread open the front facing seam from lapel notch to bottom edge of overcoat and press smooth and flat.					
18.	Make vent.					
*	a. Fold the edge of the right vent lining 1/4 to 3/8 inch, and align it 1/4 inch from the bound edge of coat vent. Stitch 1/16 to 1/8 inch along the folded edge of lining. The bottom raw edge of the fleece lining shall end about 1/8 inch above the folded hem with the row of stitching starting at the top of the vent opening, and ending at the bottom folded edge of the turnup.	301	SSb-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
*	b. Lap the bound edge of the left wool vent over the lining, both parts face up, positioning the top of the wool vent at the top of the lining vent opening. Topstitch the wool vent to the lining, with the row of stitching superimposed on the binding stitching. The bottom raw edge of the vent lining shall be inserted within the pre-finished corner, and end inside the folded bottom edge. Only the wool vent outlet and vent edge of the lining shall be stitched together, and care shall be taken to avoid twisting or puckering. Lining shall lay smooth with no distortion around, or bunching in the vent or corner of hem. Excess lining material may be trimmed.	301	LSa-1	12-14	50	50
*19.	Baste front and bottom edges.					
	a. Turn facings to finished position, rolling seam slightly to the underside in the lapel area, and to the inside along the front edge, and baste along front and bottom edges.	Hand or Mchne				
	b. Trim facing at gorge even with outershell.					
20.	Set collar.					
*	a. Stitch topcollar to front facing at gorge to a point not less than 1 inch back of lapel breakline. Notch seam allowance of gorge facing at end of stitching. Spread gorge seam open and tack, catching bridle tape and canvas interlining in the tacking and continue stitching topcollar to neckline across front facing and back through all plies of material 3/8 inch from edge positioning ends of hanger loop, centered at center back (± 1/2 inch). The finished hanger loop opening shall measure 2 to 2-1/2 inches. As an alternate, the size label shall be caught between the lining and collar assembly (see operation 7j), centered between the hanger loop.	301	SSa-1	12-14	50	50
*	b. Baste undercollar to neckline of collar with center seam of undercollar matching center back seam, using a 5/8 inch seam allowance. The basting shall put proper fullness over the shoulder.	Hand or Mchne	LSa-1		Comrcl	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
*	c. Fell edge of undercollar to neckline and securely hand tack corners of undercollar to lapel at notch. The raw edge of the undercollar shall be enclosed within the felling.	Hand or Mchne Hand type		8-10 6-8	See 3.3.9.3	
*	d. The finished topcollar shall measure 2-3/4 (± 1/4) inches wide at center back (measured from breakline to collar edge).					
*	e. The width of the collar stand from the finished edge of neckline to the breakline of topcollar shall be 1-1/4 (± 1/16) inches wide at center back.					
	f. The collar and lapel shall be equal in length at the notch.					
21.	Join sleeve bottoms and tack linings.					
	a. With face sides together, stitch 1/2 inch from the raw edges along the bottom of the wool sleeve and sleeve lining, matching the forearm and backarm seams.	301	SSa-1	12-14	50	50
	b. Tack the sleeve lining to the wool sleeve approximately 2 inches from the turned up raw edge of the wool sleeve, at the forearm and backarm seam allowances. The sleeve lining shall be tacked to the wool sleeve for a length of not less than 6 inches, and shall be positioned with sufficient fullness below the tack to provide approximately 1/4 inch bellows at the bottom of the finished sleeve lining, and leaving sufficient lining above the tack to prevent the lining from pulling or distorting the wool sleeve.	301 or hand	SSa-1	8-10	50 or cmrcl	50
	c. Tack the armhole seam outlets of the wool and lining together for a distance of not less than 2 inches, approximately centered over and matching the shoulder seams. The tacking shall be positioned as close to the sleevehead tacking as possible and shall be free of twisting or distortion.	301 or hand	SSa-1	8-10	50 or cmrcl	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
22.	Complete edgestitching and vent.					
	a. Continuously edgestitch along the collar, lapel, fronts, and bottom of the facing, 1/2 inch from the forced-out, basted, folded edge. The lapel topstitching shall form a right angle at the base of collar notch, extend 5/8 inch along gorge seamline and continue around collar at 1/2 inch gauge (see figure 3). Turn up the bottom edge of the coat 1-1/8 to 1-1/4 inches over bottom raw edge of the lining. Continue edgestitching 1/2 inch gauge, creating a right angle step up to the bound hem edge on the inside edge of the facing, with the stitching superimposed on the binding at the back edge of the facing. Continue stitching around the bottom of the overcoat on the binding, catching the bottom of the lining in the stitching. The lining shall be slightly full, but shall not fold over itself or over the bound hem edge in the finished coat. The hem shall be even and smooth with no twisting or distortion. The lining shall not be bunched in the hem. Continue edgestitching up the left vent, 1/2 inch from the folded edge, terminating at the top of the vent.	301	SSae-2(b) and smlr to SSbc-1	12-14	50	50
*	b. Form two parallel, diagonal rows of stitching, through all plies at the top of the left vent positioned diagonal to center back seam (approximately 80 degrees) with the ends of the parallel stitching inclined towards the front and bottom of the overcoat. The finished parallel rows shall measure 2 (± 1/4) inches long, and 1/2 (± 1/8) inch apart. The bottom row of stitching shall cover the top of the vent edgestitching which shall not extend beyond the lower row of stitching by more than 2 stitches. OR As an alternate, a parallelogram may be used with the same measurements as stated above.	301	SSv-2	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
23.	Mark and stitch buttonholes.					
	a. Press lapel and front edges prior to marking and making buttonholes.					
	b. All buttonholes shall be eyelet end, square bar, cut first, and reinforced with gimp with the stitching securely caught in the fabric. The buttonholes shall be clean and correctly positioned with the purling finishing on the outside. Buttonhole gimp shall be pulled through to the underside. The ends of all buttonholes shall be securely tacked, catching the ends of the gimp, and of sufficient width to cover the bar. The tack shall be perpendicular and centered with respect to the cut in the buttonhole.					
	c. The inside purled eyelet edge on front and lapel buttonholes shall be 3/4 (+ 1/8) inch from the finished edge, vertically aligned, and equally spaced.					
*	d. Mark and stitch as indicated by marks on pattern, three 1-1/4 to 1-3/8 inches horizontal buttonholes on the right front, and one on the left front to correspond with the center button on the right front. Mark and stitch the same size buttonhole on each lapel, parallel to and 1-1/2 (+ 1/8) inches from the finished top edge of the lapel. The purling of the lapel buttonholes shall finish on the outside of the lapel. The purling of the other front buttonholes shall finish on the outside of the fronts.	Btnhl	Size Btnhl 1-1/4 to 1-3/8	70-75 not incl brtck	30	30
	e. Tack the ends of each buttonhole as indicated in operation 23.b. The buttonhole tacking may be performed by hand, separate machine, or with a machine which makes the buttonhole and bartacks in one operation.	Brtck or hand		21-22 per brtck 10-14 per brtck	30 30	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
24.	Cleaning.				
	a. Remove all basting threads.				
	b. All ends of stitching shall be trimmed and loose threads removed from the overcoat.				
	c. All spots, stains, and marking tickets shall be removed without injury to the material.				
*	d. Attach removable size ticket to outside of lower left sleeve.	Hand or Machine		2-4 stches/tack 6-8 stches/tack	
25.	Pressing.				
	Finished appearance. Edges of the collar, lapels, fronts and bottoms shall be smooth and flat. Shoulders shall be molded and shaped to body contours with no excess fullness. The fronts, sides and backs shall be smooth and flat with no excess fullness. The left vent shall lap smoothly over the right with no distortion or pressing impressions at the back of the overcoat. Fullness in the tops of the sleeves shall be shrunk in. Sleeves shall roll smoothly with no breaks, twists, or creases. The collar breakline shall be maintained with a soft crease and the collar edges shall be shaped and stretched over the shoulders. Lapel notches (gap between top edge of lapels and collar ends) shall be uniform. The break line crease shall not be more than 2 inches down from gorge seam into the lapel. The remaining lapel shall roll at the breakline. Fullness (shaping) over topcollar, lapel facing and the lower right coat front shall be maintained so that they roll inward, allowing their edges to rest against the body of the overcoat. The collar and lapels shall finish uniform and in accordance with the finished collar and lapel shapers.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
	a. Press the edge of lapels, fronts, collar, and bottom of the overcoat on edge pressing machine.				
	b. Press entire body of overcoat on suitable pressing machine.				
	c. Roll press sleeves.				
	d. Press collar on suitable collar pressing machine stretching outer edge of collar over shoulder area.				
	e. Press armholes and shoulders on armhole or shoulder machine.				
	f. Press armhole solid from the inside, creasing the armhole from not less than 1/2 inch above the backarm seam to not less than 4 inches from the front shoulder seam. The armpit and back of the armhole shall be held short and pressed flat.				
	g. Press lapels. The lapels shall be soft creased from the breakline of the collar, and roll pressed from midway between the gorge seam to the bottom of the lapel.				
	h. Block armholes and shrink topsleeve with suitable pressing machine.				
26.	Finish pressing.				
	a. Press yoke smooth and flat with a hand iron.				
	b. Touch up any area missed by hand or machine pressing.				
	c. Remove gloss, creases, and all pressing impressions.				
	d. Place overcoat on hanger until thoroughly dry.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
27.	Mark and sew buttons.					
*	a. Plastic anchor design buttons shall be sewn with the anchor in an upright position. The stitching of the button shall fall in the groves provided in the button except for the one cross-over stitch. Align buttons with the corresponding buttonholes. No bulging or distortion shall occur when fronts, necks and epaulets are buttoned.					
*	b. In addition to the number of stitches required for sewing on buttons, hand or machine sewn buttons on left front and the hidden button used to anchor left front to inside, and the shoulder buttons shall have the thread tightly wrapped by hand or machine not less than four times around to form a 1/8 to 3/8 inch shank. Thread ends on all buttons shall be hidden and securely tied off with not less than 2 stitches.					
	c. Sew six 50 ligne anchor buttons; three on each front as follows:			Stchs per button		
	(1) Top button - through all plies. (Breast pocket shall not be caught in stitching).	Hand or 101 or 301		4 (dbl thread)	12/4 or 16/4	
				22-24	20/4	
	(2) Center button - lower ply of pocketing and plies of inside breast pocket shall not be caught in button stitching.			14-16	20/4	
	(3) Bottom button - catch top ply of front pocketing, front, and interlining only.					
	Center of each button shall be sewn 4 (± 1/4) inches from the finished front edge and shall smoothly align with the buttonholes.					
	d. Sew one 50 ligne anchor button on left front lapel through facing and smoothly align with lapel buttonhole.		- as above -			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF OVERCOAT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
	e. Sew one hidden button on right front directly under the outside center button, catching the inner ply of the pocketing.		- as above -		
	f. Sew one 30 ligne button on each shoulder to align with epaulet buttonhole without distortion.		- as above -		

Source: https://assist.dla.mil -- Downloaded: 20261O-20T03:01Z
Check the source to verify that this is the currentversion before use.

3.8 Sizes and measurements. Finished measurements shall be as shown in Table III. All measurements and tolerances are expressed in inches.

Table III - Sizes and Measurements.

Size	(A) Bust	(B) Sleeve Inseam Length Short	Regular	Long	(C) Center Back Length Short	Regular	Long
6	44	16	17	18	26-3/4	28-1/4	30-1/4
8	45	16	17	18	27	28-1/2	30-1/2
10	46	16	17	18	27-1/4	28-3/4	30-3/4
12	47-1/2	16	17	18	27-1/2	29	31
14	49	16	17	18	27-3/4	29-1/4	31-1/4
16	50-1/2	16	17	18	28	29-1/2	31-1/2
18	52-1/2	16	17	18	28-1/4	29-3/4	31-3/4
20	54-1/2	16	17	18	28-1/2	30	32
38	56-1/2	16	17	18	28-3/4	30-1/4	32-1/4
40	58-1/2	16	17	18	29	30-1/2	32-1/2
42	60-1/2	16	17	18	29-1/4	30-3/4	32-3/4
44	62-1/2	16	17	18	29-1/2	31	33
Tolerance	± 1	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

NOTE: Refer to figure 1 for A, B, and C measurements.

(A) Bust - Twice the measurement taken along the base of armhole from left front edge to center back seam with the overcoat laid out open and flat.

(B) Sleeve inseam length - Measurement shall be taken along sleeve inseam from base of armhole to bottom of sleeve.

(C) Center back length - Measurement shall be taken from the neckline seam to bottom edge of overcoat.

3.9 Workmanship. The finished overcoat shall conform to the quality of product established by this specification. As a final step in the contractor's production control plan, before formation of a lot, each overcoat shall be buttoned on a model form and examined for selected defects. An overcoat containing a selected defect shall not be included in the end item lot. Selected defects are those defects identified by an asterisk (*) in the classification column of Table V and listed individually in Table VI. The occurrence of major and minor defects shall not exceed the applicable quality levels.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected as specified for compliance with design, construction, workmanship, appearance, and dimensional requirements.

* 4.4 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

* 4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition, a certificate of compliance shall be furnished for the resin treatment requirements of 3.3.10.2 and the fusible tape requirements of 3.3.10.3. In addition, the cotton flannel (3.3.4.2) and the cotton braid (3.3.12) shall be tested for the characteristics specified in Table IV and in accordance with the referenced test methods of FED-STD-191 whenever applicable. The sample unit for the cotton flannel shall be 2 yards, and the sample unit for the cotton braid shall be 1/2 yard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table IV - Test Methods

Component	Characteristic	Requirement Paragraph	Test Method
Cotton Flannel	Weight	3.3.4.2	5041 1/
	Yarns per inch		
	Warp	3.3.4.2	5050 1/
	Filling	3.3.4.2	5050 1/
	Breaking strength		
	Warp	3.3.4.2	5100 1/
	Filling	3.3.4.2	5100 1/
	Colorfastness to Crocking	3.3.4.2	AATCC 8-1988 1/
	Colorfastness to Wet-Dry Cleaning	3.3.4.2	5622
Cotton Braid	Colorfastness to Crocking	3.3.12	AATCC 8-1988 1/
	Colorfastness to Wet-Dry Cleaning	3.3.12	5622

1/ A certificate of compliance may be substituted and will be acceptable for the stated requirements.

* 4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The sample unit shall be one finished overcoat. The lot size shall be expressed in units of overcoats.

* 4.4.2.1 Visual examination. The overcoats shall be examined for defects in shade, design, material, construction, and workmanship and the defects classified in accordance with Tables V and VI. Each overcoat shall be buttoned on a model form and examined for defects X through XXX in Table V.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T03:01Z
Check the source to verify that this is the currentversion before use.

Table V - Classification of defects

Defect	Classification Major	Minor A	Minor B
A. GENERAL DEFECTS			
I. MATERIAL DEFECT AND WORKMANSHIP DAMAGE			
a. Hole, cut, tear, smash, mend, burn, scorched area, or open place:			
1. On outside	X		
2. On inside, lining or yoke (longest dimension in any direction):			
(a) -up to 1/4 inch inclusive			X
(b) -more than 1/4 inch		X	
b. Loose yarn, snagged thread, misweave, area of no dye penetration, dye streak, missing yarn, broken yarn, thin place, shade bar or woven in waste; more than 1/4 inch (largest dimension in any direction):			
1. On outside		X	
2. On inside, lining or yoke			X
c. Permanent fold, pleat, or crease in cloth (when caught in seaming or stitching):			
1. On outside	X		
2. On inside, lining or yoke			X
d. Needle chew on outside:			
1. Up to 1/4 inch inclusive		X	
2. More than 1/4 inch	X		
e. Knot or slub on outside		X	
II SHADED PART			
a. On outside:			
1. Any part shaded (except parts which may be cut ends)	X		
2. Variation in shade within a part (except parts which may be cut from ends)	X		
3. Part cut from ends badly shaded			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Defect	Classification Major	Minor A	Minor B
b. On inside or liner:			
1. Any part badly shaded (except sleeve linings)			X
2. Sleeve lining part badly shaded, pairs not matching each other			X
III PRESSING			
a. Omitted or poorly pressed (unless otherwise classified)		X	
b. Excess gloss on edges of seamlines			X
c. Lapel, front or collar edge bulky, or not pressed solid			X
d. Lapels not roll pressed			X
e. Armhole seam not pressed open across top		X	
f. Wrinkle, crease or basting thread or ticket impression not removed			X
g. Sleeve not roll pressed		X	
h. One or more sleeve seams not pressed open		X	
i. Armhole stretched	X		
j. Collar breakline not creased as specified			X
k. Armhole not blocked or poorly blocked			X
l. Front darts not pressed smooth and flat			X
m. Pressing impressions under lapels, collar, pocket welts and vent not removed			X
n. One or more seams not pressed open		X	
IV CLEANNESS			
a. Any spot or stain on outside (visible at 2 feet) (largest dimension in any direction):			
1. Up to 3/8 inch inclusive			X
2. More than 3/8 inch up to 3/4 inch inclusive		X	
3. More than 3/4 inch	X		
b. Any size or shade marking exposed or visible on outside	X		
c. More than 3 thread ends not trimmed to 1/4 inch or less on outside		X	
d. More than 5 thread ends not trimmed to 1/4 inch or less on inside			X
e. Two or more shade, size, or marking tickets not removed			X
f. Basting thread (including monofilament thread or fragments of monofilament thread) not completely removed from outside			X
g. Loose thread ends not removed			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Defect	Classification Major	Minor A	Minor B
V COMPONENT AND ASSEMBLY			
a. Any component part or operation omitted (unless otherwise classified herein)	X		
b. Any component not as specified (type, size, color, etc)	X		
c. Any component part tight, twisted, distorted, pleated or full (unless otherwise classified herein)	X		
d. Any operation not as specified (unless otherwise classified herein)	X		
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein)		X	
f. Any outside component part not cut in the same direction of nap	X		
g. Any outside parts assembled with the face side on the underside (unless otherwise specified)	X		
VI CUTTING			
a. Any component part not cut in accordance with specified pattern, directional lines on pattern or not in accordance with specification requirements	X		
VII SEAM AND STITCHING			
a. Accuracy of seaming:			
1. Seam puckered, pleated or twisted on outside (unless otherwise classified herein)	X		
2. Seam irregular or wavy (unless otherwise classified herein)	X		
3. Part of overcoat caught in any unrelated operation or stitching	X		
4. Machine felling, hand felling, inside stitching or blindstitching exposed on outside			X
5. End of stitching when not caught in another seam or stitching not finished as specified		X	
6. Stitching overlapping end of thread break less than 1/2 inch		X	
7. End of a continuous line of stitching overlapped less than 1/2 inch (except labels)		X	
8. Not specified color thread used on outside		X	
9. Needle perforations visible on outside		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Defect	Classification Major	Minor A	Minor B
b. Gage of stitching and seam allowance:			
1. Edge, top or raised stitching sewn too close to edge resulting in damage to cloth	X		
2. Width of seam allowance not as specified by 1/16 inch or more (score only when condition exists on more than 1/2 the length of the seam)		X	
3. Stitching irregular or not within range specified or varies more than 1/16 inch when no range is specified (score only when condition exists on more than 1/2 the length of the seam)			X
c. Open seam:			
1. On outside (excluding lower raw edge of undercollar):			
(a) More than 1/2 inch	X		
(b) More than 1/4 inch up to 1/2 inch inclusive		X	
(c) Up to 1/4 inch inclusive			X
2. Lower raw edge of undercollar not enclosed within felling stitching up to 1/2 inch			X
3. On inside: machine felling and hand felling (other than hand felling around armhole):			
(a) More than 3/8 inch up to 1 inch inclusive			X
(b) More than 1 inch		X	
4. On inside: stitch type 301 and hand felling around armhole:			
(a) Up to 2 inches inclusive			X
(b) More than 2 inches		X	
d. Raw edge			
1. On outside (excluding permitted raw edges):			
(a) Up to 1/8 inch inclusive			X
(b) More than 1/8 inch up to 1/2 inch inclusive		X	
(c) More than 1/2 inch	X		
2. On inside:			
(a) 3/8 inch up to 1 inch inclusive			X
(b) More than 1 inch		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Defect	Classification Major	Minor A	Minor B
e. Seam and stitch type:			
1. Not specified seam or stitch type	X		
2. Any line of stitching omitted or insecure		X	
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)			X
4. Looper thread of 401 stitch type on outside	X		
5. Direction of seam not as specified		X	
f. Stitch tension:			
1. Loose tension resulting in a loose seam:			
(a) Up to 1/2 inch inclusive			X
(b) More than 1/2 inch up to 3/4 inch inclusive		X	
(c) More than 3/4 inch	X		
2. Loosely exposed loops of lower or top thread on edge, top or raised stitching		X	
3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X		
g. Stitches per inch (score only when condition exists on more than 1/2 the length of seam):			
1. More than the maximum specified			X
2. Less than the minimum specified:			
(a) By one or two stitches			X
(b) By three or more stitches		X	
h. Runoff, skipped or broken stitch:			
1. Joining seam - use open seam classification		-	
2. Edge, top or raise stitching more than 1/4 inch			X
i. Bartack, backtack, tack or tacking (except buttonhole bartack):			
1. Missing, insecure, misplaced, not serving intended purpose or not specified size or type			X
2. Loose stitch tension			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Defect	Classification Major	Minor A	Minor B
VIII BUTTONHOLE			
a. Misplaced or not positioned as specified	X		
b. Omitted, added, not specified type or not finished as specified	X		
c. Gimp omitted; uncut, finished length not as specified or end of gimp not pulled through to underside of cut first square bar buttonhole		X	
d. Ragged edge (i.e, yarn or thread ends on inside of buttonhole not trimmed to less than 1/4 inch), incomplete stitching, stitching not securely caught in fabric, bulky appearance or stitches not uniformly spaced		X	
e. Broken stitch, or two or more skipped stitches		X	
f. Buttonhole stitching extending beyond bartack		X	
g. Bartack missing, loose or misplaced (not serving intended purpose)		X	
h. Stitches per buttonhole or bartack less than specified minimum number by:			
1. One to three stitches			X
2. Four or more stitches		X	
i. Purling not finishing on the side specified			X
IX BUTTONS			
a. Omitted, broken or defective		X	
b. Part of garment pleated or puckered by button sewing			X
c. Misplaced, loose, not attached as specified or insecurely sewn			X
d. Tacking stitches omitted or insecure (hand sewn)			X
e. Button sewn with insignia in other than specified direction			X
f. Shank wrapping (when required) omitted, loosely or insecurely wrapped or not specified shank length		X	
g. Stitching on button not locked at end of cycle (tug at loose end of the thread when accessible to determine whether it will ravel)			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Defect	Classification Major	Minor A	Minor B
B. DETAILED DEFECTS (OVERCOAT BUTTONED ON FORM)			
X ALIGNMENT OF BUTTONS (INCLUDING ANCHOR BUTTON) AND BUTTONHOLES			
a. Not aligned, causing a bulge or twist when buttoned:			
1. On front		X	
2. On epaulet			X
b. Spacing between front buttonholes varying more than 1/4 inch			X
c. Button on right front not in horizontal alignment with corresponding button on left front by:			
1. More than 1/2 inch but not more than 1 inch inclusive		X	
2. More than 1 inch	X		
XI COLLAR (construction and setting)			
a. Collar setting:			
1. Short, i.e., causing puckers on back or front along edge of collar pulling lapel breakline causing front to roll out	X		
2. Long, i.e., setting away from neck, collar not fitting neck or lapel rolling higher than 2 inches above top front button or buttonhole when measured along front edge.	X		
3. Collar not properly set, causing a decided curve or bulge on creaseline at joining to gorge seam	X		
4. Tight at joining to gorge seam of front or facing or undercollar across back causing fullness on lapel or fullness or pleat across outside of back		X	
5. Collar off center by more than 1/4 inch with shoulder seams matching		X	
b. Collar edge:			
1. Collar edge short across shoulders, causing collar to rise above creaseline by:			
(a) More than 1/4 inch to 1/2 inch inclusive		X	
(b) More than 1/2 inch	X		
2. Irregular or wavy			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Defect	Classification Major	Minor A	Minor B
3. Outer edge of undercollar exposed beyond outer edge of topcollar (score only when the condition exists on more than 1/2 the length of seam)		X	
4. Undercollar edge more than 1/8 inch from topcollar edge (score only when the condition exists on more than 1/2 the length of seam)			X
c. Topcollar:			
1. Tight, i.e., causing edges to curl or bulge on undercollar		X	
2. Twisted, i.e., having a diagonal twist	X		
3. Full, i.e., having puckers or pleats	X		
4. Full, i.e, topcollar folds 1/8 inch or more above creased edge or breakline of undercollar		X	
5. Finished collar width at center back not as specified (measure from fold to outer edge of topcollar)		X	
d. Undercollar:			
1. Interlining pleated, affecting smoothness of topcollar	X		
2. Interlining tight or twisted, causing puckers on undercollar		X	
3. Tight at joining to fronts or back causing puckers or pleats at neck	X		
4. Center seam from center back seam:			
(a) 1/4 inch or more but not more than 3/8 inch			X
(b) More than 3/8 inch		X	
5. Tacking on corners of undercollar to fronts omitted or insecure			X
6. Undercollar lower raw edge stitching not uniform for more than 3/4 inch			X
7. Repair of undercollar lower raw edge stitching not accomplished neatly		X	
8. Bottom edge of undercollar exposed beyond collar edge		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Defect	Classification Major	Minor A	Minor B
e. Gorge seam:			
1. Not straight		X	
2. Any portion of seam not spread open		X	
3. Back end of seam not back of or is less than 1 inch back of lapel breakline		X	
4. Length of seam outside not uniform with other side by 3/8 inch or more (measured from collar breakline to end of gorge seam at notch)			X
5. Tacking or gorge seam omitted or insecure			X
XII LAPEL AND COLLAR			
a. Lapel facings			
1. Twisted, short or tight, causing lapel to curl out or twist	X		
2. Fullness, pleat or puckers	X		
3. Fullness (not smooth and flat)		X	
b. Lapel edges:			
1. Irregular, wavy, or not properly forced out		X	
2. Front part of overcoat exposed on lapel edge		X	
3. Tape set on too tight causing puckering at edges		X	
c. Bridle tape:			
1. Misplaced, not serving intended purpose		X	
2. Loose, causing breakline not to lie flat		X	
3. Tight, causing puckers or pleats along breakline	X		
d. Lapel and collar shapes (ends, points, and steps):			
1. Twisted, short or tight causing collar or lapel to curl out		*	
2. Misshapen or distorted - any point varying from finished shaper by:			
(a) 1/4 inch or more but less than 1/2 inch	X		
(b) 1/2 inch or more		*	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Defect	Classification Major	Minor A	Minor B
3. Not uniform in size or shape, varying from matching part by:			
(a) 1/4 inch or more but less than 1/2 inch		X	
(b) 1/2 inch or more		*	
4. Matching parts uniform but varying from finished pattern shaper by:			
(a) 1/4 inch or more but not more than 3/8 inch			X
(b) more than 3/8 inch		X	
5. Gap between top edge of lapels and ends of collar not uniform with other side by 1/4 inch or more	X		
XIII LENGTH OF BUTTONED FRONTS			
a. Right front shorter than left front at bottom corner by:			
1. More than 1/4 inch to 1/2 inch inclusive			X
2. More than 1/2 inch		X	
b. Right front bottom corner longer than left front at bottom by more than 1/2 inch			X
c. Bottom corner of left front exposed below bottom edge of right front by:			
1. More than 1/2 inch to 1/2 inch inclusive			X
2. More than 1/2 inch		X	
d. Fronts uneven at neck when buttoned by more than 1/4 inch		X	
XIV CONSTRUCTION OF FRONTS			
a. Fronts not properly shaped or constructed causing right front to swing to the right or left by more than 2 inches when buttoned from an imaginary perpendicular line drawn from forward edge of top button to bottom of overcoat. (Measure horizontally at bottom of overcoat from imaginary line to front edge of left front.)		X	
b. Right front rolling outward below bottom front button, when buttoned		X	
c. Fronts puckered, twisted or not smooth, having a wavy appearance	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Defect	Classification Major	Minor A	Minor B
XV FRONT FACINGS			
a. Short, tight, or twisted, causing puckers or twist on fronts or back	X		
b. Front facing long causing bottom corner of front to curl up	X		
c. Front facing exposed along edge of right front			X
d. Fullness on facing between buttons and buttonholes or between buttonholes or buttons and front edge			X
e. Tacking of seam joining front edge of front lining and lining strip to interlining omitted or insecure		X	
XVI POCKETS AND WELTS			
a. Poorly shaped or not uniform in shape or size by more than 1/4 inch with corresponding point on matching part		X	
b. Irregular in width by 3/16 inch or more		X	
c. Notch exposed at end of welt or raw edge at corner	X		
d. Out of horizontal alignment by:			
1. More than 1/2 inch to 3/4 inch inclusive		X	
2. More than 3/4 inch to 1 inch inclusive	X		
3. More than 1 inch		*	
e. Finished length or width not as specified		X	
f. Front at corner of pocket opening pleated or distorted		X	
g. Top back edge of welt not equidistant from side seam by more than 3/4 inch		X	
h. Welt misplaced, i.e., right welt on left front and left welt on right front	X		
i. Back edge of welt short, causing puckers on front or too loose causing welt to gap		X	
j. Tape, reinforcement piece or interlining omitted		X	
k. Tape stitching exposed and visible on outside			X
l. Front under width of welt at one or both ends puckered or pleated			X
m. Reinforcing or diagonal row of stitching on corners of welt, omitted or insecure		X	
n. Topstitching along welt crooked, not parallel to pocket or misplaced			X
o. Decorative stitching at welt ends of outside pockets missing, misplaced or not as specified		X	
p. Pocket seam allowance not stitched or tacked to interlining as specified; tacking omitted or insecure		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Defect	Classification Major	Minor A	Minor B
XVII SHOULDER			
a. Construction:			
1. Improperly joined or set causing front or back of shoulder to twist	X		
2. Shoulder seam curved towards back at armhole seam in lieu of toward the front:			
(a) 3/16 inch to 3/8 inch inclusive			X
(b) More than 3/8 inch		X	
3. One or both shoulder seams not pressed open			X
b. Shoulder pad:			
1. Not properly set causing shoulder or shoulder lining to twist, pucker or bulge	X		
2. Misplaced, not serving intended purpose, i.e., too far back or too far forward, not completely or securely caught in armhole tacking		X	
3. Neck end of shoulder pad not tacked to shoulder seam allowance as specified			X
c. Shoulder epaulet (construction and setting):			
1. Poorly shaped or not of uniform shape or size		X	
2. Epaulet will not lie flat, twists or bulges when buttoned		X	
3. Pointed end not specified distance from undercollar joining seam		X	
4. Misplaced so that shoulder seam is exposed	X		
5. Set with seam on the underside	X		
6. Length or width not as specified		X	
7. Not uniformly placed, one epaulet is further forward or back from position of other epaulet by 1/4 inch or more		X	
8. Back edge of epaulet at neck edge more than specified distance beyond shoulder seam			X
9. Back edge of epaulet not specified distance from shoulder seam at armhole			X
10. Omitted or insecurely attached	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Defect	Classification Major	Minor A	Minor B
XVIII ARMHOLE			
a. Armhole not completely tacked or not tacked as specified		X	
b. Stretched causing excessive fullness on back between shoulder and underarm		X	
c. Crooked or puckered seam		X	
d. Tape around armhole omitted	X		
e. Tape set too tight, causing puckering around armhole	X		
f. Tape stitching exposed and visible on outside (score only when condition exists on more than 1/2 the length of seam)		X	
XIX SLEEVE HEAD WADDING			
a. Not completely or insecurely tacked		X	
b. Misplaced, not serving intended purpose		X	
XX SLEEVE			
a. Set improperly, causing sleeve to break or twist		*	
b. Fullness misplaced		X	
c. Tight at armholes, i.e., roll effect not present on front or back of sleeves or causing fold of undersleeve or on armhole at base of sleeve	X		
d. Lower part of top sleeve tight causing front of sleeve not to roll	X		
e. Front edge of sleeve either too far front or too far back when measured from lower end of pocket opening by 1-1/2 inches or more	X		
f. Setting of sleeves within above tolerances but hanging in opposite directions, one sleeve too far forward and one sleeve too far back from above set points of measurement of pockets. A tolerance of not more than 1-1/4 inches is allowed for position of each sleeve		X	
g. Sleeve backarm seam not equidistant from shoulder seam by 1/2 inch or more		X	
h. Underarm seam staggered more than 1/2 inch with side seam at armhole			X
i. Wigan twisted, tight or pleated causing puckering on outside of sleeve, clearly noticeable		X	
j. Bottom edge of sleeve uneven by:			
1. 1/4 inch to 3/8 inch inclusive			X
2. More than 3/8 inch		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Defect		Classification Major	Minor A	Minor B
	k. Bottom edge of wigan not extending to bottom edge of sleeve by more than 1/8 inch or blindstitch tacking on bottom turn-up to wigan omitted or insecure		X	
	l. Wigan tight, twisted or pleated causing puckering on outside of sleeve, clearly noticeable		X	
	m. Bottom edge of wigan not extending to bottom edge of sleeve by more than 1/8 inch or blindstitching, tacking on bottom turn-up to wigan omitted or insure		X	
XXI	FRONT AND BOTTOM EDGES			
	a. Front edge stretched		X	
	b. Tape set too tight causing puckering on front or bottom edge		X	
	c. Front edge irregular, bulky, or not fully forced out		X	
	d. Bottom corner or right front poorly shaped			X
	e. Bottom edge stretched or uneven			X
	f. Stitching along bottom edge exposed on outside			X
	g. Facing exposed on left or right edge (to be scored only when the condition exists along major portion of seam)		X	
XXII	FITTING			
	a. Fitting of body lining, front interlining, and liner tight, short or twisted causing puckers or twist on outside	X		
	b. Canvas front too full, causing front to have a wavy appearance or not lie smoothly	X		
XXIII	VENT			
	a. Stay tape on inside of left vent omitted		X	
	b. Finished length or width of vent not as specified			X
	c. Diagonal rows of stitching across top of vent opening omitted, insecure or not as specified		X	
	d. Stitching on back seam extends more than 1/2 inch below diagonal row of stitching on back			X
	e. Turn-back of left vent irregular in width by 1/4 inch or more			X
	f. Not lapped in direction specified		X	
	g. Outer vent edge stretched or not properly constructed causing vents to open		X	
	h. Lining or stay tape tight, short or twisted causing puckers on vent edge		X	
	i. Outer vent edge irregular		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

levels

Table V - Classification of defects

Defect		Classification Major	Minor A	Minor B
	j. Outer vent shorter than inner vent by:			
	1. 1/4 inch to 1/2 inch inclusive			X
	2. More than 1/2 inch		X	
	k. Outer vent longer than inner vent by more than 1/2 inch			X
XXIV	DARTS			
	a. Omitted on outside	X		
	b. Uneven in length by more than 1/2 inch			X
	c. Not properly tapered causing unsightly bulge			X
	d. Length, depth, location or construction other than specified		X	
	e. Dart not pressed open			X
XXV	HEMS (sleeve and bottom)			
	a. Irregular in width by more than 1/8 inch			X
	b. Twisted, puckered or pleated		X	
	c. Width not as specified			X
XXVI	BINDING			
	a. Omited	X		
	b. Twisted			X
	c. Not securely caught, causing binding to pull away from fabric	X		
	d. Binding short or tight, causing edge of seam to curl and not lie flat		X	
	e. Stretched causing edge to be wavy in appearance		X	
	f. End not overlapped as specified			X
	g. Not starting or finishing as specified or incomplete			X
	h. Not spliced or caught as specified			X
	i. Not specified width			X
XXVII	FRONT, BACK, AND SLEEVE LINING			
	a. Seams twisted, short, tight, puckered or pleated, clearly noticeable on outside		X	
	b. Backstitching at armpit of armhole from forearm seam to side seam omitted or insecure		X	
	c. Sleeve seam out of alignment with sleeve seam at armhole or at bottom of sleeve by more than 3/4 inch			X
	d. Bottom of front and back yokes staggered 1/2 inch or more at side seam			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Defect	Classification Major	Minor A	Minor B
e. Lining too long, extends below bottom edge of sleeve more than 1/2 inch			X
f. Tacking on bottom edge of back yoke to back side seam omitted or insecure			X
g. Lining not stitched to shoulder pad along the straight edge of pad		X	
h. Bottom turn-up of sleeve lining not specified distance from lower end of sleeve			X
i. Tacking of sleeve lining seam to sleeve seams omitted, insecure or incomplete		X	
XXVIII HANGING POCKET			
a. Stitching on one or both ends of welt not completely caught through specified plies of material, i.e., facing, stay piece or pocketing	X		
b. Reversed; finished with face side not on inside of pocket		X	
c. Twisted, tight or short; pocket does not lie smoothly		X	
d. Depth not as specified			X
XXIX HANGER LOOP			
a. Omitted			X
b. Misplaced, more than 1/2 inch off center with center back			X
c. Finished length, width or spread not as specified			X
d. Not specified type or construction			X
e. Insecure			X
XXX LABEL			
a. Missing, incorrect or illegible:			
1. Size label	X		
2. Combination label	X		
3. Removable size ticket	X		
b. Not attached as specified			X
c. Misplaced or stitching through printing			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Table VI - Selected defects

LAPEL AND COLLAR SHAPES (ends, points, and steps)
Twisted, short or tight, causing collar or lapel to curl out. Misshapen or distorted, any point varying from finished shaper by 1/2 inch or more. Not uniform in size or shape, varying from matching part by 1/2 inch or more.
POCKET AND WELTS
Out of horizontal alignment by more than 1 inch.
SLEEVE
Set improperly, causing sleeve to break or twist.

* 4.4.2.2 Dimensional examination. The overcoats shall be examined for defects in dimensions in accordance with the following:

(a) Any measurement deviating from nominal dimensions and tolerances specified in Table III shall be scored as a dimensional defect.

(b) Sleeve lengths unequal in length by 1/2 inch or more shall be scored as a dimensional defect.

* 4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units, for visual and dimensional examination shall be as follows:

	AQL's	Inspection level
For visual examination in 4.4.2.1		
Major	1.0	III
Major, Minor A (combined)	6.5	III
Total (Major, Minor A, Minor B combined)	15.0	III
For dimensional examinations in 4.4.2.2	4.0	S-3

* 4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each overcoat shall be unbuttoned and folded as follows:

(1) Keeping the lining exposed and collar extended, insert one shoulder into opposite shoulder area (base fabric face to face).
(2) Shape and smooth shoulder area and align front edges with center back seam.
* (3) Fold overcoat in half lengthwise to measure approximately 14 inches by 23 inches. Each overcoat shall be inserted in a snug-fitting clear polyethylene film bag of not less than 0.00125 inch thickness (± 20% tolerance). All seams and closures shall be formed by heat sealing. A 1/4 inch hole shall be made at one corner of the bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type where a heat seal closure and corner hole are not required. Also, the final closure of the bag shall be made with the flap tucked in or reversed.

5.1.2 Level C. Overcoats shall be preserved to afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Seven (7) overcoats, of one size and length, preserved as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to type CF, class weather-resistant, grade V15C, variety DW, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat, seven in depth within the container with every other one reversed and the length of the bags parallel to the side panels of the container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

* 5.2.2 Level B. Seven (7) overcoats, of one size and length, preserved as specified in 5.1., shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to type CF, class domestic, grade 275, variety DW, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat, seven in depth within the container with every other one reversed, and the length of the bags parallel to the side panels of the container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. Overcoats, preserved as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U.S. Postal Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

* 5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

* 5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding methods C and D or Film bonding F or G. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified in MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

* 5.5 MIL-STD-2073. When specified (see 6.2), Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The overcoat (Peacoat) is intended for use by the Navy's female personnel.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification
b. Sizes and lengths required (see 1.2)
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quantity, testing and approval of the first article.
e. Levels of preservation and packing required (see 5.1 and 5.2)
f. When palletization is required (see 5.4)
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification (see 3.3).

* 6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.6 Subject term (key word) listing.

Outer garment, double breasted
Outer garment, enlisted woman's
Outer garment, wool, melton
Peacoat, woman's


Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8410-N726

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:01Z
Check the source to verify that this is the currentversion before use.

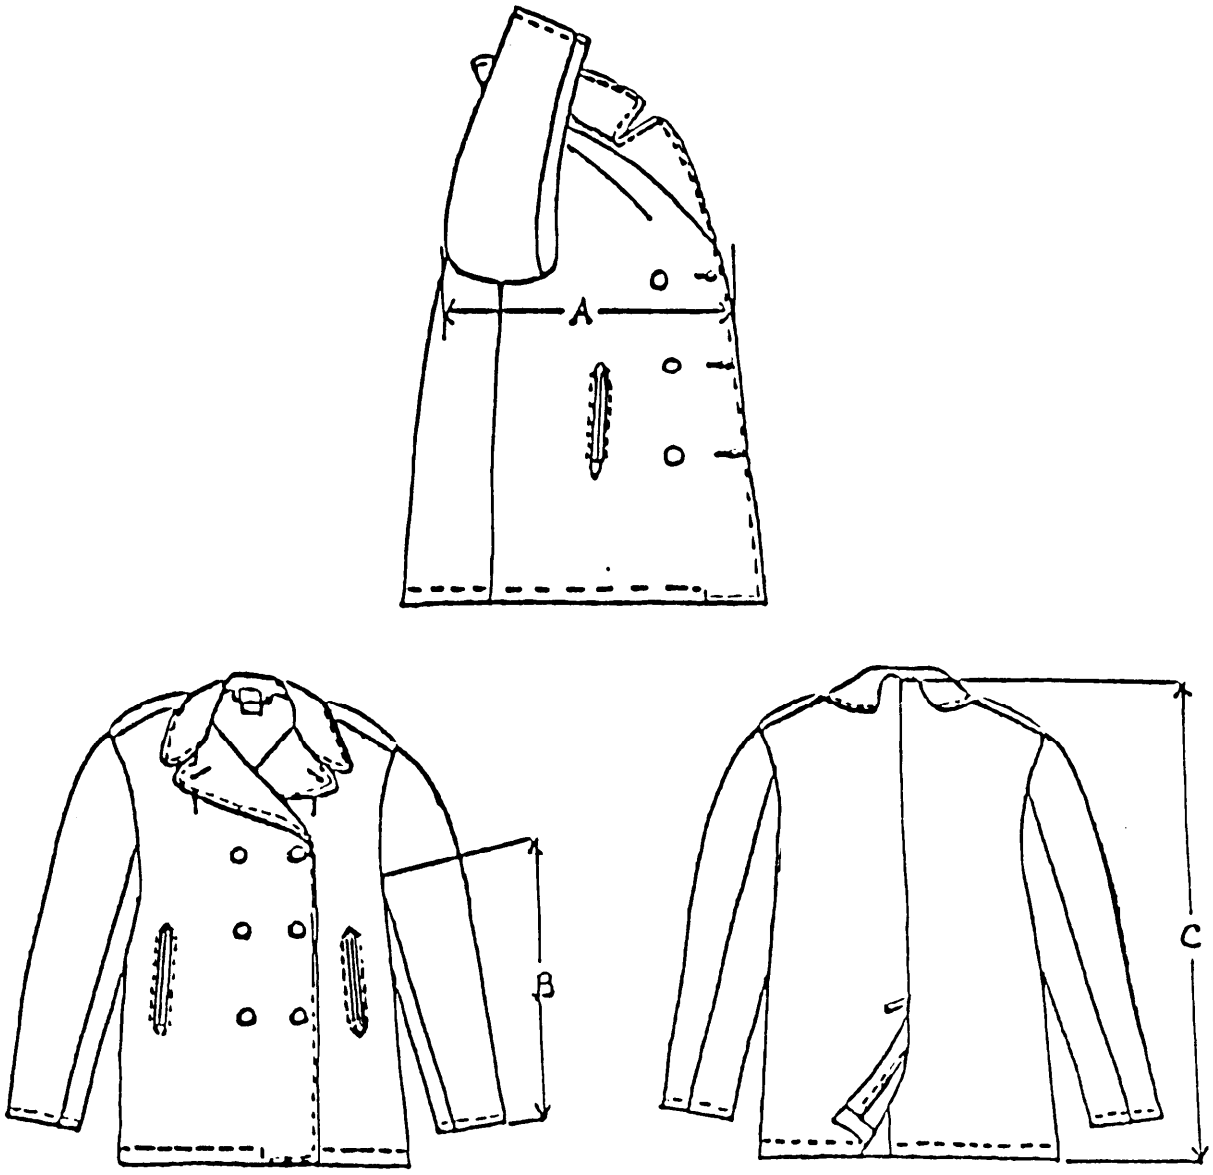

NOTE: Coat to have epaulets on shoulders. One dart on each front from shoulder, under the collar and visible in lapel area.

FIGURE 1

OVERCOAT, WOMAN'S, ENLISTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

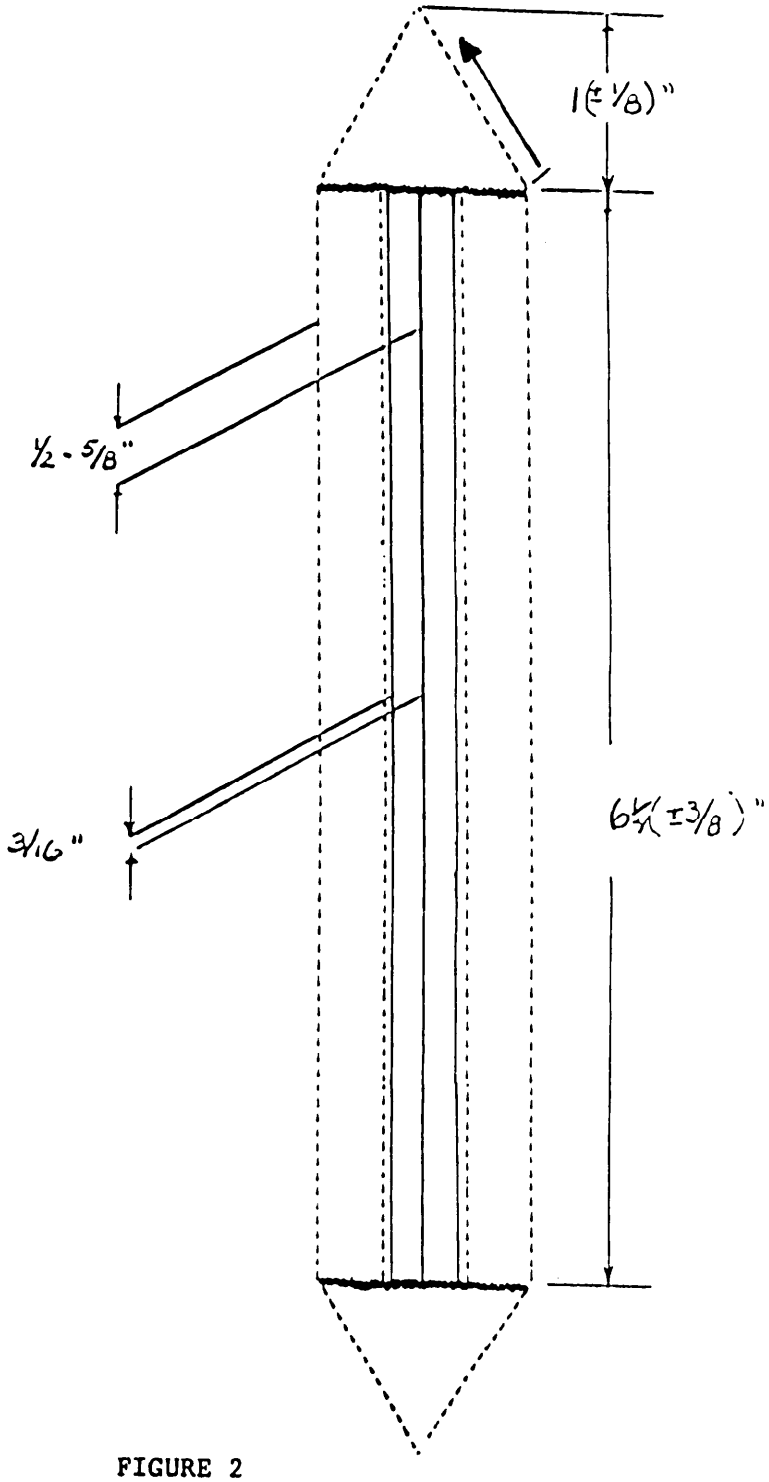


FIGURE 2

SLASH POCKET DETAIL
OVERCOAT, WOMAN'S ENLISTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

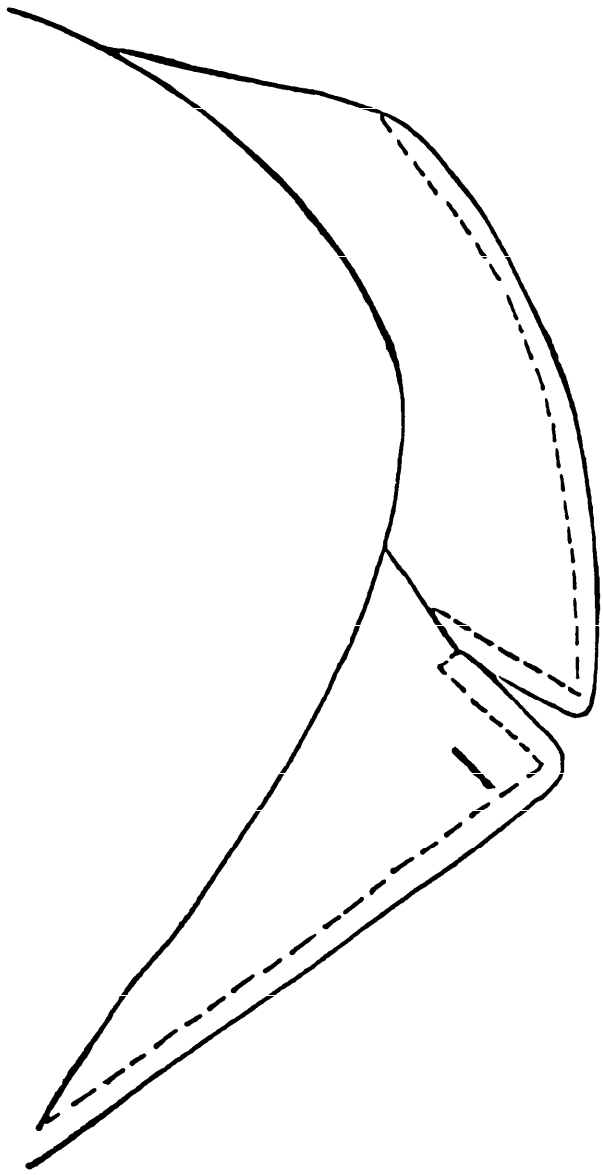


FIGURE 3

TOPSTITCHING DETAIL
OVERCOAT, WOMAN'S, ENLISTED

☆U.S. GOVERNMENT PRINTING OFFICE: 1990 - 704-034/30452

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
21 Strathmore Road, (Code 50)
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:01Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-O-24926A	OVERCOAT, WOMAN'S, ENLISTED

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2025-10-20T03:01Z
Check the source to verify that this is the current version before use.