MILITARY SPECIFICATION

SHIRT, MAN'S, SHORT SLEEVE, POLYESTER/COTTON (DURABLE PRESS)

This specification is approved for use by the United States Coast Guard and is available for use by all Department of Transportation and is available for use by all Departments and Agencies.

1. SCOPE

1.1 Scope. This specification covers the requirements for a short sleeve shirt made from blue, durable-press, polyester/cotton material.

1.2 Classification. The shirts shall be of one type only and in the following classes and sizes (see 6.2):

Class 1 - shirt without shoulder loops
Class 2 - shirt with shoulder loops.

Schedule of sizes. The shirts shall be furnished in the following sizes:

13, 13-1/2, 14, 14-1/2, 15, 15-1/2, 16, 16-1/2, 17, 17-1/2, 18

2. APPLICABLE DOCUMENTS

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC/NA FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:03Z
Check the source to verify that this is the current version before use.

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole and Button, Staple (Plastic)
NN-P-71	- Pallet, Material Handling, Wood Stringer Construction 2 Way and 4 Way Entry
DDD-L-20	- Label; For Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-T-43548	- Thread, Polyester, Cotton-Covered, and Rayon Covered
MIL-C-43594	- Cloth, Interlining, Polyester
MIL-C-43992	- Cloth, Broadcloth, Polyester/Cotton (Durable Press)

STANDARDS

FEDERAL

FED-STD-191	- Textile, Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202640-20T03:03Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the Manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

DEPARTMENT OF DEFENSE STANDARD COLOR CARD
OF OFFICIAL STANDARDIZED SHADES FOR SEWING THREAD

DEPARTMENT OF DEFENSE STANDARD SHADES FOR BUTTONS

(Application for copies may be obtained from the Color Association of the United States, Inc., 343 Lexington Ave., NY, NY 10016).

TECHNICAL MANUAL OF THE AMERICAN ASSOCIATION
OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

Test Method - 88B-81 (Two Photographs) Photographic Comparative Rating of Single and Double Needle Seams

(Applications for copies should be addressed to AATCC, P.O. Box 12215, Research Triangle Park, NC 27709.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:03Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material. (See 6.4).

3.3.1 Cloth, broadcloth, polyester and cotton, durable press. The broadcloth for the class 1 and class 2 shirts shall conform to class 1 of MIL-C-43992. The shade shall be Blue 3379. The piece number for the standard sample is 86237.

3.3.2 Interlining. The interlining for the collar and for the pocket flaps shall conform to MIL-C-43594.

3.3.3 Buttons. The buttons of Classes 1 and 2 shirts shall be 19-line, and conform to type II, Class K, Style 25 of V-B-871. The buttons for Classes 1 and 2 shirts shall be White, BA cable #62031, in accordance with Standard Shades for Buttons.

3.3.4 Thread. Unless otherwise indicated, the thread shall be a covered polyester, size 70, 2 ply conforming to MIL-T-43548.

3.3.4.1 Color. The thread shall be White AH, CA #66050 for class 1 and class 2 shirts, in accordance with Standard Shades for Threads.

3.3.5 Combination label. Each shirt shall have a combination label conforming to Type IV, classes 10 and 15 of DDD-L-20 and shall bear the following inscription:

Name:
Service No:
Name of Item: Shirt, Man's, Short Sleeve, 65% Polyester/35% Cotton (Durable Press)
Contract Number: DLA-100-00-0-0000 (Example)
Name of Contractor:

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:03Z
Check the source to verify that this is the current version before use.

LAUNDERING INSTRUCTIONS

Machine wash - warm water - NO BLEACH
Tumble dry - medium heat - remove promptly

3.3.5.1 Size label. The size label shall conform to type IV or VI, class 2 of DDD-L-20, and bear the following inscription:

Size: 13 1/2 (Example)
Stock No.: 8405-00-000-0000 (Example)

3.6 Design.

3.6.1 Class 1. The class 1 shirt shall be made of blue broadcloth, in an open collar design. The shirts shall be of safety-stitched construction. The shirts shall have a yoke, a soft collar, two patch pockets with flaps on the front, a pencil pocket under the patch pocket of the left front, and a tapered body. (See Figures 1 and 2).

3.6.2 Class 2. The class 2 shirt shall be identical in design to the class 1 shirt except that it shall have shoulder loops. (See Figure 3).

3.6.3 Figure. Figures 1- 3 are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.7 Patterns. Standard patterns will be furnished by the Government (see 6.3). The standard patterns shall not be altered in any way and are to be used for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns. The standard patterns provide an allowance of 1/4 inch for all seams except for the bottom hem and for setting the pockets. The seam allowance for the bottom hem and for setting the pockets shall be 3/8 inch. Unless otherwise indicated in Table I, seams shall be in accordance with these seam allowances.

3.8. Pattern parts. The component parts of the shirt shall be cut from the material specified in accordance with the following pattern parts:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:03Z
Check the source to verify that this is the current version before use.

Materials	Nomenclature of Pattern Parts	Cut Parts
Cloth, broadcloth, polyester and cotton, durable press	Back	1
	Yoke	2
	Front (left and right)	2
	Sleeve	2
	Collar	2
	Pocket	2
	Pocket flap	4
	Pen and pencil pocket	1
	Shoulder loop (for class 2 only)	No pattern
Interlining	Collar interlining	1
	Pocket flap interlining	2
Template	Finished pocket template	-
	Finished flap template	-

3.9 Stitches, seams, and stitching. Stitches, seams and stitching types as specified in Table I, shall conform to FED-STD-751. Whenever two or more methods for seams or stitches are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of shirt. Unless otherwise specified, edgestitching shall be 1/16 - 1/8 inch and topstitching shall be not less than 3/16 inch nor more than 1/4 inch from folded edge. The guides and knives on machine producing stitch types 515, 516, and 519 shall be set to trim only the raveled edges of the fabric. The trimming shall not exceed 1/16 inch. Seam allowances shall be maintained. Seams shall be sewn so that there will be no raw edges, run-offs, twists, pleats or puckers. The following practices to avoid puckering and to produce the flattest seams possible shall be given consideration by the manufacturer of the shirt. The needle should be the smallest size possible with a slim point. The smallest throat plate hole possible should be used to prevent flagging. Pressure on the presser foot should be just enough to insure a steady flow of material. The feed dogs should contain 18 to 20 teeth per inch for normal sewing and 20 to 25 teeth per inch for stitching down. All attachments should be as smooth as possible to permit free flowing of the material through the machine. The lighest possible thread tensions, while maintaining a good stitch, should be used. The upper and lower threads shall be balanced. Checks to insure that blunt needles are eliminated and that machine adjustments are maintained should be made frequently.

3.9.1 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.9.2 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or 401 stitch type thread breaks may be repaired by using 301 stitch type.

Source: https://assist.dla.mil -- Downloaded: 202640-20T03:03Z
Check the source to verify that this is the current version before use.

3.9.3 Buttonholes. The buttonholes shall be straight style with both ends securely barred. The finished cut length shall be 5/8 (± 1/16) inch.

3.10 Manufacturing operations requirements. The shirt shall be constructed in accordance with operations listed in Table I. The contractor is not required to follow the exact sequence of operations as listed, provided the finished shirt is identical with that produced by following the exact sequence.

3.11 End item seam appearance. After the shirt has been subjected to 5 washings, the seams of the shirt shall have a seam and stitching appearance rating of 3.0 for the underam seam, of 3.0 for the side seams, and of 3.5 for each of the following stitched areas: collar, shoulder yoke, armhole, shoulder loops, sleeve hem, pockets, flaps, and front edges. (The bottom hem and the label stitching shall not be included in the seam and stitching appearance rating.) All ratings shall apply to testing as specified in 4.5.

3.12 Shade and size marking. The component parts shall be marked or ticketed to insure a uniform shade and size throughout the shirt. Any method of shade and size marking may be used except:

1. Corrosive metal fastening devices
2. Sew on shade tickets.
3. Adhesive type tickets whose adhesive causes discoloration or whose adhesive mass adheres to the material upon removal of the tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the shirt and wherever possible, is covered by the seam allowance.

3.13 Pressing. All pressing as required by Table I shall be performed with a heated pressing iron or machine at a suitable temperature for synthetics.

3.14 Abbreviations in table of operations. The abbreviations used in table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 202640-20T03:03Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
1.	Cutting a. The shirts shall be cut in strict accordance with patterns furnished which show size, shape, placement of pocket, directional line for cutting, and notches for the proper assembly of all parts. The fronts shall be cut with the edge of the grown-on facings on the selvage. When selvageless cloth is utilized, or when selvaged edge is cut or frayed, the edge shall be serged. b. All component parts shall be cut from one piece of material, except that the under plies of pocket flaps and yoke, pen and pencil pocket, and undercollar may be cut from ends. The parts cut from ends shall approximate the shade of other parts of the shirt.	502 or 503	SSa-1	6-8	70	70
2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4 shall be removed from production and replaced with nondefective and properly matched components.					
3.	Shade marking (see 3.12) Mark or ticket all parts except those cut from ends to insure a uniform shade and proper assembly of the shirt.					
4.	Marking The combination identification and instruction marking shall be legibly stamped on the outside of the left shirt tail. It shall be positioned so that the left edge of printing is 1-1/4 to 2 inches from the left front turned edge and the top edge of printing is 5 (+ 1/2) inches from bottom hemmed edge of shirt at left hand bottom corner of label. Measurements indicated are for a finished shirt.					
5.	Make pocket flaps and attach pen and pencil pocket					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:03Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	a. Join the three plies of flap around the ends and pointed edge 1/4 inch from the raw edges. Trim corners and point.	301 or 401	SSe-2(a)	10-14	70	70
	b. Turn flaps to finished position and edgestitch 1/16 to 1/8 inch from folded edges.	301	SSe-2(b)	10-14	70	70
	c. Position a flap on each shirt front by placing raw edge on the drill marks of the patterns. Stitch each flap to front 1/8 to 3/16 inch from raw edge.	301	LSb1-2(a)	10-14	70	70
	d. Finished pocket flap for sizes 13-15 shall measure 4-1/2 (± 1/8) inches wide, 1-1/8 (±1/8) inches at sides and 2-1/8 (±1/8) inches at center. Sizes 15-1/2 - 18 shall measure 5-1/4 (± 1/8) inches wide, 1-5/8 (±1/8) inches at sides and 2-1/8 (±1/8) inches at center.					
	e. The finished flap shall be checked for size and uniformity against the pocket template.					
	f. Turn the flaps down and topstitch 3/16 to 1/4 inch from the folded edge enclosing raw edges. The front facing should be caught in this operation.	301	LSb1-2(b)	10-14	70	70
	g. Turn down the top edge of the pencil pocket 1 (± 1/4) inch and stitch 1/16 to 1/8 inch from the raw edge.	301	EFa-1	10-14	70	70
	h. Turn in the side edges of the pencil pocket 1/2 inch and stitch to the left front of the shirt as indicated by marks on the patterns. Tack the ends of each seam by backstitching. The finished pencil pocket shall be 2-1/4 (± 1/8) inches wide.	301	LSd-1	10-14	70	70
	i. Form two compartments with a row of vertical stitching at the center (± 1/8 inch off center tolerance) through the shirt.	301	SSv-1	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:03Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
6.	Make patch pockets					
	a. Form a hem at top of the patch pocket according to pattern marks with raw edge folded under. The width of the finished patch pocket hem shall be 7/8 (+ 1/8) inch at the sides and 1-3/8 (+ 1/8) inch at center.	301	EFb-1	10-14	70	70
	b. Stitch pocket to each front according to marks on patterns 1/16 to 1/8 inch from edge, with top corners of pockets tacked with a triangular stitching. The base of the triangle shall be at top corner of pocket and apex at lower corner of the hem. The base of the triangle shall measure to 3/16 to 1/4 inch wide. The front facing may be caught in the pocket stitching.	301	LSd-1	10-14	70	70
	OR					
	As an alternate, backtacking the ends of pocket stitching is permitted.					
	c. Finished pockets for sizes 13-15 shall measure 4-1/4 (+ 1/8) inches wide and 5-1/4 (+ 1/8) inches long. Sizes 15-1/2 - 18 shall measure 5 (+ 1/8) inches wide and 5-3/4 (+ 1/8) inches long.					
	d. The finished pocket shall be checked for size and uniformity against the pocket template.					
	e. The pocket may be creased in an edge creasing machine to insure uniformity of shape and size.					

Source: https://assist.dla.mil -- Downloaded: 202640-20T03:03Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
7.	Attach yoke. a. Position the back of the shirt between the two plies of the yoke and with the back and the yoke edges even. Stitch all plies together. There shall be no fullness between the two plies in the finished shirt. The finished yoke shall be without twists or puckers.	301 or 401	SSa-1	10-14	70	70
8.	Make shoulder loops (for class 2 shirt only) NOTE: Class 1 shirts shall not include shoulder loops. a. Fold a strip of self fabric in half lengthwise; turn both raw edges to the inside, and stitch 1/16 inch from each edge.	301	EFp-2	10-14	70	70
	OR					
	b. Abut raw edges of a self fabric strip and double stitch not less than 3/16 inch gauge, using a covering stitch on the underside.	402 or 406	EFh-1	10-14	70	70
	c. Finished shoulder loops shall measure 1/4 to 5/16 inch wide.					
9.	Join shoulder seams (class 1 shirt only). a. Position the fronts between the two plies of the yoke and with the fronts and the yoke edges even. Stitch all plies together. The stitching shall not show on the finished shirt. Turn to finished position.	301 or 401	SSa-1	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:03Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
10.	Join shoulder seams and attach shoulder loops (class 2 shirt only).	301 or 401	SSa-1	10-14	70	70
	a. Position the fronts between the two plies of the yoke with the yoke edges even. Stitch all plies together simultaneously, inserting and catching two shoulder loops in each shoulder seam. The shoulder loops shall be inserted so that one shoulder loop will be centered 1-1/4 (+1/8, -0) inches up along the front shoulder seam from the finished sleeve seam and the other shoulder loop will be centered 3-3/8 (± 1/8) inches from the first shoulder loop. The stitching shall not show on the finished shirt. Turn to finished position.					
	b. Turn under the free end of each shoulder loop 1/4 to 5/16 inch, and securely stitch or bartack to the yoke and the back of the shirt 1/16 from the folded edge. The tack shall extend the width of the shoulder loop but not beyond. The shoulder loop nearest the armhole seam shall have a free opening of 1-1/4 (+ 1/8, -0) inches. The shoulder loop nearest the collar shall have a free opening of 1 ±1/8 inch.	301 or Brtck or auto-matic loop tacker		10-14 28 stchs per brtck 24-28 stchs per tack	70	70
11.	Make collar					
	a. Join the three plies of the collar with the outer ply and the under ply face to face and the interlining next to the outer ply.	301 or 401	SSe-2(a)	10-14	70	70
	b. Trim the corners, turn, and press the collar points. A collar pointing machine may be used.					
	c. Edge stitch 1/16 to 1/8 inch edge.	301	SSe-2(b)	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:03Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. The collar shall be pressed smooth and flat. The undercollar shall not be exposed beyond the edge of the top collar.					
12.	Attach collar and size label a. Fold back the left and right fronts to the outside at the notch indicated on pattern to form a facing.					
	b. Position the collar between the front and the facing. With the center back notches matching, seam across the step and the gorge to the back edge of the facing and seam the undercollar to the neck of the shirt, catching the collar interlining. Notch through all plies of material on neckline at termination of the stitches.	301	SSa-1	10-14	70	70
	c. Turn the facings and work out steps. Turn under the unsewn portion of the topcollar, and stitch to the neck through the undercollar 1/16 inch from the edge, simultaneously catching (by inserting), the top end of the facing and the size label horizontally. The label shall be centered (+ 1/2 inch) on the inside back of the shirt.	301	LSb-1	10-14	70	70
	d. The finished collar shall measure 3-1/4 (+ 1/8) inches deep at the center back and 3-1/4 (+ 1/8) inches long at front points.					
	e. Type IV size label inscription shall be stamped on inside bottom edge of topcollar and centered + 1/2 inch. There shall be no evidence of the printing visible on outside of finished collar as worn.					
	f. The pointed ends of the collar shall be uniform in shape and the ends equal distance from the shirt front edges and from the shoulder yoke seam line.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:03Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
13.	Attach sleeves Join sleeves to armholes by seaming and overedging the raw edges in one operation. The width of the overedge stitching shall be 1/8 to 3/16 inch.	515 or 516 or 519	SSa-2	10-14	70	70
14.	Join sides and sleeve seams Join side seams and sleeve seams by seaming and overedging the raw edges in one operation with the armhole seam toward the sleeve. Ends of armhole seam shall not be staggered more than 3/8 inch at armpit. The width of the overedge stitching shall be 1/8 to 3/16 inch.	515 or 516 or 519	SSa-2	10-14	70	70
15.	Hem shirts a. Hem the bottom of the fronts and the back of the shirt with raw edge turned in. Stitch through the shirt with the hem extending to the folded edge of the fronts catching the grown-on facing in the stitching. The finished hem shall be approximately 1/8 inch wide. The side seams shall be turned in the same direction as turned at the sleeve hem.	301	EFb-1	10-14	70	70
16.	Hem bottom of sleeves a. Form a hem on the bottom of the sleeves with raw edge turned in and stitch 1/16 to 1/8 inch from edge. b. The finished sleeve hem shall be 1-1/8 (±1/8) inches wide. NOTE: Operation 14 must be performed before Operation 16.	301	EFb-1	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:03Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
17.	Make buttonholes All buttonholes shall be vertical, and shall be located as follows: One centered in each pocket flap 1/2 (+ 1/8) inch above the center point, measured from lower inside end of buttonhole. Five on the left front placed 3/4 (+ 1/8) inch from the folded edge through the facing. The buttonholes shall be spaced 4 (+ 1/8) inches apart according to marks on pattern. Buttonholes shall be measured from center to center.	Button-hole		42-46 per-button-hole including tacks	70 or 40	70 or 40
18.	Sew on buttons Sew seven 19-line buttons located as follows: Five on right front with center of buttons 5/8 (+ 1/8) inch from the edge to correspond with the buttonhole on the left front. One centered on each patch pocket with the center of the button aligned with the center of the buttonhole on the pocket flap. Stitching shall be through pocket hem.	101 or 301		14-16 per button 14-16 per button	70 or 40 70 or 40	70 or 40
19.	Cleaning a. All thread ends shall be trimmed and loose threads removed from shirt. b. Remove all spots and stains. c. Remove all shade tickets. NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result.					

Source: https://assist.dla.mil -- Downloaded: 202640-20T03:03Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
20.	Press shirts Before buttoning the flaps and shirt front, press the collar, fronts, pocket flaps, pockets, yoke, back and sleeves. The sleeves shall be pressed flat with a crease along the top of the sleeve and the collar shall be pressed flat for its entire length. NOTE: The use of steam inflated bag type machine is prohibited for pressing.				

Source: https://assist.dla.mil -- Downloaded: 202640-20T03:03Z
Check the source to verify that this is the current version before use.

3.15 Sizes and measurements. Sizes and measurements of the finished shirts shall be as shown in Table II. All measurements and tolerances indicated in Table II are in inches.

Table II - Sizes and Measurements

Size	A 1/2 Chest	B Back Length	C Sleeve Length	D Collar	E 1/2 Waist
13	17-3/4	30-1/4	6-1/2	13-1/2	15
13-1/2	18-3/4	30-1/2	6-1/2	14	16
14	19-3/4	30-3/4	6-1/2	14-1/2	17
14-1/2	20-3/4	31	6-1/2	15	18
15	21-3/4	31-1/4	6-1/2	15-1/2	19
15-1/2	22-3/4	31-1/2	6-1/2	16	20
16	23-3/4	31-3/4	6-1/2	16-1/2	21
16-1/2	24-3/4	32	6-1/2	17	22
17	25-3/4	32-1/4	6-1/2	17-1/2	23
17-1/2	26-3/4	32-1/2	6-1/2	18	24
18	27-3/4	32-3/4	6-1/2	18-1/2	25
Tolerance	± 1/2	± 1/2	± 1/4	± 1/4	± 1/4

NOTE: Measurements A, B, and E shall be taken with the shirt fully buttoned, laid flat, and in a relaxed condition. Measurements C and D shall be taken with the shirt unbuttoned.

A. 1/2 Chest - The measurement taken across the front at base of armholes from folded edge to folded edge.

B. Back Length - Measurement shall be taken along center of back from collar joining seam to bottom edge of shirt.

C. Sleeve Length - Measurement shall be taken from base of armhole (junction of seams) along inseam to bottom of sleeve.

D. Collar - Measurement shall be taken along base of collar from collar edge to collar edge.

E. 1/2 Waist - Measurement shall be taken from folded edge to folded edge at narrowest part of waist.

3.16 Workmanship. The finished shirt shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable point or defect limit.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:03Z
Check the source to verify that this is the current version before use.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsiblity of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

    a. Component and material inspection (see 4.4.1).
    b. In process inspection (see 4.4.2.1)

4.3 First article inspection. The first article submitted in accordance with 3.2, shall be inspected as specified in 4.4.3 for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents.

4.4.2 Sampling for testing. Unless otherwise specified in subsidiary specifications, the sampling shall be as specified below:

Lot size	Sample size (sample unit)
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:03Z
Check the source to verify that this is the currentversion before use.

4.4.2.1 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are carried out as specified. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated nonconformance.

4.4.3 End item inspection. The shirts shall be tested as specified in Table III. All test reports shall contain the individual values utilized in expressing the final results. All requirements shall be applicable to the sample unit. The sample size shall be as specified in 4.4.2 and the sample unit shall be one finished shirt. One shirt shall be used to evaluate the appearance requirements. The lot shall be unacceptable if one or more units fail to meet the requirement specified.

Table III. End item testing

Characteristic	Requirement paragraph	Test method
Seam appearance rating	3.11	4.5.1

4.5 Methods of inspection.

4.5.1 Laundering and conditioning. The sample shirts shall be subjected to 5 complete cycles. Laundering shall be in accordance with AATCC Test Method 88B Wash Condition 3 and Dry Procedure C(tumble). During the conditioning period, the shirts shall be placed on wooden or plastic hangers and shall be buttoned at the front.

4.5.2 Evaluation procedure. After the test shirts have been laundered and conditioned as specified in 4.5.1, the shirts shall be evaluated by three trained observers. The trained observers, independent of the other observers, shall evaluate each of the shirts as follows: The shirt shall be placed on a clothes hanger with the buttons fastened and the hanger suspended on the viewing board in such a manner that the shirt lies flat on the surface of the board. The Method 88B photographic standards for single needle stitching shall be placed on the viewing board. The observer shall stand directly in front of, but four feet from, the test shirt. The observer shall then compare the test shirt in each of the areas specified in 3.11 to the photographic standards and shall assign a rating value to each of the specified areas. The rating value assigned to an area by the observer shall be the numerical value of the photographic standard that most nearly matches the area. Ratings falling between the numerical values of the photographic standards may be rated 2.5, 3.5, or 4.5. Each rating value assigned by each of the observers shall be recorded. The average rating values assigned by each observer to the same area shall be the rating value for that area.

4.6 End item examination. The end item shall be examined for the defects listed in 4.6.1 thru 4.6.3. The sample unit shall be one shirt. Defects shall be classified as listed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:03Z
Check the source to verify that this is the current version before use.

4.6.1 General defects.

Defect	Classification Major	Minor
MATERIAL DEFECT AND DAMAGE		
a. Hole, cut, tear, smash, burn, drill hole, scorched area or open place:		
1. On outside (longest dimension in any direction):		
(a) Up to 1/4 inch, inclusive		X
(b) More than 1/4 inch	X	
2. On inside (longest dimension in any direction):		
(a) More than 1/4 inch		X
3. Knot or slub on outside		X
b. Misweave, area of no dye penetration, dye streak, missing yarn, broken yarn, visible mend, thin place, shade bar on outside 1/		X
c. Loose yarn, snagged thread, coarse yarn or woven in waste 1/		X
d. Embedded crease of a permanent nature in cloth		X
e. Needle chew on outside (largest dimension in any direction):		
1. Up to 1/2 inch, inclusive		X
2. More than 1/2 inch	X	
SHADED PARTS		
a. Any part required to be cut from one piece of material, shaded	X	
b. Variation in shade within an outside part 1/		X
CLEANNESS		
a. Spot or stain on outside	X	
b. Three or more thread ends not trimmed to 1/4 inch or less on outside	X	
c. Five or more thread ends not trimmed to 1/2 inch or less on inside		X
d. One or more shade or size tickets not removed		X
e. Prior to folding and packaging, shirt contains residual fiber particles, lint, dust, or other foreign substance	X	

1/ This defect shall not be scored on undercollars or under ply of flaps or below bottom button.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:03Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
CUTTING		
a. Any component part not cut in conformance with specification requirements	X	
COMPONENT AND ASSEMBLY		
a. Any component part omitted or required operation omitted (unless otherwise classified)	X	
b. Any component part twisted, distorted, pleated, misshaped, tight or full (unless otherwise classified)		X
c. Any component not as specified (type, size, color, etc)	X	
d. Any operation not as specified (unless otherwise classified)		X
e. The edge of any component part required to be forced out having folds (unless otherwise classified):		
1. More than 1/8 inch	X	
PRESSING		
a. Omitted, poorly pressed, not pressed as specified, or exhibiting a double crease line	X	
b. Seams not pressed flat		X
SEAMS AND STITCHING		
a. Accuracy of seaming:		
1. Seam irregular, twisted, pleated, or wavy	X	
2. Seam puckered (score only when on major portion of seam)		X
3. Any part of shirt caught in an unrelated operation or stitching		X
4. End of stitching when not caught in other seam or stitching backstitched less than 3/8 inch		X
5. Thread break secured by stitching back of the break less than 1/2 inch		X
6. Ends of a continuous line of stitching overlapped less than 1/2 inch		X
7. Wrong or varying shades of specified color thread used on outside of shirt		X
b. Gauge of stitching and seam allowance:		
1. Gauge irregular or not within range specified		X
2. Edge or raised stitching sewn too close to edge, resulting in damage of cloth		X
3. Seam allowance greater than 1/16 inch more or less than specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:03Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
c. Open seam:		
1. On all seams except bottom hem		
(a) Up to 3/4 inch (inclusive)		X
(b) More than 3/4 inch	X	
2. Bottom hem: more than 1/2 inch		X
d. Runoff:		
1. On joining seam score as open seam		
2. Edge or raised stitching (when not resulting in an open seam):		
(a) More than 1/2 inch		X
e. Raw edge:		
1. On outside		
(a) Up to and including 3/8 inch		X
(b) More than 3/8 inch	X	
2. On inside		
(a) More than 2 inches	X	
(b) 1/4 inch up to 2 inches inclusive		X
f. Seams and stitch type:		
1. Not specified seam or stitch type	X	
2. Looper thread of 401 stitch type on outside	X	
3. Any required line of stitching omitted	X	
4. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)		X
g. Broken, missing, or skipped stitches on edge or raised stitching (when seam is seamed, turned, and stitched):		
1. 1/4 inch or more		X
h. Stitch tension		
1. Loose tension resulting in a loose seam	X	
2. Loose tension on raised or edge stitching resulting in exposed loose thread		X
3. Tight tension (stitches break when normal strain is applied in direction of seam or stitching)	X	

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:03Z
Check the source to verify that this is the currentversion before use.

Defect	Classification Major	Minor
i. Stitches per inch (to be scored only when the condition exists on more than half the length of seam or stitching)		
1. Less than the minimum	X	
2. More than maximum		X
BUTTONHOLE		
a. Omitted, not specified type, size or not finished as specified	X	
b. Uncut buttonhole		X
c. Ragged edges, i.e., yarns or thread ends on inside of buttonholes not trimmed to less than 1/4 inch or basic fabric not caught by buttonhole stitching		X
d. One or more broken stitches or two or more skipped stitches in one or more buttonholes		X
e. Buttonhole stitching extending beyond bartack; stitches per buttonhole less than minimum specified		X
f. Finished cut length not as specified		X
g. Two or more uncut yarns in buttonhole (not caught in overcast stitching)	X	
BUTTON - One or more		
a. Missing, broken, defective, misplaced, not positioned or attached as specified, or insecurely sewn	X	
b. Stitching on one or more not locked at end of cycle (tug at the loose end of the thread when accessible to determine if it will ravel)		X
BARTACK OR TACK - One or more		
a. Missing, insecure, misplaced, not specified size or type, or not serving intended purpose:		
1. Bartack for attachment	X	
b. Loose stitch tension		X
MARKING		
a. Not affixed as specified or misplaced		X
b. Missing, incorrect, illegible, or strike through	X	
COLLAR		
a. Not uniform in size or shape - any point varying:		
1. More than 3/8 inch with corresponding point on matching part	X	
2. 1/4 inch up to 3/8 inch (inclusive) with corresponding point on matching part		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:03Z
Check the source to verify that this is the current version before use.

Classification Defect	Major	Minor
b. Collar point uneven in length by:		
1. More than 1/4 inch up to 3/8 inch (inclusive)		X
2. More than 3/8 inch	X	
c. Twisted, not smooth, short or tight causing collar to turn out	X	
d. Collar point not properly forced out	X	
e. Collar off center by: 1/		
1. More than 3/8 inch in depth		X
1/ Center of collar is determined by aligning the two shoulder seams at junction of collar.		
f. Collar tight causing puckers or pleats at neckline		X
g. Ends of collar not properly forced out, i.e., having a fold of:		
1. More than 1/8 inch in depth		X
h. Under collar exposed on outside of top collar more than 1/16 inch for a distance of more than 1 inch		X
SHOULDER LOOPS		
a. Poorly shaped	X	
b. Misplaced, i.e., loops on left shoulder vary in position from loops on right shoulder by more than 3/8 inch	X	
c. Width of loops less than 1/4 inch or more than 5/16 inch		X
d. Distance from finished armhole seam to first loop less than 1-1/4 inches or more than 1-3/8 inches	X	
e. Distance between loops less than 3-1/8 inches or more than 3-1/4 inches	X	
f. Free opening of loop nearest armhole less than 1-1/8 inches or more than 1-3/8 inches	X	
g. Free opening of loop nearest collar less than 7/8 inch or more than 1-1/8 inches	X	
FRONT		
a. Spacing between two or more buttonholes unequal by 1/4 inch		X
b. Two or more buttonholes out of vertical alignment by:		
1. 1/8 inch up to and including 1/4 inch		X
2. More than 1/4 inch	X	
c. Front tight or short, or front facing tight or twisted causing noticeable bulge or twist when shirt is buttoned	X	

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:03Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
d. Front edge not folded straight with warp line (i.e., forming curve)		X
e. Lapel step more than 1-1/2 inches or less than 3/4 inch wide, or width of steps uneven by more than 1/4 inch	X	
f. Uneven in length at bottom when buttoned by:		
1. More than 1/2 inch		X
g. Two or more buttons out of vertical alignment by:		
1. 1/8 inch up to and including 1/4 inch		X
2. More than 1/4 inch	X	
FRONT FACING		
a. Facing not caught as specified		X
b. Back edge of facing not finished as specified		X
c. Width of facing not as specified		X
d. Facing not smooth and flat, shows evidence of puckering		X
POCKET(S) OR FLAP(S)		
a. Not uniform in size or shape - any measurement, varying from pocket to pocket or flap to flap or pocket or flap to template by:		
1. More than 1/4 inch	X	
2. 1/8 inch up to 1/4 inch (inclusive)		X
b. Out of alignment from pocket to pocket or flap to flap by: (Determination may be made by a straight edge)		
1. More than 3/8 inch	X	
2. More than 1/4 inch up to and including 3/8 inch		X
POCKET		
a. Pocket edge not parallel to front edge of shirt by:		
1. More than 3/8 inch	X	
2. 1/4 inch up to 3/8 inch inclusive		X
b. Edge of pocket pleated or twisted		X
c. Pocket corner not secured as specified		X
d. Pocket width or depth not as specified		X
e. Pocket opening gapped		X
f. Width of hem not as specified		X

Source: https://assist.dla.mil -- Downloaded: 202640-20T03:03Z
Check the source to verify that this is the currentversion before use.

Defect	Classification Major	Minor
FLAP		
a. Attached crookedly		
1. Distance between sides of pocket and underside of opened flap vary by more than 1/8 inch	X	
b. Width or length of flap not as specified		X
c. Pocket exposed beyond end of flap by 1/8 inch or more		X
d. Raw edge exposed on underside of flap		X
e. Edge of flap not parallel to front edge of shirt by:		
1. More than 3/8 inch	X	
2. 1/4 inch up to 3/8 inch (inclusive)		X
f. Not properly forced out	X	
PENCIL POCKET		
a. Omitted or not positioned as specified		X
b. Stitching of pencil pocket not as specified		X
c. Corner of pencil pocket not securely tacked		X
ARMHOLE AND SLEEVE		
a. Sleeve tight causing pleat or excessive puckers on front, back, or sleeve	X	
b. End of armhole seam not staggered as specified		
c. Sleeves reversed	X	
YOKE		
a. Yoke and back not lapped as specified.		X
BOTTOM HEM AND SLEEVE HEM		
a. Width not as specified		X
b. Irregular in width by 1/4 inch or more		X
c. Hem twisted, pleated or puckered		X
d. Hem end extending more than 1/8 inch beyond front edge of shirt		X

4.6.2 Size measurements. Any measurement deviating from the dimensions and tolerances specified in Table II shall be scored as a measurement defect. Sleeves uneven in length by more than 1/2 inch shall be classified as a measurement defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:03Z
Check the source to verify that this is the current version before use.

4.6.3 Inspection levels and AQL's. The inspection levels and the AQL expressed in defects per hundred units (DHU) shall be as follows:

	AQL's	Inspection levels
For defects listed in 4.6.1		
Major	2.5	II
Total (major and minor combined)	10.5	II
For defects listed in 4.6.2 (size measurements)		
One class	4.0	S-3

4.7 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

4.7.1 Palletization examination. An examination shall be made to determine that the palletization complies with the Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 as specified in MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-20T03:03Z
Check the source to verify that this is the currentversion before use.

5.1.1 Level A. Each fully buttoned shirt shall be folded to approximately 14-1/2 by 10-1/2 inches and secured with noncorrosive metal pins, aluminum clips or plastic fasteners. Each folded shirt shall be inserted in a clear polyethylene bag fabricated from film of not less than 0.00125 (± 20 percent tolerance) thickness. All seams and closures shall be effected by heat sealing with final heat closure made as close as possible to the open end. A 1/4 inch maximum diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape.

5.1.2 Level C. The shirts shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Seventy-two shirts (72) of one size and class only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, closed and reinforced conforming to class weather-resistant, variety DW, grade V15c, type CF, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat, front up, collars alternated front to rear, two in length, one in width, and 36 in depth within the shipping container. Each shipping container shall have its contents completely covered on the top and the bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Seventy-two shirts (72) of one size and class only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, closed and reinforced conforming to class domestic, variety DW, grade 275, type CF, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic, of MIL-B-17757. Level A packages shall be packed flat, front up, collars alternated front to rear, two in length, one in width, and 36 in depth within the shipping container. Each shipping container shall have its contents completely covered on the top and the bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Level C. Shirts, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:03Z
Check the source to verify that this is the current version before use.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black, bold letters 1/4 inch in height directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NO:
SHIRT, MAN'S, SHORT SLEEVE, 65% POLYESTER/35% COTTON (DURABLE PRESS)
SIZE:
QUANTITY:

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV, V or VIII, Class 1, Style A, Size 2, wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 of wood group I, II, III, or IV, Grade A of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

6. NOTES

6.1 Intended use. The shirts covered by this specification are intended to be worn by male personnel of the United States Coast Guard.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification
b. Sizes and classes required (see 1.2)
c. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity, and testing and approval of the first article.
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2)
e. When palletization is required (see 5.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:03Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing:

Blue, 3379
Durable Press
Polyester/Cotton, 65/35
Short Sleeve

Custodian:
Navy - NU

Review Activity:
DLA - CT
NU - CG

Preparing Activity:
Navy - NU

Project No. 8405-N017

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:03Z
Check the source to verify that this is the current version before use.

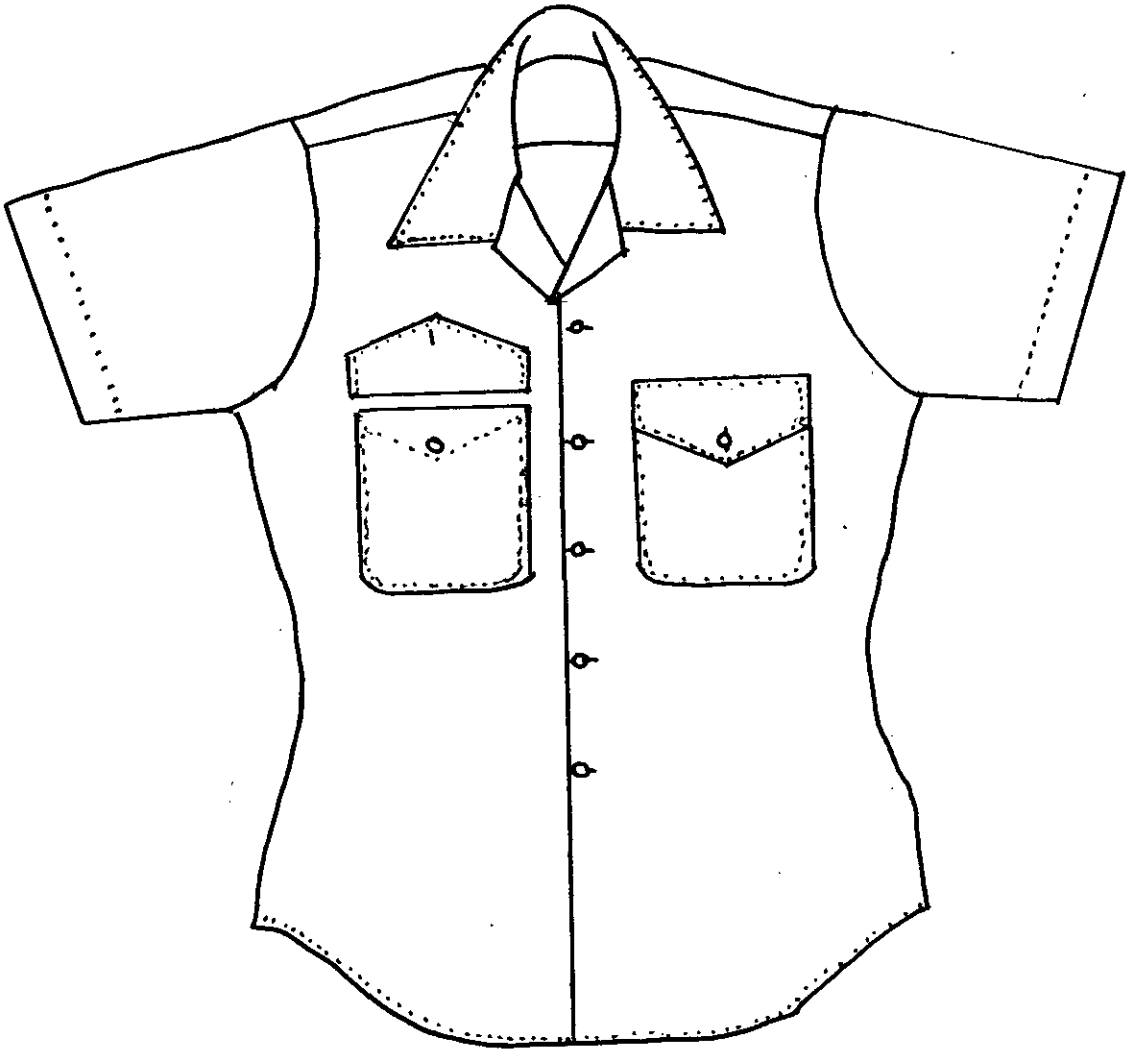


FIGURE 1. CLASS 1 SHIRT (FRONT VIEW)

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:03Z
Check the source to verify that this is the current version before use.

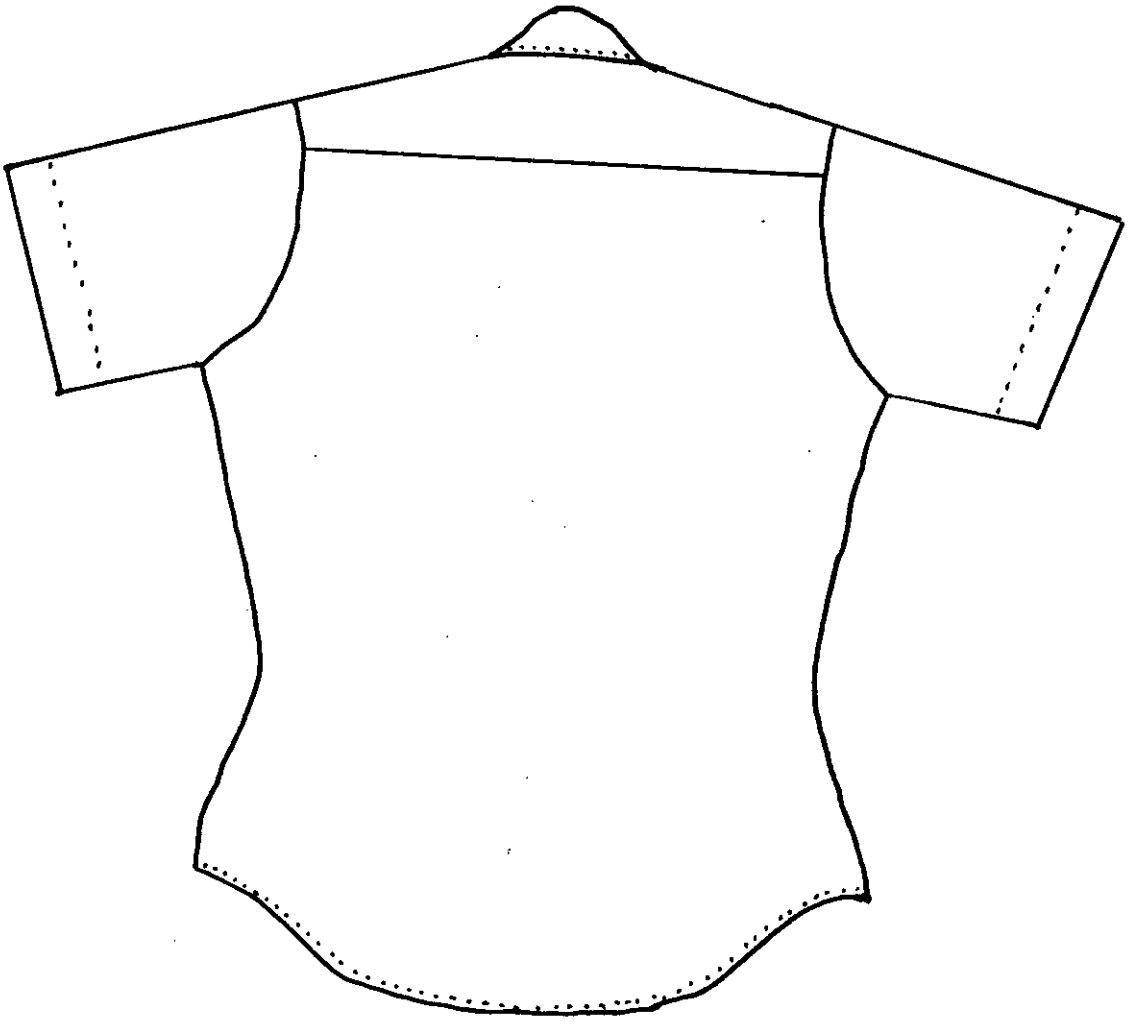


FIGURE 2. CLASS 1 SHIRT (BACK VIEW)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:03Z
Check the source to verify that this is the current version before use.

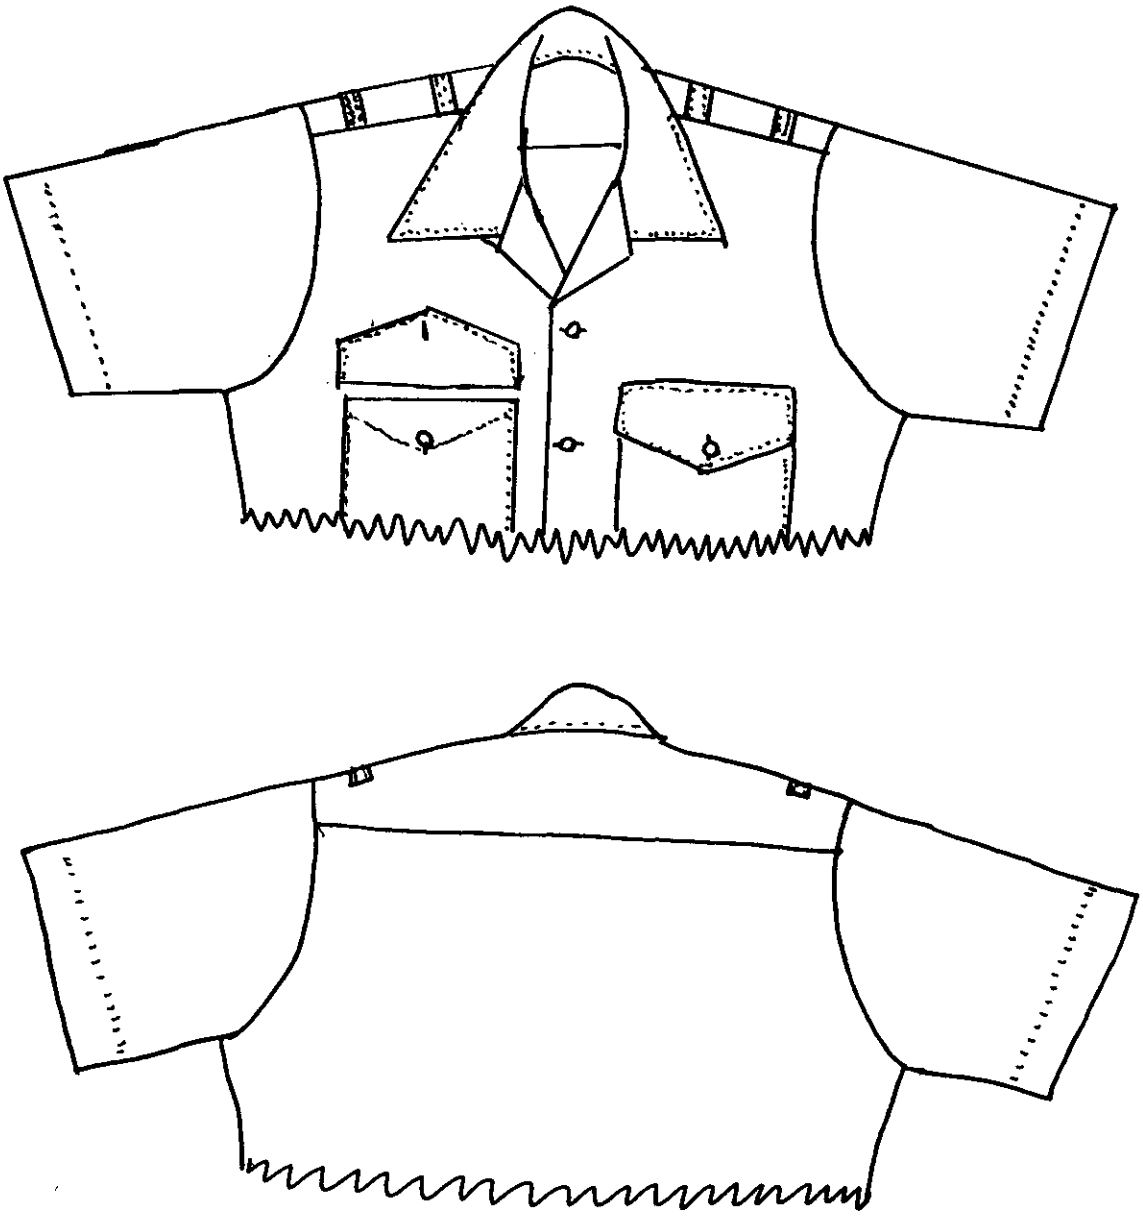


FIGURE 3. CLASS 2 SHIRT

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:03Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing and Textile Research Facility
21 Strathmore Road (Code 50)
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 202640-20T03:03Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-24928	SHIRT, MAN'S, SHORT SLEEVE, POLYESTER/COTTON (DURABLE PRESS)

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:03Z
Check the source to verify that this is the current version before use.