INCH POUND

MIL-S-24948A
10 February 1993
SUPERSEDING
MIL-S-24948
29 Sept. 1989

MILITARY SPECIFICATION

SLACKS, WOMEN'S (WITH SIDE POCKETS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for women's side pocket slacks with straight and bell bottom legs.

1.2 Classification. The slacks shall be of the following types, classes and sizes (body types and lengths) (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

1.2.1 Types.

Type I - Straight leg
Type II - Bell bottom leg

1.2.2 Classes.

Class 1 - Polyester, White 3006
Class 2 - Polyester/cotton, White 3053
Class 3 - Polyester/wool, Blue 3346
Class 4 - Polyester/cotton, Khaki 3729

1.2.3 Sizes.

Body type
Juniors - J
Misses - No designation
Women's - W

Length
Petite (Short) - P
Regular - R
Tall (Long) - T

Schedule of sizes

Misses		
Petite (P)	Regular (R)	Tall (T)
4	4	4
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16
18	18	18
20	20	20

Womens		
Petite (P)	Regular (R)	Tall (T)
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16
18	18	18

Juniors		
Petite (P)	Regular (R)	Tall (T)
10	10	10
12	12	12
14	14	14
16	16	16

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:13Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50186	Cloth, Buckram, Woven and Non-Woven
A-A-52094	Thread, Cotton
V-F-106	Fasteners, Slide, Interlocking
NN-P-71	Pallet, Material Handling, Wood, Stringer, 2 way and 4 way (Partial)
DDD-L-20	Label; for Clothing, Equipage, and Tentage (General Use)

MILITARY

A-A-50199	Thread, Polyester Core: Cotton-, or Polyester-Covered
MIL-P-15011	Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-24910	Cloth, Tropical: Polyester and Wool
MIL-C-29127	Cloth, Twill, Polyester/Cotton (Crease Resistant Finish)
MIL-C-43718	Cloth, Polyester; Polyester and Cotton, Polyester and Rayon, for Pockets
MIL-C-87052	Cloth, Twill, Polyester, White
MIL-C-87059	Cloth, Nylon, Tricot

STANDARDS

FEDERAL

FED-STD-191	Textile Test Methods
FED-STD-751	Stitches, Seams, and Stitchings

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:13Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105	Sampling Procedures and Table for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized Unit Loads
MIL-STD-656	Provisions for Evaluating Quality of Slacks, Women's
MIL-STD-2073-1	DoD Materials Procedures Development and Application of Packaging Requirements
MIL-STD-2073-2	Packaging Requirement Codes

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades For Sewing Threads

Department of Defense Standard Shades For Buttons

(Applications for copies should be addressed to the Color Association of the United States, 409 W 44th St., New York, NY 10016-0927).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

TECHNICAL MANUAL OF THE AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

Method No. 135 - 1987 - Dimensional Changes in Automatic Home Laundering of Woven and Knit Fabrics

(Applications for copies should be addressed to the AATCC National Headquarters, P.O. Box 12215, Research Triangle Park, NC 27709-9989).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material.

3.3.1.1 Class 1 slacks. The material for the class 1 slacks shall be a texturized polyester twill conforming to MIL-C-87052, shade White 3006.

3.3.1.2 Class 2 slacks. The material for the class 2 slacks shall be a polyester/cotton twill conforming to MIL-C-29127, shade White 3053.

3.3.1.3 Class 3 slacks. The material for the class 3 slacks shall be a polyester/wool tropical conforming to MIL-C-24910, shade Blue 3346.

3.3.1.4 Class 4 slacks. The material for the class 4 slacks shall be a polyester/cotton twill conforming to MIL-C-29127, shade Khaki 3729.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

3.3.2 Liner and Lining Material.

3.3.2.1 Pockets and left fly lining. The material for the pockets and left fly lining shall be a twill cloth conforming to class 1 of MIL-C-43718. The color shall be as follows:

Class 1 and 2 - white
Class 3 - dark grey or black
Class 4 - unbleached, white, or natural

3.3.2.2 Slack liner. The material for the liner in the class 1 slacks shall be nylon tricot warp knit, shade white 3006, conforming to MIL-C-87059.

3.3.3 Fusible interlining. The waistband shall be fused with a woven or nonwoven thermal bonded fusible material consisting of 85-100% polyester with the remaining fiber being nylon. The material shall be free of chemical binders. The fusible adhesive system shall be a polyester paste dot uniformly distributed over one side of the material. The color shall be white for the class 1 and 2 slacks, dark grey or black for the class 3 slacks, and unbleached, white, or tan for class 4 slacks. The total weight of the nonwoven fusible shall be 1.1 $\pm$ .2 oz/yd^2. The fused sample, consisting of fusible interlining and base fabric, shall conform to the requirements stated below when tested as specified in Table III.

Component Testing Requirements

Appearance of fused samples 1/
  Initial 2/ - No evidence of bubbling or delamination of the bond, change of color, or strike through.
  After 5 launderings 2/ - No evidence of bubbling or delamination of the bond, change of color, or strike through.
  After 5 dry cleanings 2/ - No evidence of bubbling or delamination of the bond, change of color, or strike through.
Bond strength 3/
  Initial - 22 oz. minimum
  After 5 launderings - 18 oz. minimum
  After 5 dry cleanings - 18 oz. minimum
Shrinkage After 3 launderings - 2.5% maximum
  After 3 dry cleanings - 2.5% maximum

1/ Applies to quality conformance and in-process tests.
2/ After evaluation for initial appearance and shrinkage, samples may be used for the remainder of the appearance tests.
3/ When a nonwoven fusible is used, the item will be accepted if the fusible either splits from itself rather than separates from the basic material or if it begins to separate from the basic material higher than the minimal bond strength and then splits from itself.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

3.3.4 Tape, waistband, non-slip. The woven non-slip tape for the waistband shall be constructed of either polyester or polyester/nylon, natural or white in color, with two rows of chloroprene or nitrile rubber threads, woven or stitched to the tape. The width of the completed tape shall be 7/8 inch and shall not shrink more than 2% for dry cleaning or 3.5% for laundering when tested as specified in 4.4.1. There shall be a minimum of 3/16 inch from the rubber thread to edge of tape.

3.3.5 Thread polyester covered. Thread for seaming, stitching, and overedging shall be cotton-covered polyester core, ticket No. 50 and 70, 2 ply; and for button and buttonhole stitching ticket No. 30, 2 ply conforming to A-A-50199. The color of the thread shall be as follows, in accordance with the Standard Shades for Sewing Threads:

Class 1 and 2 - White AH, CA# 66050
Class 3 - Black AA, CA# 66043
Class 4 - Khaki P-1, CA# 66019

The use of polyester-covered polyester core thread is not allowed.

3.3.5.1 Automatic pocket machine. When an automatic pocket machine using stitch type 101 is used, the thread shall be IC2, ticket No. A, 3 ply conforming to A-A-52094. When an automatic pocket machine using a 301 stitch type is used, the thread shall be ticket No. 50, 2 or 3 ply conforming to A-A-50199. The Cable No. Shall be as stated in 3.3.5.

3.3.5.2 Colorfastness. The dyed threads shall show colorfastness to laundering and light equal to or better than the standard sample when tested as specified in A-A-50199 or A-A-52094. As a minimum level of acceptability, or when no standard sample is available, the thread shall show a minimum of "good" colorfastness to laundering and light when tested as specified in A-A-50199 or A-A-52094.

3.3.6 Slide fasteners.

3.3.6.1 For class 1 slacks only. The slide fastener shall conform to type I, style 1a (continuous chain) or 3 (pre-assembled), short tab pull, size LS, of V-F-106. The slide fastener shall be a continuous monofilament nylon or polyester coil. The component parts of the slide fastener shall approximate the color of the basic material, of the color of the coil may be clear. The style 1a (continuous chain) requires the application of a slider and bottom stop during production of the slacks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

3.3.6.2 For class 2, 3 and 4 slacks. The slide fastener for the class 2, 3 and 4 slacks shall conform to type I, style 1 or 1a (continuous) or 3 or 4 (preassembled), short tab pull, size LS, of V-F-106. All metal components of the slide fastener shall be brass, except for the cover and spring on a semi-automatic pin lock which shall be stainless steel. All component parts shall be from the same contractor (see 4.4.1). Style 1 and 1a require the application of a slider and bottom stop during production of the slack.

3.3.6.3 Color. The color of the slide fastener tape shall approximate the shade of the basic material.

3.3.6.4 Colorfastness. The dyed slide fastener tape shall show colorfastness to laundering equal to or better than the standard sample when tested as specified in V-F-106. As a minimum level of acceptability, or when no standard sample is available, the tape shall show a minimum of "good" colorfastness to laundering when tested as specified in V-F-106.

3.3.7 Labels.

3.3.7.1 Combination label. Each pair of slacks shall have a combination identification, instruction, and personal label conforming to type VI, classes 10 and 14 of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply. The inscription shall be as follows;

NAME:
SERVICE NO:
SLACKS, WOMEN'S (WITH SIDE POCKETS)
FIBER CONTENT: 50% POLYESTER/50% COTTON (EXAMPLE)
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (If other than contractor)

CLASS 1 SLACKS

Machine wash. Permanent press cycle, hot wash. Do not mix colors. Fill machine with clothes to 2/3 capacity. Use heavy duty soap or detergent. Prespot stains with a laundry stain pretreatment. If needed, use a non-chlorine bleach. Tumble dry using a warm setting or shape and hang dry. Remove at once from dryer. If touch-up ironing is needed, use a warm iron.

or

Follow NAVEDTRA Manual 414-01-45-81, Formula II.

CLASS 2 AND 4 SLACKS

Machine Wash - Normal Cycle - Warm Water
Do Not Bleach - Tumble Dry
Medium Heat - Remove Promptly

or

Follow NAVEDTRA Manual 414-01-45-81, Formula II.

Source: https://assist.dla.mil -- Downloaded: 20260410-20T03:13Z
Check the source to verify that this is the current version before use.

CLASS 3 SLACKS
Machine Wash Permanent Press Cycle - Warm Water (120^0F. max)
Do Not Bleach - Tumble Dry - Medium Heat - Remove Immediately
May also be Dry Cleaned
or
Follow NAVEDTRA Manual 414-01-45-81, Formula III.

3.3.7.2 Size label. The size label shall conform to type VI, class 2 of DDD-L-20. The label shall indicate size (body type and length) and stock number, and shall bear the following inscription:

SIZE: 14JT (Example- 14 Junior Tall) or 14T
(Example - 14 Misses Tall)
STOCK NO: 8410-00-000-0000 (EXAMPLE)

Note: Abbreviations for the applicable lengths shall be P for Petite, R for Regular, and T for Tall. Abbreviations for the applicable body types shall be J for Juniors and W for Womens.

3.3.7.3 Removable size ticket. Each slack shall have a commercial type size ticket attached to the outside of the waistband above the left back darts. The ticket shall be approximately 3 inches long and 1 inch high, made of a suitable plain white cardboard. The corners of the ticket may be double perforated for ease in tacking. The size (12R - Example) shall be printed or stamped on the upper left hand corner in black or blue ink. The lettering for the size shall be 1/4 inch in height. Abbreviations for length shall be allowed in accordance with 3.3.7.2.

3.3.8 Hook and eye. The hook and eye for waistband shall be North and Judd (Hook Flex H-49 and E-50), Universal Fastener, Inc. (#8 hook with #8 eye or #85 eye), Akim Co. (Slim-Slack with MB eye and Slik-Slak), or equal. The finish of both components shall be nickel plate. Prior to the use of the "or equal" item, the contractor shall submit the item to the contracting officer with supporting data for approval (see 4.4.1).

3.4 Design. The slacks shall have front and back waist darts, quarter top pockets on each front at hips, two section waistband with seat seam outlet, and a front closure slide fastener. Type I slacks have belt loops on the waistband. Type I, classes 3 and 4 slacks have double welt style hip back pockets. Type I, class 2, 3 and 4 slacks have straight legs, and a liner extending from the waistband to the bottom of the pockets. Type II, class 1 slacks have bell bottom legs. All slacks are unhemmed. The type II slacks are pressed inside out with side creases. (See Figures 1, 2, and 3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

3.4.1 Figures. The figures are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3 and 6.5). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification. The patterns allow a 1/2 inch seam allowance for all seams, except as otherwise indicated in Table I. The patterns provide a seat seam allowance of 1 to 1-1/4 inch at the waist tapering to 1/2 inch at the crotch.

List of pattern parts

Material	Pattern Nomenclature	Cut parts
Basic material	Front	2
	Back	2
	Waistband	2
	Side pocket bearer	2
	Side pocket facing	2
	Left fly	1
	Right fly facing	1
	Hip pocket bearer/facing (classes 3 and 4 only)	4
Cloth, twill	Side pockets	2
	Left fly lining	1
	Hip pockets (classes 3 and 4 only)	2
Fusible material	Waistband interlining	2
Liner material (class 1 only)	Front liner	2
	Back liner	2

NOTE: Patterns are not furnished for type I belt loops. See Table I, operation 1 for their requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

3.6 Construction.

3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation, any one of them may be used. Seam allowances shall be maintained with seam sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the slacks. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitchings. Edgestitching and topstitching shall be 1/16 to 1/8 inch from edge except as otherwise specified. The bight of the overedge stitching shall be 3/16 inch. The guide and knife shall be set to trim only the ravelled ends of the fabric. The length of the bartacks shall be 1/4 to 3/8 inch and the width shall be 1/8 ($\pm$ 1/32) inch wide.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitchings shall be back tacked not less than 3/8 inch. The ends of a continuous line of stitching (except label) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than 3 stitches, or shall run past the label 1/2 inch. Thread breaks (all stitch types) shall be repaired by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired by using 301 stitch type. The seat seam shall be completely resewn. Thread ends at lower end of darts shall not be trimmed closer than 1/2 inch in length or when automatic dart machine is used, the thread ends at lower end of dart shall be backstitched a minimum of 3 stitches.

3.7 Manufacturing operations requirements. The slacks shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished slacks are identical to that produced by following the sequence listed in Table I. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification.

3.7.1 Pressing. Pressing, where specified in Table I, shall be accomplished with a heated pressing iron or machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

3.7.2 Fusing. All fusing of the fusible to the basic material shall be done on a single ply basis (no stacking allowed). The statement "Press in accordance with the directions of the manufacturer" refers to time, temperature, and pressure.

3.8 Abbreviations in table of operations. The abbreviations used in Table I are as follows:

Stch	-	Stitch
In	-	Inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
Smlr	-	Similar
Btn	-	Button
Btnhl	-	Buttonhole
Incl	-	Including
Dbl	-	Double
Chnstch	-	Chainstitch

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cutting. a. Cut the slacks in strict accordance with patterns furnished, which shall show size, placement of component parts, directional lines for cutting, and notches for proper assembly of parts. Drill holes are permitted for darts, and shall not be less than 3/8 inch from end of dart. b. Cut all basic material parts of the slacks out of the same piece of material, except right fly facing, left fly, belt loops, pocket facings and hip pocket bearer/facing (classes 3 and 4), which may be cut from ends. Parts cut from ends shall approximate the shade of the slacks. c. Place fronts and backs so that the directional line is in the warp direction. The directional line may vary from the warp direction by not more than 1 inch on fronts and backs. Measurement shall be taken from the top and bottom of the directional line on the pattern to the selvage edge of the fabric. The difference between the two measurements shall not exceed the tolerance specified.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	d. The belt loops (type I only) shall be cut of sufficient width to comply with operation 13. NOTE: The cut width of the belt loops will depend on the method used in operation 13. e. Cut the left fly lining on the straight or on the bias.				
2.	Shade marking. a. All parts of the basic material shall be marked or ticketed to insure a uniform shade and proper assembly throughout the slacks, except parts cut from ends, which shall approximate the shade of the slacks. b. The use of corrosive metal fastening devices, adhesive type tickets which leave traces of paper or adhesive on the material, or sewn-on tickets for shade marking is prohibited. c. The use of ink pad numbering machine, rubber stamp, or pencil is acceptable provided the numbers do not show on the outside of the slacks. Whenever possible, numbers shall be covered by the seam allowance.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
3.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-656 shall be removed from production and replaced with non-defective and properly matched components.					
4.	Overedge stitching. (Type I)					
	a. Overedge stitch the raw edges of outseams and inseams of fronts and backs, bottom edge of each leg and left front edge of forepart.	503 or 504 or 602	EFd-1	8-10	70	70
	b. Overedge stitch the raw edges of crotch seam and seat seam.	503 or 504 or 602	EFd-1	8-10	70	70
	(Type II) c. Position front liner on fronts even with cut edges and overedge (within the seam allowance) The top edge, crotch seam fly edge, inseam, and outseam.	502 or 503 or 504	EFd-1 and SSa-1	8-10	70	70
	d. Position the back liner on backs even with cut edges and overedge (within the seam allowance) the top edge, inseam, outseam, and seat seam.	502 or 503 or 504	EFd-1 and SSa-1	8-10	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. The liner may be basted or pinned to their respective parts provided it is done in the seam allowance and does not show on the finished garment. NOTE: When a knife is used on the serging machine, the gauge shall be set so that the ravelled ends are trimmed but the edge of the fabric is not cut off.					
5.	Make darts. The darts shall be tapered on the inside without twists or puckers.					
	a. Fold and stitch darts as indicated by patterns.	301 or automatic dart mchne	OSf-1	10-12	50	50
	b. Press folded darts toward the center front and center back respectively. NOTE: (Type II only) The darts in the lining shall be folded with and stitch-ed to their respective fronts and backs.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:13Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
6.	Attach side pocket facings, side pocket bearer, and label.					
	a. Place facings and pocket bearers on pocketing aligning with notches on pocket bag.					
	b. Turn under inside raw edges of facings and bearers 1/4 to 5/16 inch and stitch 1/16 inch from folded edge. Facings and bearers with selvage edges need not be turned under. Continue stitching across bottom raw edge.	301	LSd-1 and LSa-1	10-12	50	50
	c. Stitch the combination label on all four sides to the bottom of right side pocketing. The label shall face the wearer when worn. The stitching shall not be through the printing.	301	LSbj-1	10-12	50	50
7.	Attach side pockets.					
	a. Seam raw edge of pocket assembly to each front at opening, 1/2 (± 1/16) inch from edge, from step to top of pocket. Pocket bag will extend above the slacks 3/8 inch. Notch bottom of seam at step through all plies including outseam allowance of foreparts. Notching shall not extend beyond the width of seam.	301	SSe-2(a)	10-12	50	50

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:13Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Turn pocket to the inside and edgestitch 1/4 to 3/8 inch from folded edge. Stitching on each seam shall extend full length of the opening.	301	SSe-2(b) (shows finished seam)	10-12	50	50
8.	Hang side pockets.	301 or 401	SSae-2(a)	10-12	50	50
	a. Align edge of pocket opening with notch of pocket bearer and with edges of pocket even at bottom of opening at outseam. Trim ends of facing and bearer at each lower pocket opening, eliminating bulk. Turn and fold pocketing, face side out. Seam bottom and rounded sides 3/16 to 1/4 inch from raw edge.				50	70
	b. Turn pocket to finished position.					
	c. Baste across top of bearer.	301		6-8	50	50
	d. Upper portion of pocket shall extend into the waistband, finish smooth, flat, and be sewn to the seam allowance of waistband and slacks.					
9.	Make flies.					
	a. Overedge back edge of right fly facing.	503 or 504 or 602	EFd-1	8-10	70	70

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:13Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. When style 3 or 4 (pre-assembled) slide fastener is used: Double stitch back edge of fastener tape to right fly facing. The edge of the chain shall be 3/8 to 1/2 inch from front edge of the finished fly. The bottom stop shall finish approximately 1/4 inch above the fly notch. The top stop shall be placed no further than 1/4 inch from waistband joining seam.	301 or 401	SSau-2	10-12	50 50	50 70
	c. When style 1 or 1a (continuous chain) slide fastener is used: Double stitch back edge of fastener tape to right fly facing. The edge of the chain shall be 3/8 to 1/2 inch from front edge of finish fly. The coil shall extend past the fly notch at the bottom, and extend into the waistband at the top (removal of the teeth is permitted inside the waistband). The coil may be clipped below the fly notch to enable slider to be put on following center front seaming.	301 or 401	SSau-2	10-12	50 50	50 70
	d. Stitch left fly and left fly lining pieces together, face to face, along curved edge, with a 1/4 inch seam allowance. Turn to finished position.	301 or 401	SSe-2(a)	10-12	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:13Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. Place fastener tape on back edge of left fly, and overedge all plies together.	503 or 504 or 602	EFd-1	8-10	70	70
10.	Sew on right and left flies.					
	a. Sew on left fly assembly to left front with notches matching, catching fastener tape in the seam, with a 3/8 inch seam allowance.	301	SSa-1	10-12	50	50
	b. Sew on right fly facing to right front, face to face, with notches matching, with a 3/8 inch seam allowance.	301	SSa-1	10-12	50	50
	c. Turn right fly facing to the inside with seam 1/16 to 1/8 inch back of folded edge and press front edge flat without damage to slide fastener chain.					
	d. As an alternate to operation c, turn the seam onto the fly piece and stitch 1/8 inch from edge, starting from top raw edge of fly to bottom of fly notch. Stitching shall not be visible on the front of the slacks.	301	LSq-2(b)	10-12	50	50
11.	Make hip pockets (classes 3 and 4). Finished appearance - The pockets shall be uniform in width and shall finish 6-1/4 ± 1/4 inches deep. Ends of openings shall be neatly finished without raw edges or pleats.					

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T03:13Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	Operation 11 cont. The right and left pockets shall be in horizontal alignment. The top of pocketing shall extend not less than 1/2 inch into the waistband and be caught in the bottom stitching of the waistband. The pocket openings shall finish 5-1/4 (± 1/8) inches. NOTE: The hip pocket bearer/facing pattern pieces are used in two locations in the construction of the pocket: 1) to act as bearer and 2) to simultaneously act as facing while forming the pocket welts.					
	a. Turn in lower raw edge of hip pocket bearer piece and seam to pocket at notches as indicated on patterns. When bearer is cut on selvage, the edge need not be turned in (Figure 3, Illustration A).	301	LSd-1	10-12	50	50
	b. Position hip pocket facing as indicated by patterns and stitch to slacks through pocket on the underside with two rows of stitching (Figure 3, Illustration B).	301	SSV-2	10-12	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Cut opening between the rows of stitching through all plies, turn facing through opening and raise stitch, forming a 1/8 to 3/16 inch welt on lower edge of opening (Figure 3, Illustrations C, D, and E).	301	SSe-2 shows finished seam	10-12	50	50
	d. Turn in raw edge of hip pocket facing and seam to pocket. When facing piece is cut with selvage, the edge need not be turned in (Figure 3, Illustration E).	301	LSd-1	10-12	50	50
	e. Fold pocket, stitch side edges and turn to finished position (Figure 3, Illustration F).	301	SSe-2(a)	10-12	50	50
		or 401			50	70
	f. Smooth out pocket and topstitch sides 1/4 to 3/8 inch from edges. Stitching may extend across bottom folded edge of pocket. The ends of the bearer and facing piece shall be caught in the topstitching only (Figure 3, Illustration G).	301	SSe-2(b)	10-12	50	50
	g. Using the facing, form a 1/8 to 3/16 inch welt on upper edge of pocket opening and raise stitch the seam through slacks, facing piece, pocket bearer and pocket, closing top of pocket (Figure 3, Illustration H).	301	SSbe-2	10-12	50	50

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T03:13Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	h. Tack ends of pocket opening through welt, bearer and pocket.	301		10-12	50	50
	OR					
	i. Operations b and c above may be accomplished with a double welt pocket machine which stitches, cuts and turns welts in one operation. The machine manufacturer's recommended pocket stay material may be used. The joining seam of the lower welt piece shall be raise stitched through back and welt piece and the joining seam of the top welt piece shall be raised through all plies in the closing of the top of pocket. Ends of pocket opening shall be securely tacked.	101 and 301		10-12	50 50	 50
12.	Join outseams.					
	a. Match notches of front and back at outseam and join 1/2 (± 1/16) inch from edge. Free edge of pocketing shall not be caught in the seaming.	301 or 401	SSa-1	10-12	50 50	50 70
	b. Press outseams open and flat. Place edge of pocket even with the edge of the back outseam allowance and overedge stitch pocket to back seam.	503 or 504 or 602	SSa-1	8-10	70	70
	c. Edgestitch bottom of bag to notch, taking care not to include outseams.	301	SSa-1	10-12	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:13Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
13.	Make belt loops - Type I only (see operation 1d).					
	a. Make loops by folding a piece of the basic material in half with the edges abutted and double stitch not less than 1/4 inch gauge with a covering stitch on the underside. The finished stripping shall measure 5/16 to 3/8 inch in width.	406	EFh-1	10-12	50	50
	OR					
	b. Fold stripping in half with edges turned under along one side and stitch 1/16 inch from each folded edge. The finished stripping shall measure 5/16 to 3/8 inch in width.	301 or 401	EFp-2	10-12	50	50
14.	Make waistband.					
	a. Position fusible interlining to the underside of the waistband and press in accordance with the directions of the manufacturer.					
	b. Overedge stitch the inside edge of the waistbands.	503 or 504 or 602	EFd-1	8-10	70	70
	c. Overedge stitch the front edge of right waistband	503 or 504 or 602	EFd-1	8-10	70	70
	d. Fold waistband in half lengthwise and press.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:13Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. Position top edge of non-slip waistband tape on the overedged side of waistband, 1/8 inch down from pressed edge. Stitch 1/16 inch from each edge of tape. The tape extends end to end on the left waistband, and from the center back to 2-3/4 inches from front edge on right waistband. The rows of rubber gripper threads shall face the wearer.	301 or 401	LSbj-1	10-14	70 70	70 70
15.	Attach waistband and belt loops (Type I only) a. The Type I slacks shall have five belt loops for sizes up to and including size 8, and seven loops for size 10 and above. The loops shall be positioned as follows: - one loop on each front centered between side seam and front closure - one adjacent to each side seam on back of slacks - one on waistband with center of loop aligned with seat seam (see operation 19) - (Size 10 and up) one on each back centered between side seams and center back seam					

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:13Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Stitch the right and left waistbands to slacks 3/8 inch from raw edges, catching the ends of the belt loops (except center back loop), when applicable, and the tops of the front pocketing in the stitching. The left waist-band extends 1/4 inch past the left fly. The right waistband lines up evenly with the right fly. Both waistbands line up evenly with the center back.	301 or 401	SSa-1	10-12	50 50	70 70
	c. When applicable, drop belt loops and securely stitch or bartack the loops 3/16 to 5/16 inch below the waistband seams. The stitching or tacking shall not extend beyond the width of the loop.	301 or brtck auto-matic loop tacker		10-12 21-28 per brtck 24-28	50 50 50	50 50 50
16.	Attach hook and eye. a. Finished appearance - The hook and eye shall be attached to the waistband so that when both parts are engaged, the closure does not bulge, twist, pucker, or distort the waistband or front of the slacks. b. Attach hook to the in-side portion of the right waistband, centered on the width, with the roll-ed edge of the hook align-ed with slide fastener chain. Attach through a suitable reinforcement.					

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T03:13Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Attach the eye to the outside portion of the left waistband, centered on the width, aligned with the slide fastener chain, to correspond with the hook on the right waistband. Attach through a suitable reinforcement.					
17.	Finish flies and assemble slide fastener.					
	a. Raise stitch the left fly joining seam, catching the fly lining in the stitching.	301	LSq-2(b)	10-12	50	50
	b. For use with style 1 or 1a (continuous chain) slide fastener: Attach slide fastener, and with the chain even, apply bottom stop. The stop shall finish approximately 1/4 inch above fly notch.					
	c. Fold the front edge of the left waistband face to face, and stitch 1/4 inch from raw edge. The front edge shall finish even with the edge of the left fly. Turn, and work out corners.	301	SSa-1	10-12	50	50
	d. Fold the front end of the right waistband back against itself, face to face, in line with front edge of right fly. Stitch across, forming the top of waistband (stitching will be positioned in the center of the unturned waistband). Turn, and work out corners.	301	SSa-1	10-12	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. Stitch the "J" stitching on the right fly, positioned 1-1/4 (± 1/8) inches from front edge of fly, extending from the top of the waistband, curving to the fly notch. f. Finished appearance - The top corners of the right and left waistband shall be completely forced out and shall not be bulky. Waistband shall finish 1-1/8 - 1-1/4 inches wide. The "J" stitching of the right fly shall be uniformly spaced from edge of fly. The seam joining the right fly facing to the front shall not be exposed on outside of slacks when fastener is closed. The flies shall be smooth without twist, puckers, or excessive fullness.	301		10-12	50	50
18.	Join inseams. a. Match notches at front and back inseams and stitch 1/2 (± 1/16) inch from the edge. b. Press inseams open and flat.	301 or 401	SSa-1	10-12	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:13Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	BOB/ LPR
19.	Join and measure crotch/ seat seam. Finished appearance - The seat shall be joined with proper tension resulting in sufficient elasticity of seam to meet strain encountered in sitting or stooping. The waist shall be measured before seat seam is joined to assure correct waist size. In joining the seat seam, the right and left waist-band joining seam shall be aligned.					
	a. Join the crotch and seat seam with a double needled seat seamer, with the two rows of stitching 1/64 to 1/32 inch apart, starting at base of fly and continuing the stitch -ing completely across waistband lining. The inseams shall not be out of alignment by more than 3/8 inch. The seam from the waistband joining seam to the end of the waistband lining shall be perpendicular (90^0 angle) to the waistband joining seam.	401	SSa-2	8-10 each nee-dle	50	70
	b. Press crotch and seat seam open.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
20.	Finish waistband and attach size label.					
	a. Position waistband in finished position. Edge-stitch the waistband joining seam 1/16 inch above the seam, catching back pocketing in stitch-ing, with the ends at center back folded inside. The waistband joining seam allowance shall be folded up. Stitching ex-tends from the end of the left waistband to the "J" stitching on the right waistband. The stitching shall not extend across the right fly. The pocket -ing shall finish smooth.	301	SSay-2(b)	10-12	50	50
	b. Edgestitch 1/16 from edge, the left fly from top of waistband to base of fly. The fly lining shall not be exposed on the front of the fly.	301	LSq-2(b)	10-12	50	50
	c. Edgestitch the top of the waistband 1/16 inch from folded edge. The stitching shall extend from the end of the left waistband to the "J" stitching on the right waistband. The stitching shall not extend across the right fly.	301	OSf-1	10-12	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Stitch the top edge of the size label to the lower edge of waistband above the left front pocket. The end of the stitching need not be tacked provided the stitching extends at least 1/2 inch beyond each end of the label. The stitching shall not be through the printing.	301		10-12	50	50
21.	Apply bartacks and finish pocket stitching.					
	a. Apply a horizontal bartack superimposed on the base of the "J" stitching, across crotch seam.	Brtck		28 per brtck	50	50
	b. Bartack or tack the lower corner of the left fly to the right fly facing. Position the bartack or tack to relieve the tension placed upon the slide fastener (approximately 1 inch from the base of the fly bartack at 45 degrees from the horizontal.)	Brtck or 101		28 per brtck 4 min.	50 50	50 50
	c. Apply a horizontal bartack to bottom of front pocket opening, placed slightly across outseam.	Brtck		28 per brtck	50	50
	d. Apply a horizontal bartack at top of front pocket opening, maintaining a pocket opening of 5-1/2 (± 1/8) inches for all sizes.	Brtck		28 per brtck	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:13Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. Place two rows of edge stitching along pocket from top bartack (operation 22d) to waistband, the first row 1/16 inch from edge, the second row corresponding to operation 7b.	301	SSc-2	8-10	50	50
22.	Attach center back loop and secure remaining loops (Type I only). a. Position center back loop centered over seat seam.					
	b. Stitch or tack center back loop 3/16 to 5/16 inch below waistband seam. The stitch shall extend the width of loop not beyond. The underside of loop shall face upwards and the edge shall abut the bottom edge of waistband.	301 or brtck		10-12 28 per brtck	50 50	50 50
	c. Turn under top edge of all belt loops with folded edge positioned even with the top folded edge of waistband and stitch or tack loop thru all plies of waistband. Bartack or stitching shall be 1/8 ± 1/16 inch below fold of belt loop.	301 or brtck or automatic loop		10-14 28 per brtck 28 per brtck	50 50 50	50 50 50
	d. Belt loop inside opening shall finish 1-3/8 to 1-1/2 inches between bartacks.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:13Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
23.	Attach removable size ticket. Attach removable size ticket to outside of waistband above the back left darts, tacking all four corners.	Hand or Mchne	2-4 stitches per tack 6-8 stitches per tack		
24.	Cleaning. a. All ends of stitching shall be trimmed and loose threads removed from slacks. b. All spots and stains shall be removed. Shade tickets shall be removed without injury to the material. NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result.				
25.	Press slacks. a. The tops of the slacks, including fly and pockets, shall be pressed smooth. b. Type I slacks - The legs shall be pressed smooth and creased in the center with the seam matching at the bottom and in the crotch; or the inseams in the crotch may be slightly back of the outseam.				

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:13Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF SLACKS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	c. Type II slacks - Turn slacks inside out, and press one leg at a time with fronts on top of backs keeping inseam and outseam allowances open and flat. Crease along back edge of outseam of outseam allowance. The creases (outseam and inseam) shall be on the backs. The inseam and outseam shall be pressed and and handle in such a manner that the seams remain open after press-ing.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

3.9 Sizes and measurements. Unless otherwise specified, finished measurements of slacks shall be as listed in Table II (see Figures 1 and 2). All measurements and tolerances are expressed in inches.

Table IIA Type I - Sizes and measurements

Size	(A)Waist	(B)Hip Junior	(B)Hip Misses	(B)Hip Women	(D)Bottom
4	24 1/2	-	38	-	19
6	25 1/2	-	39	41	19 1/4
8	26 1/2	-	40	41 1/2	19 1/2
10	28	40	41 1/2	43 1/2	19 3/4
12	29 1/2	41 1/4	43	45 1/2	20
14	31	43	44 1/2	46 1/2	20 1/4
16	33	45	46 1/2	48 1/2	20 1/2
18	35	-	48 1/2	50 1/2	20 3/4
20	37	-	50 1/2	-	21
Tolerances:	± 1/2	± 1/2	± 1/2	± 1/2	± 1/4

Table IIB Type II - Sizes and measurements

Size	(A)Waist	(B)Hip Junior	(B)Hip Misses	(B)Hip Women	(C)Knee Type II	(D)Bottom Type II
4	24 1/2	-	36 3/4	-	18 1/4	21 1/2
6	25 1/2	-	37 3/4	39 3/4	18 1/2	21 3/4
8	26 1/2	-	38 3/4	40 3/4	18 3/4	22
10	28	38 3/4	40 1/4	42 1/4	19	22 1/4
12	29 1/2	40 1/4	41 3/4	43 3/4	19 1/4	22 1/2
14	31	41 3/4	43 1/4	45 1/4	19 1/2	22 3/4
16	33	43 3/4	45 1/4	47 1/4	19 3/4	23
18	35	-	47 1/4	49 1/4	20 1/4	23 1/4
20	37	-	49 1/4	-	20 1/2	23 1/2
Tolerances:	± 1/2	± 1/2	± 1/2	± 1/2	+ 1/4	+ 1/4

Inseam length (E): All petites (P) - 33 3/4
All Regulars (R) - 34 3/4
All Talls (T) - 37
Tolerances - ± 1/2

NOTE: Waist and hip measurement of the slacks shall be taken with slide fastener fully closed and waistband fastened. All measurements shall be taken with slacks smooth and flat. A, B, D, and E refer to Figures 1 and 2. C refers only to Figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

(A) Waist - Twice the measurement taken in center of waistband from folded edge to folded edge.
(B) Hips - Twice the measurement taken from folded edge to folded edge, at fly bartack. The measurement shall be taken with slacks smooth, flat, and held snug.
(C) Knee - Twice the measurement taken from folded edge to folded edge, across the width of the slack leg, 22 1/4 inches up from the bottom of the slacks.
(D) Bottom - Twice the measurement taken from folded edge to folded edge across unhemmed bottom of leg.
(E) Inseam - Length measurement taken along inseam from crotch seam to unhemmed bottom of legs.

3.10 Workmanship. The finished slacks shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable point values.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility For Inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3)
2. Quality conformance inspection (see 4.4)

4.3 First article inspection. The first article, submitted in accordance with 3.2, shall be inspected as specified in 4.4.1 for compliance with design, construction, workmanship, appearance and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. A certificate of compliance will be acceptable for the hook and eye requirements of 3.3.8, and the slide fastener requirements of 3.3.6.2. In addition, testing shall be performed on the fusible component listed in Table III and in accordance with characteristics noted. The methods of testing specified in FED-STD-191, wherever applicable and as listed in Table III shall be followed. All requirements are applicable to the sample unit. All test reports shall contain the individual values used in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following:

Component	Lot expressed as	Sample unit for testing
Fusible interlining	Yards	Two 24 by 24 inch specimens 1/

1/ Prepared by the contractor during the same period and under the same conditions as for the fusing of the end item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

Table III - Component testing

Component	Characteristic	Requirement Paragraph	Test method
Interlining fused to basic material	Construction	3.3.3	1/
	Appearance	3.3.3	Visual
	Weight	3.3.3	5041
	Bond strength		
	Initial	3.3.3	5951
	After 5 launderings 2/ 3/	3.3.3	AATCC TM 135- 1987 and 5951
	After 5 dry cleanings	3.3.3	5580 and 5951
	Shrinkage		
	After 3 launderings	3.3.3	AATCC TM 135-1987
	After 3 dry cleanings	3.3.3	5580
Non-slip tape	Shrinkage		
	Laundering	3.3.4	AATCC TM 135-1987 VA 1/
	Dry cleaning	3.3.4	TM 5580 1/

1/ A certificate of compliance will be acceptable for this requirement.
2/ Pressing and shrinkage requirements shall not apply.
3/ For Laundering, use 3V. Tumble dry on Permanent Press Cycle. Complete 3 cycles of laundering and drying.

4.4.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are carried out as specified. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated nonconformance.

4.4.2.1 Sample size. The size of the fused check sample shall correspond to the total area covered by the waistbands which are fused at one time on the press.

4.4.2.2 Number of check samples. One check sample shall be prepared following fusing of every 1000 waistbands or once every four hours, whichever occurs first.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

4.4.2.3 Appearance of the fused check sample. Each check sample shall be visually inspected for color change, bleed through, bubbling, and delamination. If there is any evidence of these conditions present, the previously fused pieces represented by the sample shall be inspected for the above conditions. Any fused part exhibiting one of the above conditions shall be removed from the lot (see 3.3.3).

4.4.3 Examination of the end item. Examination of the end item shall be performed in accordance with the provisions and defects for Dress (D) slacks in MIL-STD-656 and the defect below:

Removable size ticket missing, incorrect, or illegible	3 points
Slide fastener chain misplaced (set too high or too low) or coil/stops not positioned as specified	2 points
Evidence of bubbling, delamination, change of color, or strike through on waistband due to fusible interlining	3 points

4.4.4 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply and Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 2.5, expressed in term of defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of flags, loose strapping, improper taping, inadequate stapling, bulged or distorted containers.
Content	Number of items per shipping container is more or less than required. Size shown on one or items not as specified on shipping container. 1/

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:13Z
Check the source to verify that this is the current version before use.

1/ For this defect, one item from each shipping container in the sample shall be examined.

4.4.5 Palletization examination. An examination shall be made to determine that palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1, and the acceptable quality level, (AQL) expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each pair of slacks shall be neatly folded so that the garment measures approximately 11-1/2 by 15 inches. Type I shall be packaged right side out, with the removable size ticket size ticket visible. Type II slack shall be packaged inside out, with the combination label on right pocket visible. Each pair of folded slacks shall be inserted in a snug-fitting flat clear polyethylene film bag of 0.00125 inch thickness (± 20% tolerance). The bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other. The final closure of the bag shall be heat sealed with the seam made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. As an alternate for the class 3 slacks, the polyethylene bag may be of the tuck-in or reverse flap type, in which a heat seal closure and corner vent hole are not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial. Slacks shall be preserved in accordance with ASTM-D 3951.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

5.2.1 Level A Packing. Fourteen (14) pairs of slacks of one type, class, and size shall be packed in a fiberboard shipping container, conforming to style RSC-L, grade V2s of PPP-B-636. Slacks shall be stacked two in length, one in width, and seven in depth within the shipping container. Each container shall have the contents completely covered on top and bottom with a sheet of commercial grade kraft paper. Each box shall be waterproofed and reinforced in accordance with the Appendix of PPP-B-636.

5.2.2 Level B Packing. Fourteen (14) pairs of slacks of one type, class, and size (body type and length) only, preserved as specified in 5.1, shall be packed in a shipping container, conforming to style RSC-L, type CF (Variety SW) or SF, class domestic, grade 275 of PPP-B-636. Slacks shall be stacked two in length, one in width and seven in depth within the shipping container. Each container shall have the contents completely covered on top and bottom with a sheet of commercial grade kraft paper. Each box shall be closed in accordance with Method II as specified in the appendix of PPP-B-636.

5.2.3 Commercial packing. Slacks, preserved as specified in 5.1, shall be packed in accordance with ASTM-D 3951.

5.3 Palletization. When specified (see 6.2) slacks packed as specified in 5.2.2 and 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type 1a of MIL-STD-147. Pallet types shall be type I (4-way entry) type IV or type V in accordance with MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding methods C and D or Film bonding F and G. Pallet patterns shall be in accordance with the appendix of MIL-STD-147.

5.4 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads shall be marked in accordance with MIL-STD-129

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

5.5 MIL-STD-2073. When specified (see 6.2), Preservation and Packaging shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The slacks are intended for wear by female military personnel of the Department of the Navy.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.
b. Types, classes and sizes (body types and lengths) required (see 1.2).
c. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article inspection is required, the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity, and testing and approval of the first article.
e. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
f. When palletization is required (see 5.3).
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.5).

6.3 Patterns. For access to patterns, address the procurement office issuing the invitation for bids.

6.4 Polyester khaki slacks are available as optional items and shall meet the requirements specified through the Certification Program

6.5 Body type and length abbreviations. The body type and length abbreviations in this specification follow the current industry practice of one digit abbreviations (Example - 14WP). The size designation on the patterns indicates a one digit length abbreviation and a two digit body type abbreviation.

Source: https://assist.dla.mil -- Downloaded: 202640-20T03:13Z
Check the source to verify that this is the current version before use.


6.6 Subject term (key word) listing.
Pants, polyester
Pants, polyester/cotton
Pants, polyester/wool
Trousers
Uniform

Custodian:
Navy - NU

Preparing activity:
DLA - CT

Project No. 8410-0805

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.

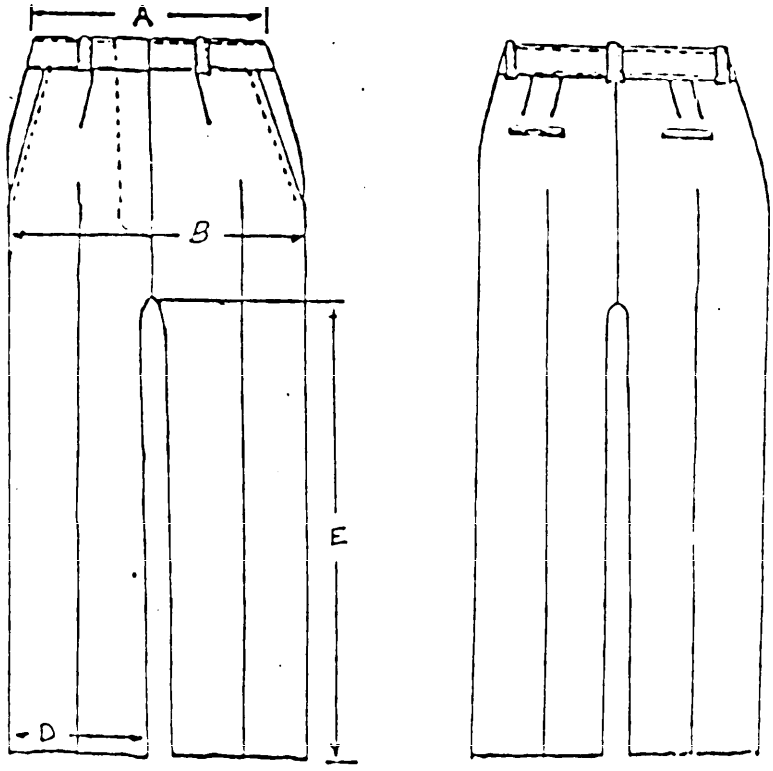

Note: The class 2 slacks do not have back pockets.

Figure 1 - Slacks, Women's (with Side Pockets)
Type I - Straight Leg

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:13Z
Check the source to verify that this is the current version before use.


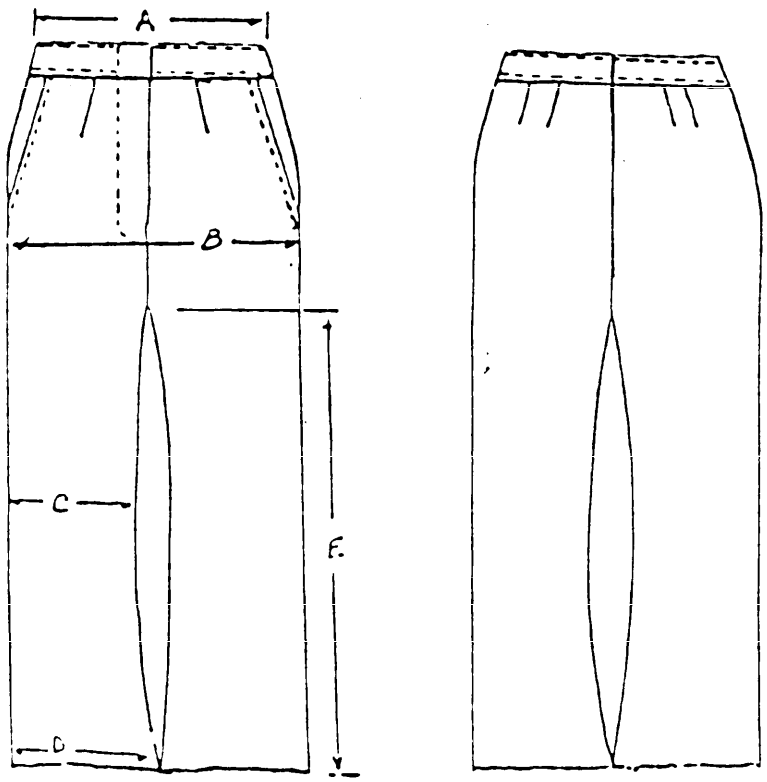


Figure 2 - Slacks, Women's (with Side Pocket)
Type II - Bell Bottom Leg

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:13Z
Check the source to verify that this is the current version before use.

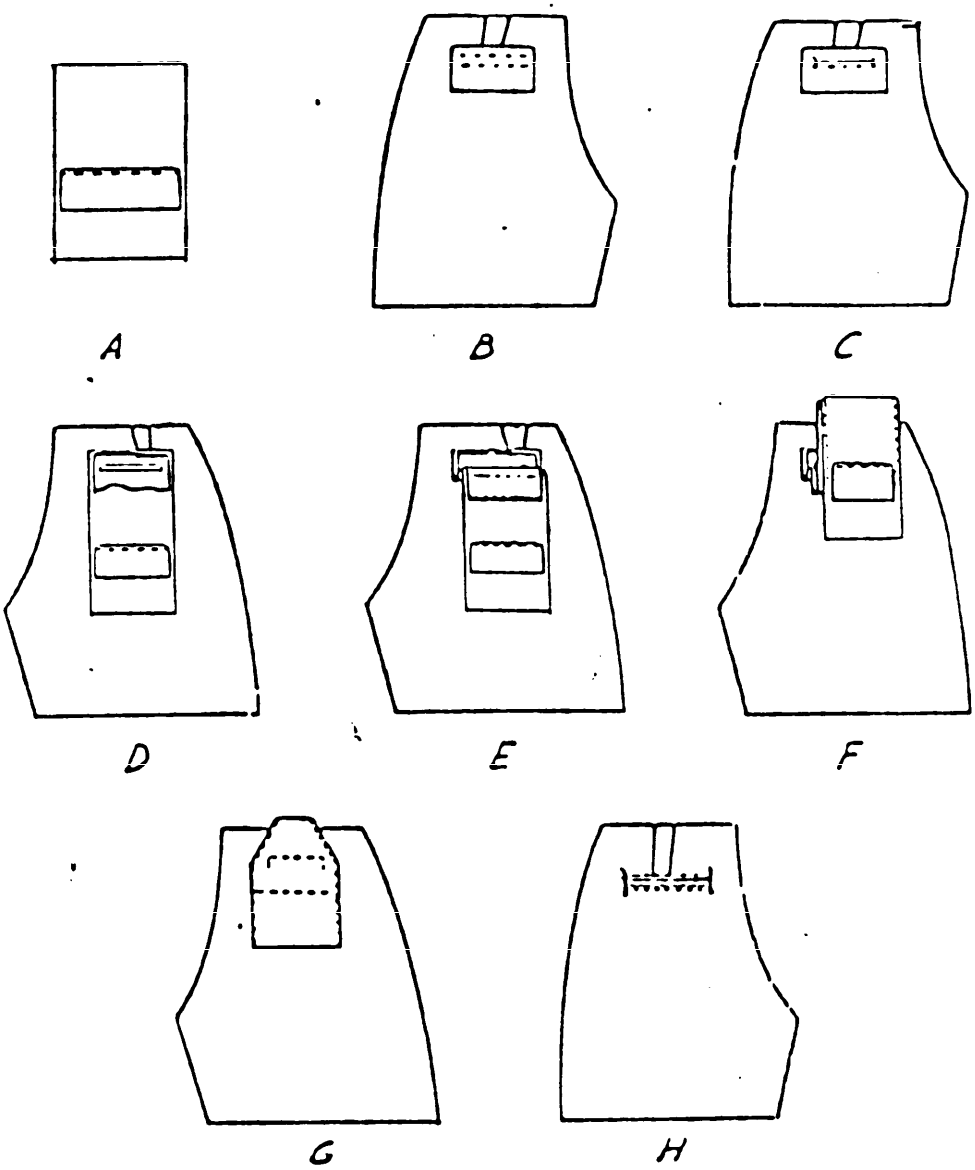

HIP POCKET

A - Bearer on pocket
B - Facing piece on outside of slacks
C - Facing piece cut through and notch
D - Facing piece turned inside
E - Lower welt made
F - Pocket closed
G - Pocket turned to inside & topstitched on side
H - Upper welt opening stitched through pocket

Figure 3 - Slacks, Women's (with Side Pocket)

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T03:13Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-S-24948A	930210

3. DOCUMENT TITLE
SLACKS, WOMEN'S (WITH SIDE POCKETS)

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:13Z
Check the source to verify that this is the current version before use.