MILITARY SPECIFICATION

SHIRT, MAN'S, DRESS WHITE, LONG SLEEVE (CG)

This specification is approved for use by the United States Coast Guard, Department of Transportation, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a man's white poly/cotton poplin shirt.

1.2 Classification. The shirt shall be of one type only, in the following sizes and sleeve lengths (see 6.2).

1.2.1 Schedule of sizes. The shirts shall be furnished in the following neck sizes:

12, 12 1/2, 13, 13-1/2, 14, 14-1/2, 15, 15-1/2, 16, 16-1/2, 17, 17-1/2, 18, 18-1/2

1.2.2 Schedule of sleeve lengths. The shirts shall be furnished in sleeve lengths of 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, and 38.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC/NA FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole and Button, Staple (Plastic)
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction 2 Way and 4 Way (Partial)
DDD-L-20	- Label; for Clothing, Equipage and Tentage (General Use)
PPP-B-676	- Boxes, Setup

MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-21881	- Cloth, Poplin, Polyester and Cotton
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon- or Polyester-Covered
MIL-C-43594	- Cloth, Interlining, Polyester
MIL-P-55010	- Plastic Sheet, Polyethylene Terephthalate

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-105	- Sampling Procedures and Tables For Inspection by Attributes
MIL-STD-147	- Palletized Unit Loads
MIL-STD-2073-1	- DOD Materials Producers For Development and Applications of Packaging Requirements
MIL-STD-2073-2	- Packaging Requirement Codes

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS

U.S. Postal Service Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades For Sewing Threads

Department of Defense Standard Shades For Buttons

(Applications for copies may be obtained from the Color Association of the United States, 343 Lexington Ave. New York, NY 10016-0927.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, (see 6.2), a sample shall be subjected to first article inspection, in accordance with 4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

3.3 Material.

3.3.1 Basic cloth. The basic material for the shirt shall be a polyester/cotton poplin, 4.1 to 4.6 oz. shade White 3013 conforming to type II, class 2 of MIL-C-21881.

3.3.2 Interlining. The material for interlining the collar, collarstand and cuffs shall be polyester fiber cloth conforming to MIL-C-43594. The color shall be white.

3.3.3 Thread. The thread for seaming, stitching, buttonholes, and button sewing shall be a cotton-covered or rayon-covered polyester thread, ticket No. 70, 2 ply, conforming to MIL-T-43548. The polyester-core polyester covered thread is not allowed. The thread shall be dyed to match White AB, Cable No. 66050 in accordance with the Department of Defense Standard Shades for Threads.

3.3.3.1 Colorfastness of thread. The finished thread shall show colorfastness to laundering, perspiration and light equal to or better than the standard sample when tested as specified in MIL-T-43548. As a limit of acceptability or when no standard sample is available, the finished thread shall show a minimum of "good" colorfastness to laundering, perspiration and light when tested as specified in MIL-T-43548.

3.3.4 Buttons. The buttons used for the fronts and cuffs shall be type II, 19 line, class k, style 25 of V-B-871. The buttons shall match Shade White BA, Cable No. 62031, in accordance with the Department of Defense Standard Shades for Buttons.

3.3.5 Collar stays. The collar stays shall be made from polyethylene terephthalate plastic sheet conforming to MIL-P-55010, except the thickness shall be 0.010 ± 0.001 inch, the color shall be natural (clear or opaque) and the transparency and optical properties shall not apply. The stay shall measure not less than 1/2 inch or more than 5/8 inch wide and 2 7/8 to 3 inches in length when tested as specified in 4.4.1. Both ends shall be round, pointed, cut on an angle or any combination thereof. When other than round, points shall be rounded.

3.3.6 Labels.

3.3.6.1 Combination label. Each shirt shall have a combination personal/identification/instruction label conforming to type VI, classes 10 and 15 of DDD-L-20. The marking shall show colorfastness to laundering. The inscription and format shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

NAME:
SERVICE NO:
NAME OF ITEM: SHIRT, MAN'S, DRESS WHITE, LONG SLEEVE (CG)
FIBER CONTENT: 65% POLYESTER 35% COTTON
CONTRACT NO: DLA 100-00-0-0000 (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (IF OTHER THAN CONTRACTOR)

LAUNDERING INSTRUCTIONS

MACHINE WASH - WARM WATER, - NO BLEACH
TUMBLE DRY - MEDIUM HEAT - REMOVE PROMPTLY

3.3.6.2 Size label. Each shirt shall have a size label conforming to type IV or VI, class 2 of DDD-L-20. The inscription shall be as follows:

13 - 29 SL (EXAMPLE)
STOCK NO. 8405-00-000-0000 (EXAMPLE)

The abbreviation for sleeve length shall be SL.

3.4 Design. The shirt shall be a six button, dress style shirt. It shall have collar stay pieces, a collarstand, a left front pocket and long sleeves. The sleeves shall have continuous bindings on openings and convertible cuffs with two buttonholes in each cuff. (see Figure 1).

3.4.1 Figure. Figure 1 is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are allowed on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification. The standard patterns provide an allowance of 1/4 inch for all seams except for the sleeve facing seam which shall be 3/8 inch. Unless otherwise indicated in Table II, seams shall be in accordance with these seam allowances.

3.5.1 List of pattern parts. The component parts of the shirt shall be cut from the materials as specified and in accordance with the number of parts required for the manufacturing process as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

Table I - List of pattern parts

Material	Nomenclature of Pattern Parts	Cut Parts
Cloth, Poplin, Polyester and Cotton	Back	1
	Front	2
	Back yoke	2
	Sleeves	2
	Collar	2
	Collarstand	2
	Collar stay piece	2
	Pocket	1
	Top cuff	2
	Under cuff	2
	Sleeve facing	2
Interlining cloth	Collar interlining	1
	Collarstand interlining	1
	Cuff interlining	2
Templates	Template finished pocket	-
	Template buttonhole marker	-

3.6 Construction.

3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types, as specified in Table II shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitchings are given for the same operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the shirt. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitching. Unless otherwise specified, edgestitching and topstitching shall be 1/16 to 1/8 inch from folded edge. The bight of the overedge stitching shall be 3/16 inch. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitchings. The guides and knives on the safety stitch machine shall be set to trim only the ravelled ends of the fabric. Buttonholes shall be clean cut and the stitching shall be securely caught in the fabric.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitching, when not caught in other seams or stitchings, shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching (except label) shall be overlapped not less than 1/2 inch. The ends of label stitching shall be overlapped not less than 3 stitches. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired by using 301 stitch type. When ends of overedge stitching are not caught in other seams or stitching, the ends shall be tacked.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table II.

3.6.4 Buttonholes. The buttonholes shall be straight style with both ends securely barred. The finished cut length shall be 1/2 to 9/16 (± 1/16) inch.

3.7 Manufacturing operations requirements. The shirt shall be manufactured in accordance with operation requirements specified in Table II. The contractor is not required to follow the exact sequence of operations provided the finished shirt is identical to that produced by following the sequence as listed in Table II. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification.

3.7.1 Shade and size marking. The component parts of the shirt shall be marked or ticketed to insure a uniform shade and size throughout the garment. Any method may be used except:

(1) Corrosive metal fastening devices
(2) Sew-on shade tickets
(3) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment and wherever possible, is covered by the seam allowance.

3.7.2 Abbreviations in table of operations. The abbreviations used in Table II are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
1.	Cutting a. All components of the basic cloth shall be cut in strict accordance with patterns furnished, which show size, shape, placement of pockets, directional lines for cutting and notches for proper assembly of all parts. b. Cut the components from one piece of material, except for the under ply of collar, collarstand, cuffs and yoke which may be cut from ends. Parts cut from ends shall approximate the shade of the main assembly. The binding for the sleeve facing may be roll cut providing that the finished width of the binding conforms to the measurements cited in operation 10d and matches the shade of the main assembly. Splicing of the material is not permitted. c. The component parts cut from the basic poplin cloth shall finish with the face side of the material on the outside.					
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in section 4 shall be removed from production and replaced with non-defective and properly matched material.					
3.	Shade and size markings a. All parts shall be marked or ticketed to insure proper shade and size identification, except parts cut from ends.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
4.	Assemble breast pocket and attach to front.					
	a. Fold the top edge of pocket inward as indicated by pattern marks forming the hem. Stitch with a single row of stitching, 1/16 inch from the bottom folded edge.	301	EFb-1	10-14	70	70
	b. The pocket may be creased on an edge creasing machine to insure uniformity of size and shape before stitching to the shirt.					
	c. Folding in raw edges 1/2 (± 1/16) inch, set pocket to shirt according to marks on patterns, edgestitching 1/16 inch from folded edge along the bottom and sides.	301	LSd-1	10-14	70	70
	d. Backstitch 1/4 inch at each end of the pocket opening with the backstitching superimposed upon pocket stitching.	301	Similar to LSd-2	10-14	70	70
	or					
	e. The top corners of the pocket may be tacked with a triangle stitching. The base of the triangle (1/8 to 3/16 inches long) shall be at the top of the pocket with the apex 1/2 to 3/4 inches below the top of the pocket.	301	Similar to LSd-2	10-14	70	70
	f. The finished pocket shall measure 5 1/4 (± 1/8) inches in length at center, 4 1/2 (± 1/8) inches in length at sides and 4 1/2 (± 1/8) inches in width at top of pocket for all sizes.					
	NOTE: The finished pocket shall be checked for size and uniformity against the pocket template.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
5.	Make fronts and attach back yoke.					
	a. Sandwich back between back yokes and stitch back, through all plies 1/4 inch from raw edges.	301	SSa-1	10-14	70	70
	b. Overedge left and right shirt fronts. Fold shirt fronts according to notches to form facings and press to inside.	503 504 or 602	EFd-1	8-12	70	70
	c. Sandwich fronts between back yokes and stitch through all plies, 1/4 inch from raw edges.	301	SSa-1	10-14	70	70
6.	Assemble collar.					
	a. The stays shall be positioned so that on the finished shirt they are at a 25 to 30 degree angle from the front edge of the collar and the tapered ends are fitted into the collar points. The construction shall be as follows:					
	b. Superimpose collar stay piece onto inside of undercollar and stitch collar stay tunnel according to marks on pattern for stay placement. Insert the slotted stay into the tunnel.	301	SSv-2	10-14	70	
	c. Center interlining to back of topcollar.					
	d. Join the collar together with the topcollar and undercollar pieces face to face, and with collar stay piece superimposed against the undercollar. Stitch together along outside edges 1/4 inch from the raw edge.	301 or 401	SSe-2(a)	10-14	70	70
	e. Trim corners, turn to finished position working out points.					
	f. Topstitch around the top and side edges of collar, 1/8 inch from the folded edge. The stay shall not be caught in the topstitching.	301	SSe-2(b)	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
7.	Make collarstand and attach collar.					
	a. Superimpose interlining to underside of collarstand. Place collar between the top and under side of collarstand (with interlining) as indicated by notches on pattern and stitch from end to end along top edge of collarstand, 1/4 inch from edge.	301 or 401	SSq-2(a)	10-14	70	70
	b. Turn collarstand to finished position and topstitch 1/16 inch from folded edge. The stitching may continue around the ends of the collarstand.	301	SSq-2(b)	10-14	70	70
8.	Attach collar to shirt.					
	a. Stitch the neck edge of the under ply (with attached interlining) of the collar stand to the neck edge of the shirt, 1/4 inch from the edge.	301	SSa-1	10-14	70	70
	b. Turn to finished position and stitch 1/16 inch from the turned edge the top ply of the collarstand to the shirt with the raw edge of the collarstand turned under 1/4 inch.	301	LSb-1	10-14	70	70
	c. The finished collar shall measure as follows: - Width at center back (measurement taken from top of collarstand to edge of collar) 2 (± 1/8) inches. -Length of points shall not vary more than 1/16 inch.					
	d. Stamp the size label inscription as specified in 3.3.6.2 inside center back of collarstand. There shall be no evidence of the printing visible on the outside of the finished collar as worn.					
	or					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
	e. Simultaneously center and catch the size label in the stitching between the collarstand and neck edge of the shirt (operation 8a). NOTE: There shall be no evidence of the collar stay protruding into the fold of the finished top collar.					
9.	Set sleeves to armholes.					
	a. Stitch the sleeves to the armholes according to marks on patterns, 1/4 inch from raw edges.	301 or 401	SSa-1	10-14	70	70
	b. Overedge stitch the raw edges together.	503 504 or 602	SSa-1	8-12	70	70
	or					
	c. Operations 9a and 9b may be performed in one operation by simultaneously stitching and overedging.	515 516 or 519	SSa-2	8-12	70	70
10.	Attach sleeve facings.					
	a. Align the raw edges of the underside of the sleeve opening and sleeve facing and stitch 3/8 inch from edges.	301	BSq-2(a)	10-14	70	70
	b. Turn facing up to finished position folding in raw edge 3/8 inch. Topstitch 1/16 inch from edge.	301	BSq-2(b)	10-14	70	70
	or					
	c. As an alternate, bind the edge of the sleeve opening with the raw edges of the facing turned under 3/8 inch.	301	BSc-1	10-14	70	70
	d. The finished facing shall measure 3/4 (± 1/16) inch in width.					
	e. Turn facing to inside of sleeve. Stitch, bartack or tack through facing and sleeve 1/8 to 1/4 inch below top of opening, the full width of the facing.	301 or bartack		10-14 21-28 Stchs/ brtck	70 70	70 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
11.	Join sides and sleeve seams.					
	a. Stitch raw edges of sides and sleeve seams face to face, 1/4 inch from edges.	301 or 401	SSa-1	10-14	70	70
	b. Overedge stitch the raw edges together.	503	SSa-1	8-12	70	70
	or	504 or 602				
	c. Operations 11a and 11b may be performed in one operation by simultaneously stitching and overedging.	515 516 or 519	SSa-2	8-12	70	70
12.	Make and attach cuffs.					
	a. Position cuff interlining to underside of top cuff. Turn back edge of top cuff over interlining and stitch through all plies, the width of the cuff, 1/4 (± 1/16) inch from the folded edge.	301 or 401	SSbc-1	10-14	70	70
	b. With right sides together, stitch bottom cuff to top cuff/interlining assembly, 1/4 inch from raw edges.	301 or 401	SSe-2(a)	10-14	70 70	70 70
	c. Trim corners and turn to finished position.					
	d. Turn and stitch the bottom and side edges of cuff 1/16 inch from folded edge. The stitching on the side of the cuff shall finish 1/2 (± 1/8) from the top edge of finished cuff or edge stitching may taper to edge of cuff. Ends of stitching need not be backtacked.	301	SSe-2(b)	10-14	70	70
	e. Stitch top edge of bottom cuff to the bottom edge of sleeve 1/4, inch from the raw edges.	301	SSa-1	10-14	70	70
	f. Turn cuff to finished position and stitch 1/16 inch from the folded top edge to bottom of sleeve on the outside.	301	LSb-1	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
13.	Hem bottom of shirt.					
	a. Form a hem on the bottom of shirt with raw edge turned under 1/8 inch and the bottom edge of the facing caught in the hem. Hem stitching shall be 1/16 inch from the folded edge along the top of the hem.	503 504 or 602	EFb-1	10-14	70	70
	b. The finished hem shall measure 1/8 to 3/16 inch wide and shall be backtacked (see 3.6.2).					
14.	Make buttonholes.					
	a. Make six (6) vertical buttonholes through left front, 3/4 (± 1/16) inch from folded edge and positioned in accordance with the buttonhole marker template. The template shall be used only on the completely assembled shirt.	Btnhl		42-46 per Btnhl including tack	70	70
	b. Make one horizontal buttonhole at top left front through collarstand, with the inside cut edge of the buttonhole to finish 7/16 (± 1/16) inch from the finished front edge.	Btnhl		42-46 per Btnhl including tack	70	70
	c. Make and center one horizontal buttonhole in each end of cuff, with the inside cut of the buttonhole to finish 3/8 to 1/2 inch from the end of the cuff.	Btnhl		42-46 per Btnhl including tack	70	70
15.	Attach buttons.					
	a. Sew six (6) buttons securely to right front through all plies with the center of each button 3/4 (± 1/8) inch from the front edge. Each button shall be positioned in the center of the corresponding buttonhole.	101	-	20-22 per button	70	-
		or				
		301	-	14-16 per button	70	70
	b. Sew one button to top right front of collarstand, through all plies, to correspond with the buttonhole at the top left front. The button shall be centered with the center of the button 5/8 (± 1/8) inch from the finished front edge. The button shall be positioned to the left of center of the buttonhole.	101	-	20-22 per button	70	-
		or				
		301	-	14-16 per button	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
	c. One centered on each cuff bottom (side of cuff next to exposed sleeve facing) with the center of the button 1/2 (± 1/8) inch from the end of the cuff.	101 or	-	20-22 per button	70	-
		301	-	14-16 per button	70	70
	NOTE: The buttons shall align evenly with corresponding buttonholes, so as to assure a neat and smooth closure.					
16.	Attach combination label. (see 3.3.6.1) a. Position the combination label on outside of left front so that on the finished shirt the bottom of the label shall be 1/2 to 3/4 inch from the hemmed bottom and the side of the label shall be 1 1/4 to 2 inches from the front folded edge. Stitch around all four sides, 1/8 to 3/16 inch from the edge. The stitching shall not be through the printing.	301	LSbj-1	10-14	70	70
17.	Clean shirt. a. Trim all thread ends.					
	NOTE: Care shall be taken when triming to ensure that damage to the fabric does not result.					
	b. Remove all loose threads.					
	c. Remove all spots, stains and size markings.					
18.	Press and prepare for packaging a. Press shirt with a heated pressing iron or machine.					
	b. Button shirt and fold for packaging.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. The finished buttoned shirt shall conform to the dimensions specified in Table III (see Figure 1). All measurements are expressed in inches

Table III - Sizes and finished measurements

Size	A Chest	B Back Length	C Collar
12	16 5/8	30 7/8	12 1/2
12 1/2	17 5/8	31	13
13	18 5/8	31 1/8	13 1/2
13 1/2	19 5/8	31 1/4	14
14	20 5/8	31 3/8	14 1/2
14 1/2	21 5/8	31 1/2	15
15	22 5/8	31 5/8	15 1/2
15 1/2	23 5/8	31 3/4	16
16	24 5/8	31 7/8	16 1/2
16 1/2	25 5/8	32	17
17	26 5/8	32 1/8	17 1/2
17 1/2	27 5/8	32 1/4	18
18	28 5/8	32 3/8	18 1/2
18 1/2	29 5/8	32 1/2	19
Tolerance	± 1/2	± 1/4	± 1/4

	D Sleeve length										
	28	29	30	31	32	33	34	35	36	37	38
Size											
12	28	29	30	31	32	33					
12 1/2	28	29	30	31	32	33					
13	28	29	30	31	32	33	34				
13 1/2	28	29	30	31	32	33	34	35	36	37	
14	28	29	30	31	32	33	34	35	36	37	38
14 1/2		29	30	31	32	33	34	35	36	37	38
15		29	30	31	32	33	34	35	36	37	38
15 1/2		29	30	31	32	33	34	35	36	37	38
16		29	30	31	32	33	34	35	36	37	38
16 1/2			30	31	32	33	34	35	36	37	38
17					32	33	34	35	36	37	38
17 1/2					32	33	34	35	36	37	38
18					32	33	34	35	36	37	38
18 1/2					32	33	34	35	36	37	38
Tolerance	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

NOTE: Measurements A, B and D shall be taken with the shirt fully buttoned and laid flat and smooth. Measurement C shall be taken with the shirt unbuttoned.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

(A) Chest - Measurement shall be taken across the front at base of the armhole from folded edge to folded edge.

(B) Back length - Measure from the neckline seam to the bottom of the shirt along the center back.

(C) Collar - Measurement shall be taken from center of the collar button to the front cut edge of buttonhole with the collar in a flat position.

(D) Sleeve length - With sleeve extended, measurement shall be taken from the center back at undercollar seam to bottom of sleeve.

3.9 Workmanship. The finished shirts shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to acertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. The contractor shall furnish a certificate of compliance for the collar stay requirements of 3.3.5. All requirements are applicable to the sample unit and the lot shall be unacceptable if one or more sample units fail to meet any test requirement specified. All test reports shall contain the individual values utilized in expressing the final results.

4.4.2 Examination of the end item. The item shall be examined for the defects listed in 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL'S) shall be as indicated in 4.4.2.3. The sample unit shall be one finished shirt. The lot size shall be expressed in units of one shirt.

4.4.2.1 Visual examination. The shirt shall be examined for defects in design, material, construction, workmanship and marking and the defects classified in accordance with the list below. The terms "outside" and "inside" as used throughout this examination are defined as follows:

Outside Any part of shirt that is visible when the completely buttoned and closed shirt is examined.

Inside Any part of shirt that is not visible when the completely buttoned and closed shirt is examined.

Defect	Classification Major	Minor
I MATERIAL DEFECT AND DAMAGE		
a. Hole, cut, tear, smash, burn, drill hole, scorched area or open place:		
1. On outside (longest dimension in any direction):		
(a) Up to 1/4 inch, inclusive		X
(b) More than 1/4 inch	X	
2. On inside (longest dimension in any direction):		
(a) More than 1/4 inch		X
3. Knot or slub on outside		X
b. Misweave, area of no dye penetration, dye streak,		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
missing yarn, broken yarn, visible mend, thin place, shade bar; on outside. 1/		X
c. Loose yarn, snagged thread, coarse yarn or woven in waste 1/		X
d. Embedded crease of a permanent nature in cloth		X
e. Needle chew on outside (largest dimension in any direction):		
1. Up to 1/2 inch, inclusive		X
2. More than 1/2 inch	X	
II SHADED PARTS		
a. Any part required to be cut from one piece of material, shaded	X	
b. Variation in shade within an outside part or between outside parts 1/		X
c. Under ply of collar, collarstand, cuffs and yoke do not approximate the shade of shirt.		X
III CLEANNESS		
a. Spot or stain on outside	X	
b. Three or more thread ends not trimmed to 1/4 inch or less on outside	X	
c. Five or more thread ends not trimmed to 1/2 inch or less on inside		X
d. One or more shade or size tickets not removed		X
IV CUTTING		
a. Any component part not cut in conformance with specification requirements	X	
V COMPONENT AND ASSEMBLY		
a. Any component part omitted or required operation omitted (unless otherwise classified)	X	
b. Any component part twisted, distorted, pleated, misshaped, tight or full (unless otherwise classified)		X
c. Any component not as specified (type, size, color etc)	X	
d. Any operation not performed as specified (unless otherwise classfied)		X
e. The edge of any component part required to be forced out having folds (unless otherwise classified)		

1/ This defect shall not be scored on undercollar or below bottom button

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
1. More than 1/8 inch		X
VI PRESSING		
a. Omitted, poorly pressed, not pressed as specified or exhibiting a double crease line	X	
b. Seams not pressed flat		X
VII SEAMS AND STITCHING		
a. Accuracy of seaming:		
1. Seam irregular, twisted, pleated, or wavy on outside	X	
2. Seam puckered (score only when on major portion of seam)		X
3. Any part of shirt caught in an unrelated operation or stitching		X
4. End of stitching when not caught in other seam or stitching backstitched less than 3/8 inch		X
5. Thread break secured by stitching back of the break less than 1/2 inch		X
6. Ends of a continuous line of stitching overlapped less than 1/2 inch		X
7. Wrong or varying shades of specified color thread used on outside of shirt		X
b. Gauge of stitching and seam allowance:		
1. Gauge irregular or not within range specified		X
2. Edge or topstitching sewn too close to edge, resulting in damage to cloth		X
3. Seam allowance greater than 1/16 inch more or less than specified		X
c. Open seam: (Resulting from 2 or more skipped, broken, run-off or missing stitches)		
1. On all seams except bottom hem and label stitching		
(a) Up to 3/4 inch (inclusive)		X
(b) More than 3/4 inch	X	
2. Bottom hem: more than 1/2 inch		X

NOTE: A safety-stitch seam shall be considered open when either the inside stitch or the overedging is broken. A joining seam shall be classified as open when one or more stitches in a seam are broken or runoff, or when two or more continuous skipped stitches occur.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
d. Runoff:		
1. On joining seam score as open seam		
2. Edge or topstitching (When not resulting in an open seam):		
(a) More than 1/2 inch		X
e. Raw edge:		
1. On outside		
(a) Up to and including 3/8 inch		X
(b) More than 3/8 inch	X	
2. On inside		
(a) More than 2 inches	X	
(b) 1/4 inch up to 2 inches inclusive		X
f. Seam and stitch type:		
1. Not specified seam or stitch type	X	
2. Looper thread of 401 stitch type on outside	X	
3. Any required line of stitching omitted	X	
4. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)		X
5. Any seam not lapped or finished as specified		X
g. Broken, missing or skipped stitches on edge or top stitching (when seam is seamed, turned and stitched):		
1. 1/4 inch or more		X
h. Stitch tension		
1. Loose tension resulting in a loose seam	X	
2. Loose tension on top or edge stitching resulting in exposed loose thread		X
3. Tight tension (stitches break when normal strain is applied in direction of seam or stitching)	X	
4. Tight tension; top and bottom thread loops not uniform		X
i. Stitches per inch (to be scored only when the condition exists on more than half the length of seam or stitching)		
1. Less than the minimum	X	
2. More than maximum		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
VIII BUTTONHOLE		
a. Omitted, not specified type, size or not finished as specified	X	
b. Uncut or partially cut buttonhole		X
c. Ragged edges, i.e, yarns or thread ends on inside of buttonholes not trimmed to less than 1/4 inch or basic fabric not caught by buttonhole stitching		X
d. One or more broken stitches or two or more skipped stitches in one or more buttonholes		X
e. Buttonhole stitching extending beyond bartack; stitches per buttonhole less than minimum specified		X
f. Finished cut length not as specified		X
IX BUTTON: One or more		
a. Missing, broken, defective, misplaced, not positioned or attached a specified, or insecurely sewn	X	
b. Stitching on one or more not locked at end of cycle (tug at the loose end of the thread when accessible to determine if it will ravel)		X
X BARTACK OR TACK: One or more		
a. Missing, insecure, misplaced, not specified size or type or not serving intended purpose	X	
b. Loose stitch tension		X
XI MARKING		
a. Not affixed as specified or misplaced		X
b. Missing, incorrect, illegible or strike through	X	
XII COLLAR		
a. Not uniform in size or shape - any point (excluding collar points) varying:		
1. More than 3/8 inch with corresponding point on matching part	X	
2. 1/4 inch up to 3/8 inch (inclusive) with corresponding point on matching part		X
b. Collar points uneven in length by:		
1. More than 1/4 inch up to 3/8 inch (inclusive)		X
2. More than 3/8 inch	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
c. Twisted, not smooth, too full, short or tight causing collar to turn out	X	
d. Collar point not properly forced out	X	
e. Collar off center by: 1/		
1. More than 3/8 inch in depth		X
1/ Center of collar is determined by aligning the two shoulder seams at junction of collar.		
f. Collar tight causing puckers or pleats at neckline		X
g. Ends of collar not properly forced out, i.e., having a fold of		
1. More than 1/8 inch in depth		X
h. One or both collar stays missing	X	
h. Undercollar exposed on outside of topcollar more than 1/16 inch for a distance of more than 1 inch		X
XIII FRONTS		
a. Any button out of alignment with corresponding buttonhole, causing a noticeable bulge		X
b. Lengths of fronts uneven at bottom when buttoned:		
1. 3/8 inch up to 3/4 inch inclusive		X
2. More than 3/4 inch	X	
XIV POCKET		
a. Not uniform in size or shape - any measurement varying from pocket to template by:		
1. More than 1/4 inch	X	
2. 1/8 inch up to 1/4 inch (inclusive)		X
b. Pocket edge not parallel to front edge of shirt by:		
1. More than 3/8 inch	X	
2. 1/4 inch up to 3/8 inch inclusive		X
c. Edge of pocket pleated or twisted		X
d. Pocket corner not secured as specified		X
e. Pocket width or depth not as specified		X
f. Pocket opening gapped		X
g. Width of hem not as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
XV SLEEVES AND ARMHOLE		
a. Sleeve tight causing pleat or excessive puckers on front, back or sleeve	X	
b. Sleeves reversed	X	
c. Construction of sleeve opening:		
1. End of facing not securely caught in sleeve opening, i.e., can be easily pulled away	X	
2. Top of bound opening not stitched across width of facing		X
3. Facing twisted or puckered		X
4. Bound edge of sleeve opening not turned to the inside at end of cuff		X
5. Facing width not as specified		X
6. Sleeve opening not as specified		X
7. Splice visible on sleeve facing		X
XVI BACK YOKE		
a. Back Yoke, fronts and back not attached as specified		X
XVII CUFFS		
a. Button on top side	X	
b. Irregular in width by 1/4 inch or more		X
XVIII BOTTOM HEM		
a. Width not as specified		X
b. Irregular in width by 1/4 inch or more		X
c. Hem twisted, pleated or puckered		X
d. Hem end extending more than 1/8 inch beyond front edge of shirt		X

4.4.2.2 Dimensional examination. The shirt shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from the dimensions and tolerances specified in Table II shall be scored as a size measurement defect.

b. Sleeves uneven in length by 1/2 inch or more shall be classified as a size measurement defect.

4.4.2.3 Inspection levels and acceptable quality levels (AQL's). The inspection levels and acceptable quality levels, expressed in defects per hundred units for visual and dimensional examination shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

	AQL's	Inspection levels
For defects applicable to 4.4.2.1		
Major	2.5	II
Total (Major and minor combined)	10.5	II
For defects applicable to 4.4.2.2 (size measurements)		
One class	4.0	S-3

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing and marking comply with the section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the Acceptable Quality Level shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper location, sequence or method of application. Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as; incomplete closure of container flaps, loose strapping, inadequate stapling or improper taping. Bulged or distorted container. Open and non-continuous heat sealed seams of polyethylene bag or incorrectly fabricated bag.
Content	Number of shirts per shipping container more or less than specified. 1/

1/ For this defect, one container in the sample shall be examined.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5, in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each fully buttoned shirt shall be neatly folded to measure approximately 14-1/2 inches by 10-1/2 inches. The folded shirt shall be secured with stainless steel (AISI type 304 or 316) pins, aluminum clips, or plastic fasteners. Each shirt shall be inserted in a snug-fitting flat style clear polyethylene film bag of not less than 0.00125 inch thickness (± 25 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape.

5.1.1.1 Intermediate packaging. Five (5) shirts of one size and sleeve length only, packaged as specified in 5.1.1 and alternated top to bottom shall be placed in a setup paperboard box conforming to type II, variety 1, class a or c, style 4 of PPP-B-676. Outside dimensions of the setup box, cover included, shall be 14 1/2 inches in length, 11 1/2 inches in width and 3 3/4 inches in depth. The depth of the cover shall be one inch.

5.1.2 Level C. Shirts shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Eight (8) intermediate packages (40 shirts of one size and sleeve length only), packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. The intermediate packages shall be arranged in the shipping container in two stacks, side by side and four high.

5.2.2 Level B. Eight (8) intermediate packages (40 shirts of one size and sleeve length only), packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class domestic, variety DW, grade 275, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

MIL-B-17757. The intermediate packages shall be arranged in the shipping container in two stacks, side by side and four high.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.2.4 Palletization. When specified (see 6.2) item, packed as specified shall be palletized on a 4-way entry pallet in accordance with load type IA of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means C, K, and L or O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood groups I, II, III, or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified, of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

SHIRT, MAN'S, DRESS WHITE, LONG SLEEVE (CG)
STOCK NUMBER:
SIZE:
QUANTITY:

5.4 MIL-STD-2073. When specified, (see 6.2) Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The shirts are intended for wear by male Coast Guard officer and enlisted personnel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and, if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. Sizes and sleeve lengths required (see 1.2).
d. When first article inspection is required (see 3.2) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity and testing and approval.
e. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
f. When palletization is required (see 5.2.4).
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2.

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

6.5 Subject term (key word) listing.
Collar stay
Cuffs
Interlining, polyester
Shirt, Man's, dress
Sleeve, long

Custodian:
Navy - NU

Review activity
DLA - CT

User activity
Navy - CG

Preparing activity:
Navy - NU

Project No. 8405-N085

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

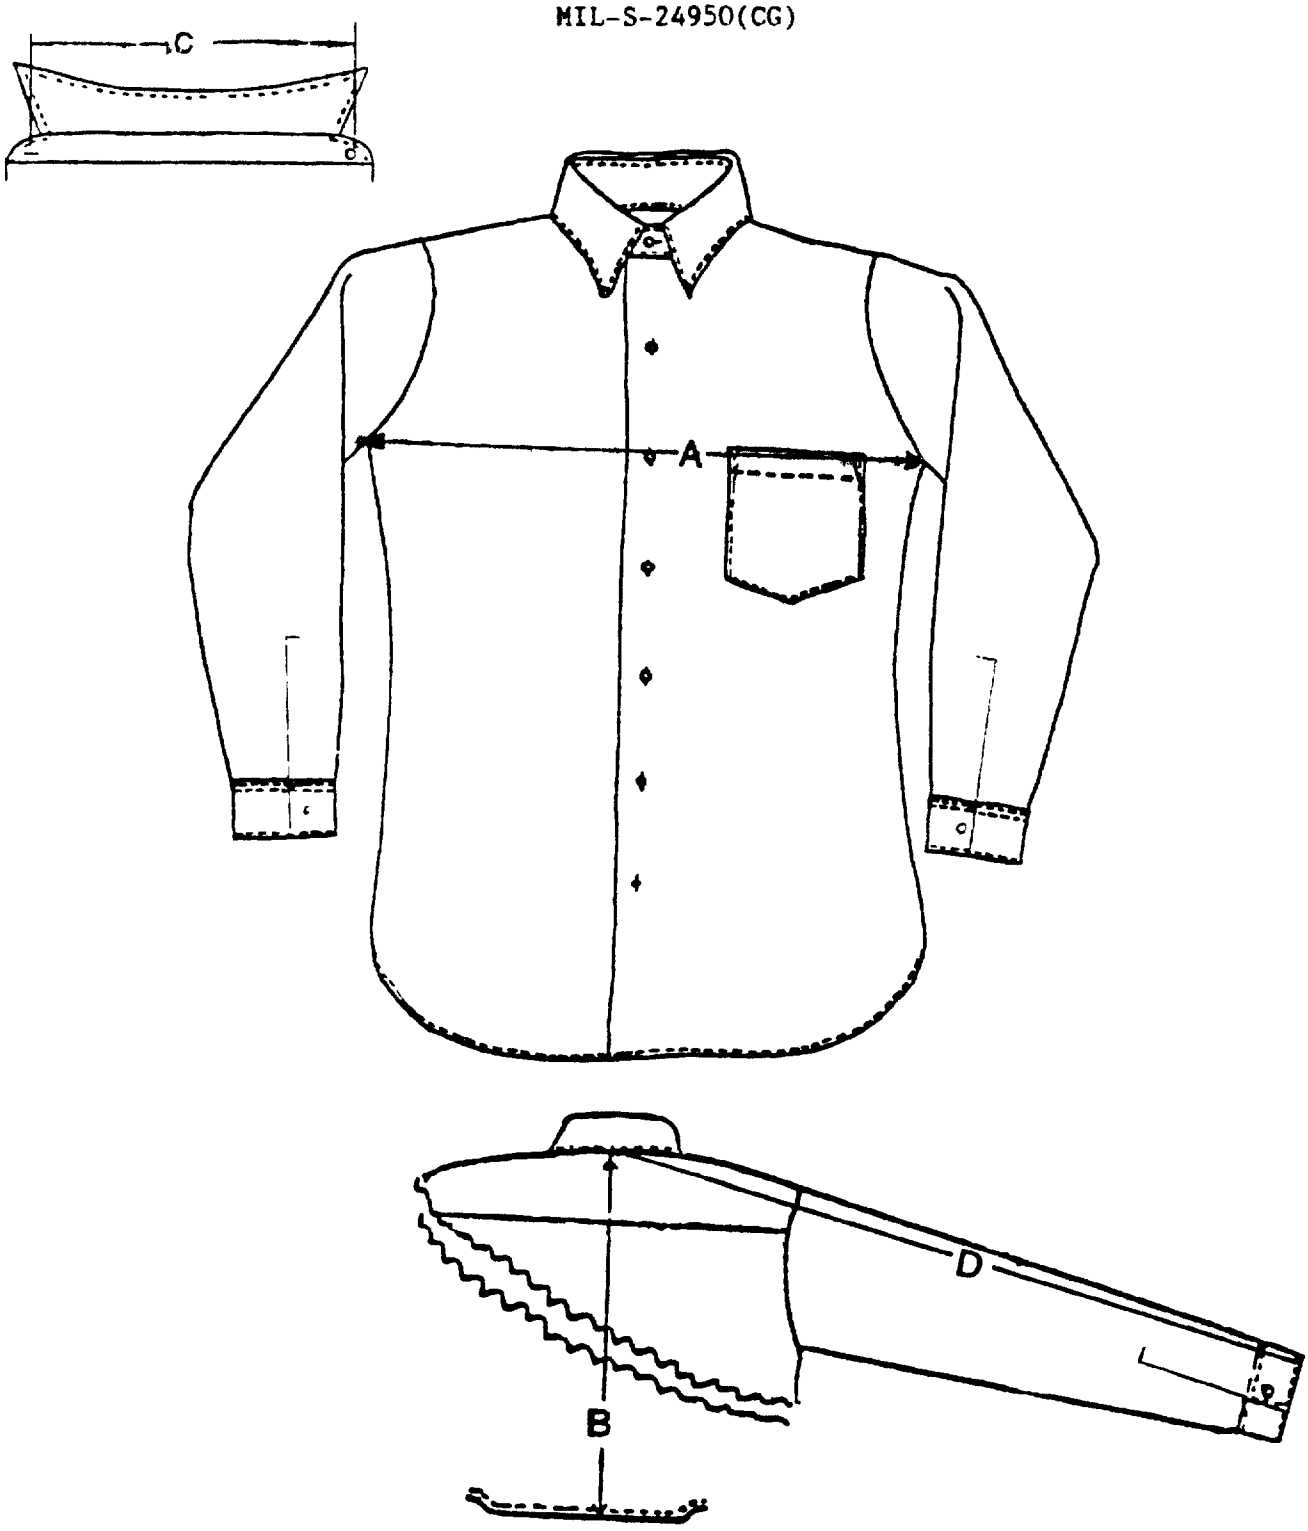


Figure 1 - Shirt, Man's, Dress White, Long Sleeve (CG)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-24950(CG)	SHIRT, MAN'S, DRESS WHITE, LONG SLEEVE (CG)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*. _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
21 Strathmore Road, Code 50
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:14Z
Check the source to verify that this is the current version before use.