NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-83536/22
27 March 1992

PERFORMANCE SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, 3PDT, LOW LEVEL TO 10 AMPERES, PERMANENT MAGNET DRIVE, HERMETICALLY SEALED, ALL WELDED, TRANSIENT SUPPRESSED DC COILS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-PRF-83536.


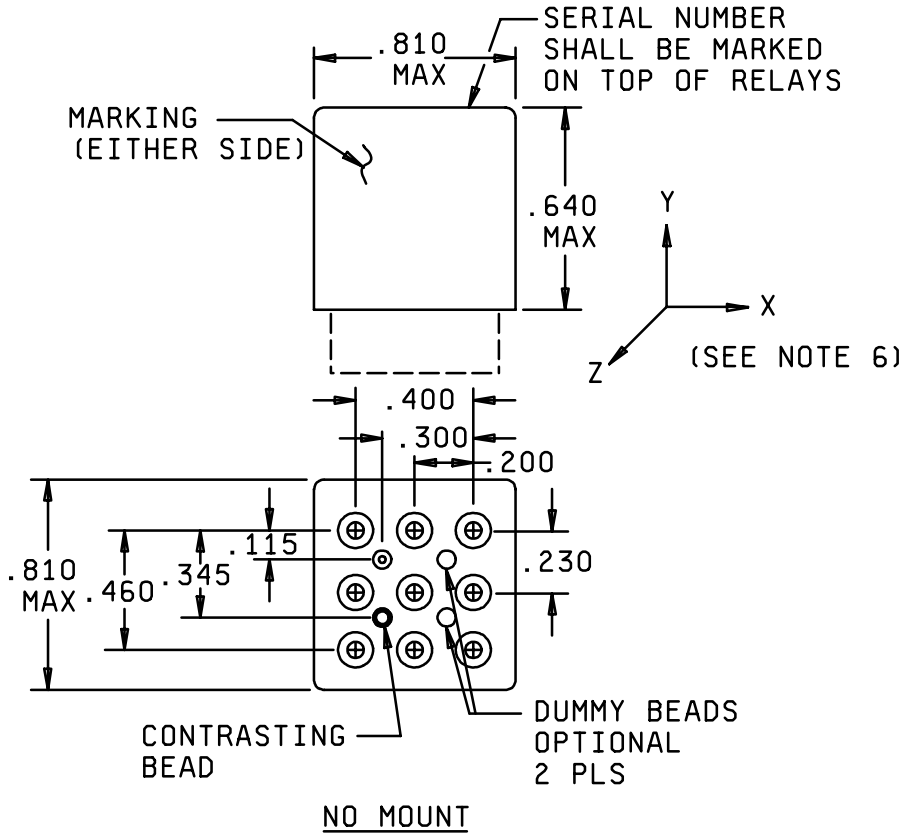


FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:08Z
Check the source to verify that this is the current version before use.

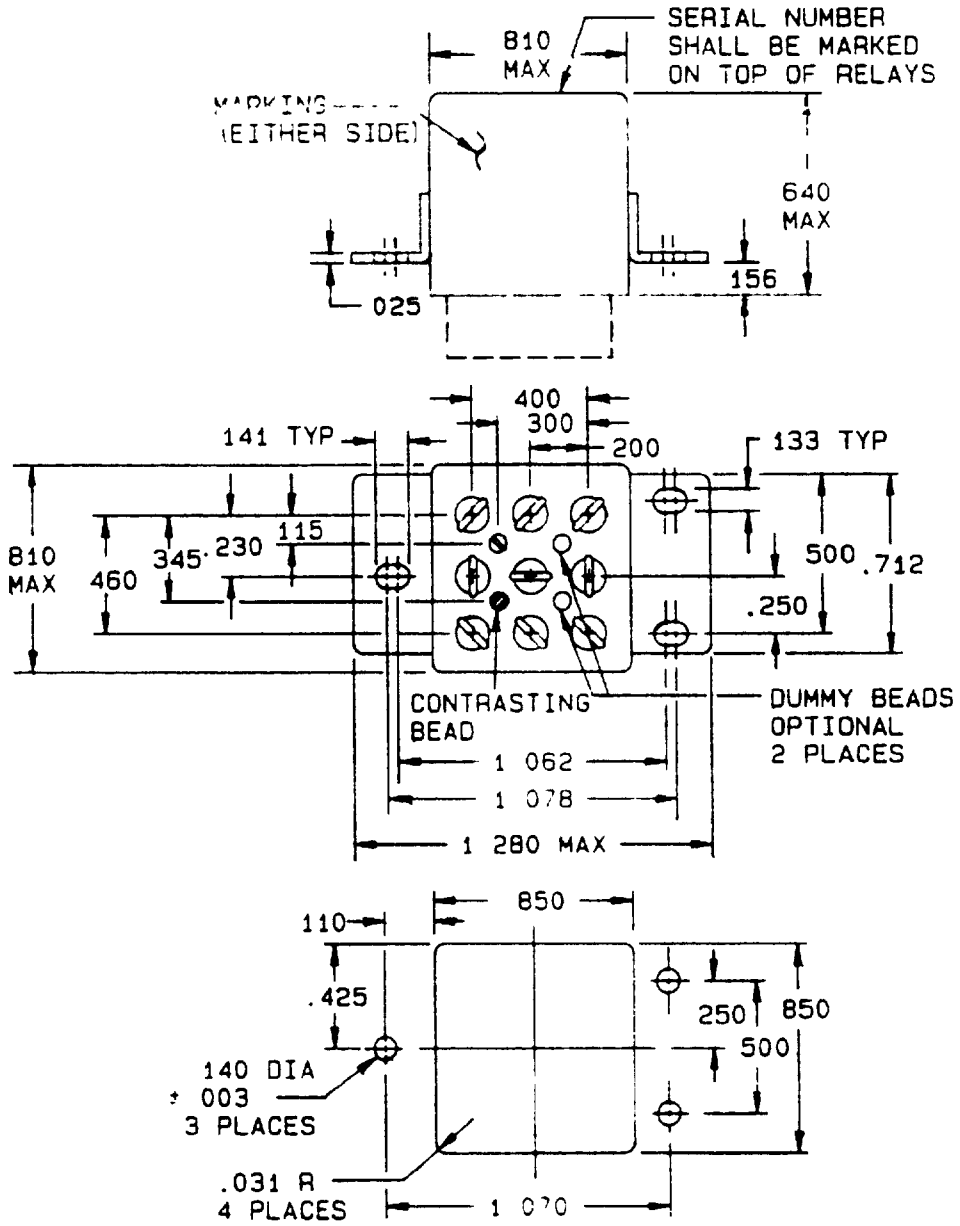

MOUNTING HOLE LAYOUT

RAISED VETRICAL FLANGE MOUNT (RVFM)

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 202610-23T09:08Z
Check the source to verify that this is the current version before use.


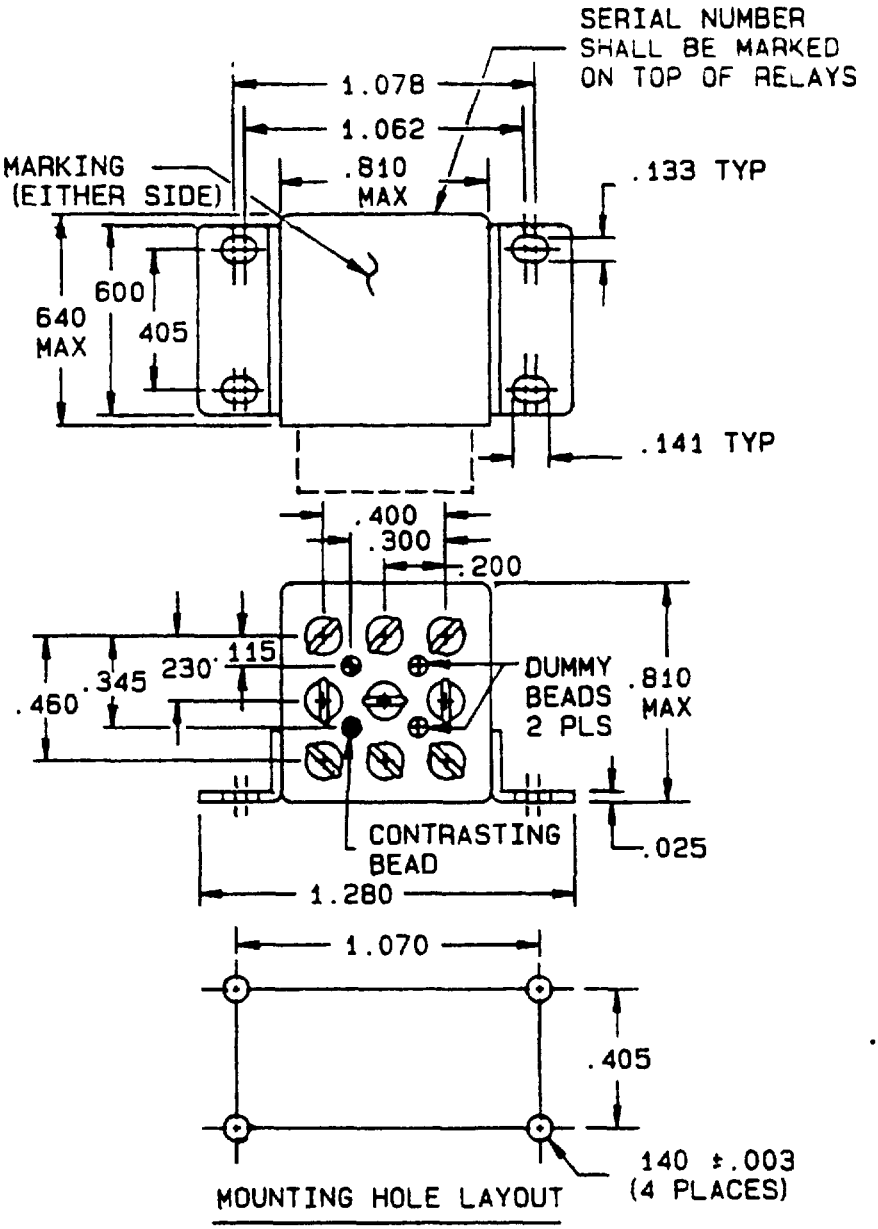


FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:08Z
Check the source to verify that this is the current version before use.

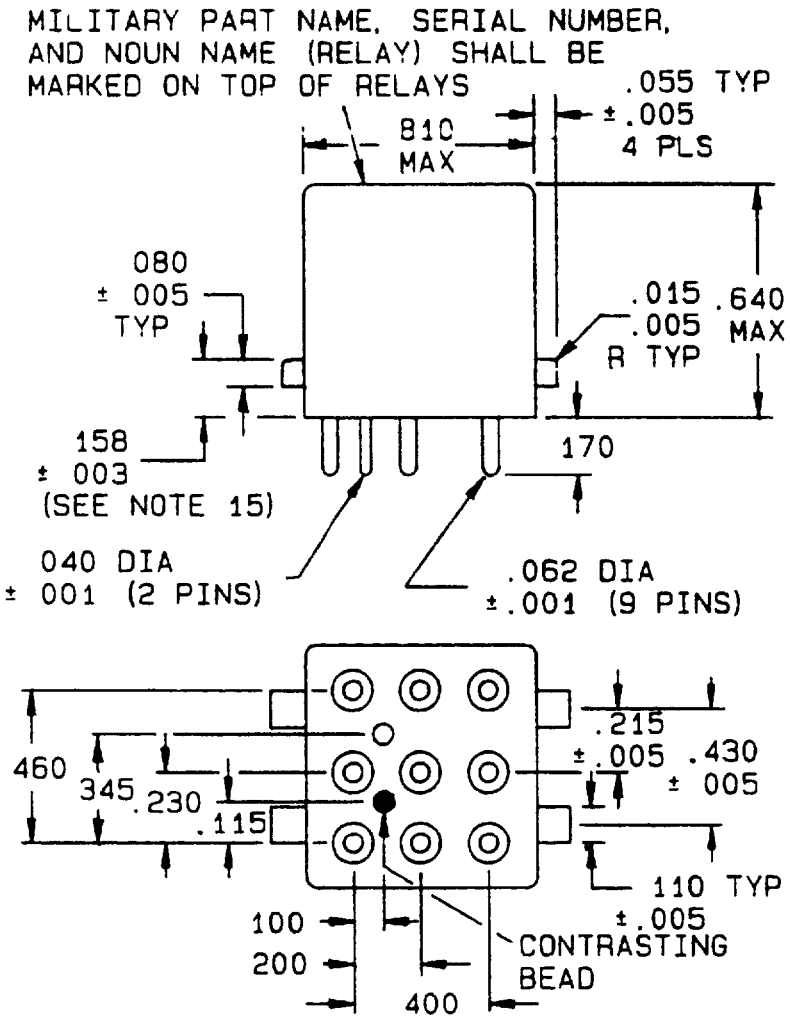

TRACK MOUNT

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 202610-23T09:08Z
Check the source to verify that this is the currentersion before use.

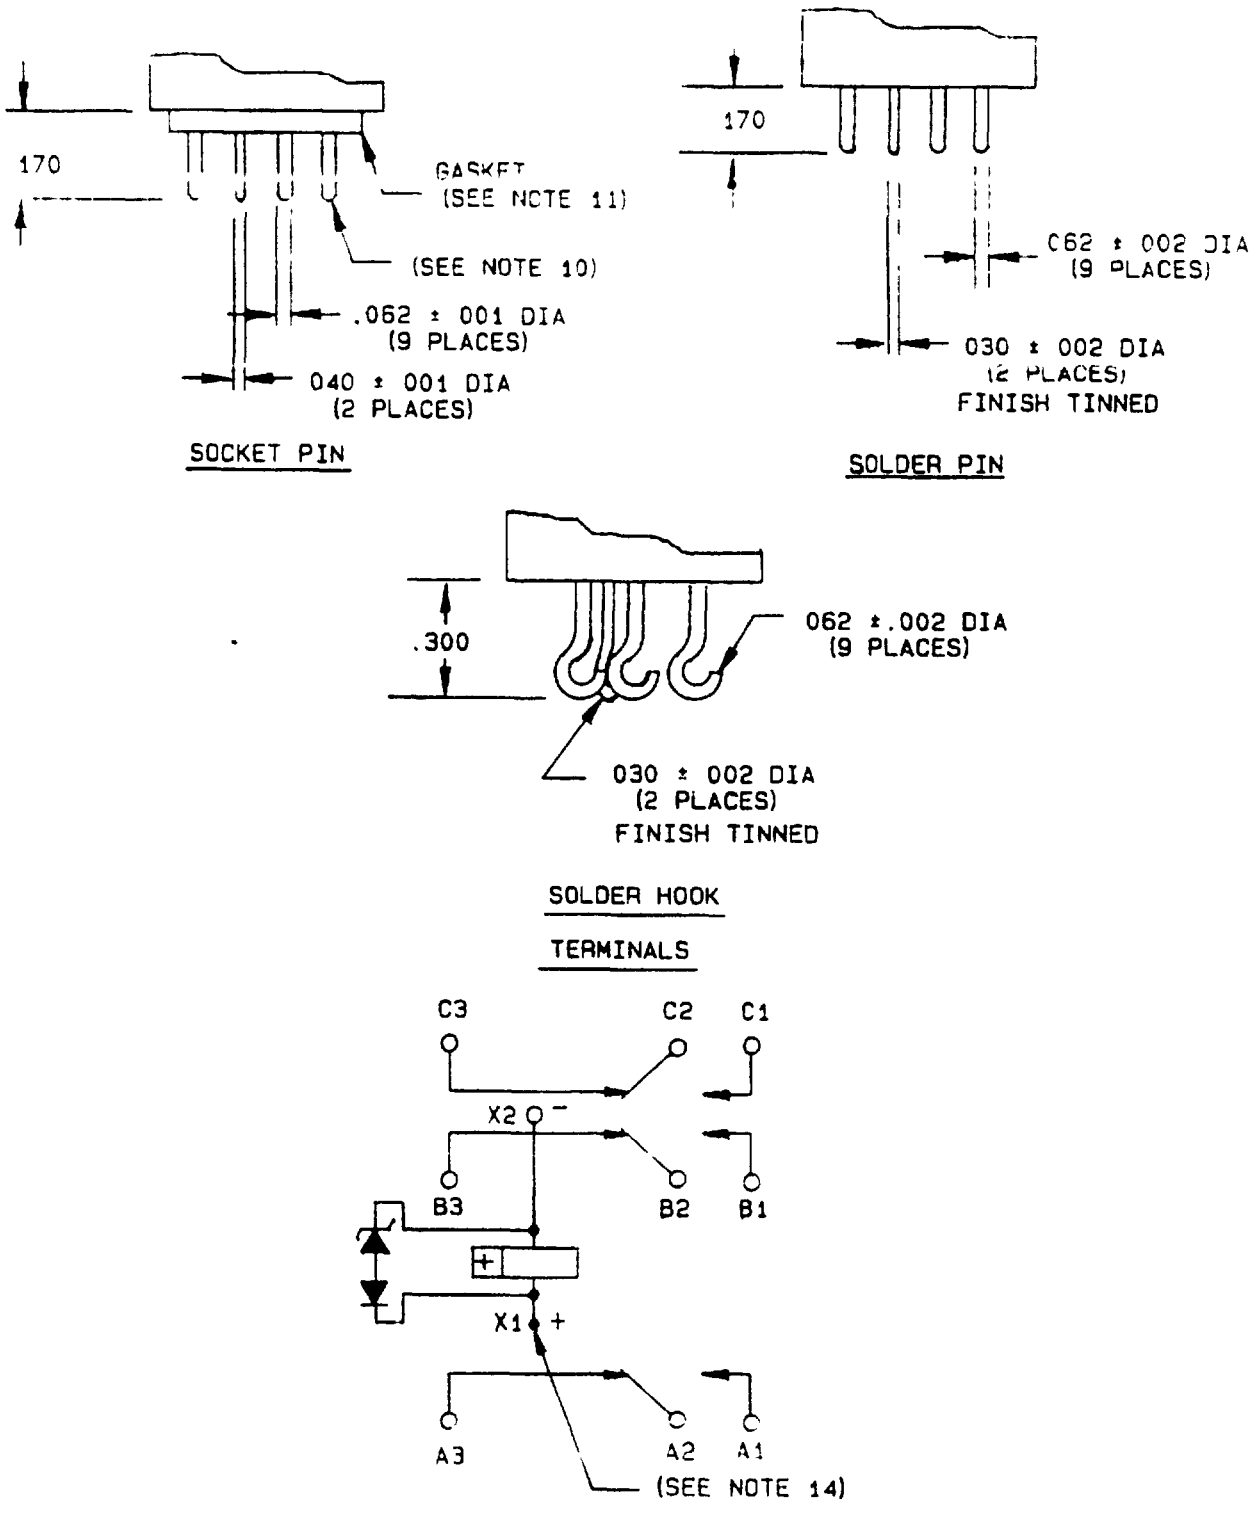


FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T09:08Z
Check the source to verify that this is the currentversion before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
001	0 03	080	2 03	2.5	3 46	500	12 70
002	0 05	110	2 79	230	5 84	600	15 26
003	0 08	115	2 92	250	6 35	640	16 26
005	0 13	133	3 38	300	7 62	712	18 08
015	0 38	140	3 56	345	8 76	810	20 57
025	0.64	141	3.58	400	10.16	850	21.59
030	0 76	156	3 96	405	10 29	1 062	26 97
031	0 79	158	4 01	425	10 80	1 078	27 38
040	1 02	170	4 32	430	10 92	1 280	32.51
055	1 39	200	5 08	460	11 68		

NOTES

1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 010 (0 25 mm)
4. There shall be affixed to the relay a suitable legible circuit diagram that identifies each terminal location specified
5. These relays are polarized monostable
6. This relay shall not operate or be damaged by reverse polarity
7. Permanent magnet drive consists of a permanent magnet with its flux path switched and combined with the electro-magnet flux
8. Applicable to horizontal flange mount only The circuit diagram, manufacturer's PIN, and the military PIN shall be marked on the near side The remaining portion of the nameplate data shall be marked on the far side
9. Applicable to horizontal flange mount only Relays shall be marked with the manufacturer's name or CAGE code and date code Marking shall be with the bottom of the print adjacent to the near side
10. Socket pin terminals shall be gold-plated in accordance with MIL-G-45204, type II, class I The nickel underplating shall be 50 to 150 microinches thick minimum
11. Silicone rubber gasket, AMS 3332, shore hardness 15 to 35, thickness 050 ± 005 (1.27 ±0 13 mm)
12. Back EMF (transient voltage) 42 V dc maximum
13. JANTX or equivalent screened semiconductors or hybrid devices shall be used for internal coil suppression Relays using suppression devices shall continue to operate should the suppression circuits be in a failure mode Diodes shall have a peak inverse voltage of 600 V dc minimum
14. Indicated terminal shall be identified by a contrasting bead
15. Measure from surface of header
16. Plane of critical motion for vibration and shock is Y-axis

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 202640-23T09:08Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS

Contact data

Load ratings See table I

Low level 10 to 50 μA at 10 to 50 mv dc or peak ac

Intermediate current Applicable

Mixed loads Applicable

TABLE I Rated contact load and cycles (amperes per pole).

Type of load (high level)	Cycles x 10^3	28 V dc	115 V ac 1 phase 400 Hz	115/2200 V ac 3 phase 400 Hz
Resistive	50	10	10	10
Inductive	10	6	N/A	N/A
Inductive	20	N/A	8	8
Motor	50	4	4	4
Lamp	50	2	2	N/A

Life 50,000 cycles, unless otherwise specified (see table I)

Contact voltage drop or resistance

Initial contact voltage drop: 0 100 volt maximum Rated resistive current at 6 V dc or peak ac Relays shall not make or break this load

Initial contact resistance 0 010 ohm maximum 50 mA max at 6 V dc or peak ac.

High level life (contact voltage drop)

During life 10 percent open circuit voltage maximum

After life 0 125 volt maximum

Intermediate current (contact resistance)

During intermediate current 3 ohms maximum

After intermediate current: 0 150 ohm maximum

Low level (contact resistance)

During low level 100 ohms maximum

After low level 0.150 ohm maximum at 100 mA and 28 V dc

Contact bounce· 1 0 millisecond maximum

Contact stabilization time· 2 5 milliseconds maximum

Break bounce (normally open contacts) 0 1 millisecond maximum

Overload current. 30 amperes dc, 60 amperes ac

Source: https://assist.dla.mil -- Downloaded: 202610-23T09:08Z
Check the source to verify that this is the current version before use.

Rupture current 40 amperes dc, 80 amperes ac

Time current relay characteristics See table II

TABLE II Time current relay characteristics 1/

Successive application	Amperes	Time
1	20	1 hour
2	30	20 seconds
3	75	2 seconds
4	150	0.53 second

1/ All relays shall withstand overload and fault currents Relays must be able to sustain five applications (make and carry only) of power concurrently on adjacent poles at each of four different current levels in the sequence listed in table II Separate relays shall be tested at 28 V dc and 115/200 V ac, 400 Hz 3-phase Cooling time between successive applications shall be 30 minutes Tests shall be performed on both normally open and normally closed contacts There shall be no failures or evidence of welding or sticking and relays shall pass contact voltage drop at the conclusion

Coil data 1/ See table III

Operate time 6 milliseconds maximum with rated coil voltage at 25°C 7 milliseconds maximum with rated coil voltage over the temperature range

Release time 6 milliseconds maximum from rated coil voltage at 25°C 7 milliseconds maximum from rated coil voltage over the temperature range

Duty rating Continuous

Coil transient suppression Applicable

Neutral screen Not applicable

Electrical data

Insulation resistance

Initial 100 megohms at 500 V dc

After life or environmental tests 50 megohms at 500 V dc

1/ CAUTION: Due to possible interaction of relay magnetic fields, the following spacing requirements, as a minimum, shall be considered in dense packaging situations

a Row to row assisting fields 125 (3 18 mm)

b Row to row opposing fields 1875 (4 763 mm)

c Side to side alternating fields 0625 (1 588 mm)

d Side to side like fields 125 (3 18 mm)

Source: https://assist.dla.mil -- Downloaded: 202610-23T09:08Z
Check the source to verify that this is the current version before use.

TABLE III Dash numbers and characteristics 1/

Dash number 2/			Mount	Coil data										
				At 25°C					Over temperature range			Maximum pickup voltage	
Solder pin	Solder hook	Socket pin		Coil voltage (V dc) 3/		Coil resistance (ohms) minimum	Specified pickup voltage (V dc) 4/	Specified hold voltage (V dc) 4/	Specified dropout voltage (V dc) 4/	Specified pickup voltage (V dc) 4/	Specified hold voltage (V dc) 4/	Specified dropout voltage (V dc) 4/	High temperature test	Continuous current test
				Rated	Max									
001	002	003	No mount	6	7 3	15	3 3	1 6	0.4	4 5	2 3	0 25	5 0	5 7
004	005	006	RVFM	6	7 3	15	3 3	1 6	0 4	4 5	2 3	0 25	5 0	5 7
007	008	---	HFM	6	7 3	15	3 3	1 6	0 4	4.5	2 3	0 25	5 0	5 7
009	010	011	No mount	12	14 5	70	6.6	3 3	0 75	9 0	4 5	0 5	9 9	11 25
012	013	014	RVFM	12	14 5	70	6 6	3 3	0 75	9 0	4.5	0 5	9 9	11 25
015	016	---	HFM	12	14 5	70	6 6	3.3	0 75	9 0	4.5	0 5	9 9	11 25
017	018	019	No mount	28	29 5/	360	13 5	5.5	2.3	18 0	7 0	1 5	19 8	22 5
020	021	022	RVFM	28	29 5/	360	13 5	5.5	2.3	18 0	7.0	1 5	19 8	22 5
023	024	---	HFM	28	29 5/	360	13 5	5.5	2 3	18 0	7 0	1 5	19 8	22 5
---	---	6/ 7/ 025	Track	28	29 5/	360	13.5	5 5	2.3	18 0	7 0	1 5	19 8	22 5
026	027	028	No mount	48	50	1125	24 0	10.0	3 0	36 0	12 0	2 4	40 0	44 0
029	030	031	RVFM	48	50	1125	24 0	10.0	3.0	36 0	12.0	2 4	40 0	44 0
032	033	---	HFM	48	50	1125	24 0	10 0	3 0	36 0	12 0	2.4	40 0	44 0

See footnotes on next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:08Z
Check the source to verify that this is the current version before use.

TABLE III Dash numbers and characteristics - Continued 1/

1/ Each relay possesses high level and low level capabilities However, relays previously tested or used above 10 mA resistive at (V dc maximum or peak ac open circuits are not recommended for subsequent use in low level applications.
2/ The suffix letter L, M, P, or R to designate the applicable failure rate level shall be added to the applicable listed dash number Failure rate level (percent per 10,000 cycles) L, 3 0, M, 1 0, P, 0 1, R, 0 01 Example: 001L, 002R
3/ CAUTION: The use of any coil voltages less than the rated coil voltage will compromise the operation of the relay
4/ Pickup dropout voltage as shown is for test purposes only and are not to be used for design criteria
5/ When maximum ambient temperature does not exceed +85°C, the maximum coil voltage shall be 32 V dc
6/ For qualification only, the relay shall meet the test requirements of this specification when installed in relay socket mount MIL-R-6106/23 and relay bracket mount MIL-R-6106/25
7/ Internal visual Accomplish on a 100 percent basis prior to final encapsulation of the device to detect and eliminate devices with internal defects or foreign particles that could lead to device failure. The inspection equipment shall include optical equipment of at least 10X magnification and visual standards to permit the inspector to make objective decisions as to the acceptability of the device being examined

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:08Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage 2/

	Coil to case	All other points
Sea level		
Initial	1,000	1,250
After life	750	1,000
Altitude		
At 80,000 feet	250	250
At 300,000 feet	500	500

Environmental characteristics

Temperature range -70°C to +125°C

Maximum altitude rating 300,000 feet

Shock (specified pulse) Applicable, MIL-STD-202, method 213, test condition C, 200 g's, for 6 ±1 ms, except horizontal flange mount peak g value shall be 100 g's for 6 ±1 ms Contact chatter shall not exceed 10 microseconds maximum for closed contacts and 1 microsecond maximum closure for open contacts

Vibration (sinusoidal) Applicable, MIL-STD-202, method 204, 30 g's except frequency range shall be 70 to 3,000 Hz Horizontal flange mount shall be 20 g's, 57 to 3,000 Hz Contact chatter shall not exceed 10 microseconds maximum for closed contacts and 1 microsecond maximum closure for open contacts.

Vibration (sinusoidal) Applicable to track mount only Test in accordance with MIL-STD-202, method 204 0.06 inch double amplitude, 10 to 55 Hz 10 g's, 55 to 500 Hz, 20 g's, 500 to 3,000 Hz Contact chatter shall not exceed 10 microseconds maximum for closed contacts and 1 microsecond maximum closure for open contacts

Vibration (random) Applicable to qualification and group C inspection Test in accordance with MIL-STD-202, method 214, test condition IG (0.4 g^2/Hz, 50 to 2000 Hz), 15 minutes each plane, for horizontal flange mount test condition IE (0.2 g^2/Hz) Contact chatter shall not exceed 10 microseconds maximum for closed contacts and 1 microsecond maximum closure for open contacts

Vibration (random) Applicable to track mount only. Applicable to qualification only Test in accordance with MIL-STD-202, method 214, test condition IF (0.3 g^2/Hz, 50 to 2000 Hz), 15 minutes each plane Contact chatter shall not exceed 10 microseconds maximum for closed contacts and 1 microsecond maximum closure for open contacts

Acceleration Applicable, except 15 g's.

Physical data

Dimensions and configurations See figure 1.

Weight 0.062 pound (28.15 g's)

2/ Dielectric may be improved by suitable insulation of terminals and wiring after installation

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:08Z
Check the source to verify that this is the current version before use.

Terminal strength

Solder hook terminals

Pull force 5 pounds ±0 5 pound

Bend Not applicable

Twist Not applicable

Solder pin terminals

Pull force

For 030 diameter terminals 3 pounds ±0 3 pound

For 062 diameter terminals 10 pounds ±1 0 pound

Bend Not applicable

Twist Not applicable

Socket pin terminals

Pull force

For 040 diameter terminals 5 pounds ±0 5 pound

For 062 diameter terminals 10 pounds ±0 5 pound

Bend Not applicable

Twist Not applicable

Terminal solderability Applicable to solder pin and solder hook terminals only.

Seal Hermetic

Marking Applicable

Part or Identifying Number (PIN) M83536/22 (dash number from table III and suffix letter designating failure rate level) PIN is a new term encompassing previous terms used in specifications such as part number, type designator, and identification number

Qualification inspection

Qualification inspection and sample size See table IV

Source: https://assist.dla.mil -- Downloaded: 202640-23T09:08Z
Check the source to verify that this is the current version before use.

TABLE IV Qualification inspection and sample size 1/

Single submission	Group submission	
18 units plus 1 open unit for level L at C = 0 2/	M83536/22-022	18 units plus 1 open unit for level L at C = 0 2/
33 units plus 1 open unit for level M at C = 0 2/	"	33 units plus 1 open unit for level M at C = 0 2/
Qualification inspection as applicable	"	Qualification inspection as applicable
	M83536/22-018 M83536/22-023 M83536/22-025	2 units, qualification inspection table, group II, shock, vibration, acceleration, terminal strength, and seal
	M83536/22-002 M83536/22-014 M83536/22-032	2 units, qualification inspection table, group II

1/ For retention of qualification or extension of qualification to lower failure rate levels, all life test data accumulated on MIL-R-83536/21 may be used in addition to MIL-R-83536/22 data Prior to performance of retention of qualification testing, the relay manufacturer shall preselect the sampling plan

2/ The number of units required for qualification testing shall be increased as required in group V, table II of MIL-R-83536, if the contractor elects to test the number of units permitting one or more failures. Prior to performance of qualification testing, the relay manufacturer shall preselect the sampling plan.

Supersession data. See table V

TABLE V Supersession data

Superseded PIN M6106/	Replacement PIN M83536/22-
24-003	023
29-003	016
29-004	016
29-011	017
29-012	017
29-015	018
29-016	018
29-019	019
29-020	019
29-023	020
29-024	020
29-027	021
29-028	021
29-030	022
29-031	022

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:08Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Air Force - 99
DLA - ES

Preparing activity
Air Force - 85

Agent:
DLA - ES

(Project 5945-0824-20)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:08Z
Check the source to verify that this is the current version before use.