
MILITARY SPECIFICATION SHEET

SWITCHES, PRESSURE, DIFFERENTIAL (TYPE III), 4 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the pressure switches described herein shall consist of this specification and the latest issue of MIL-S-9395.

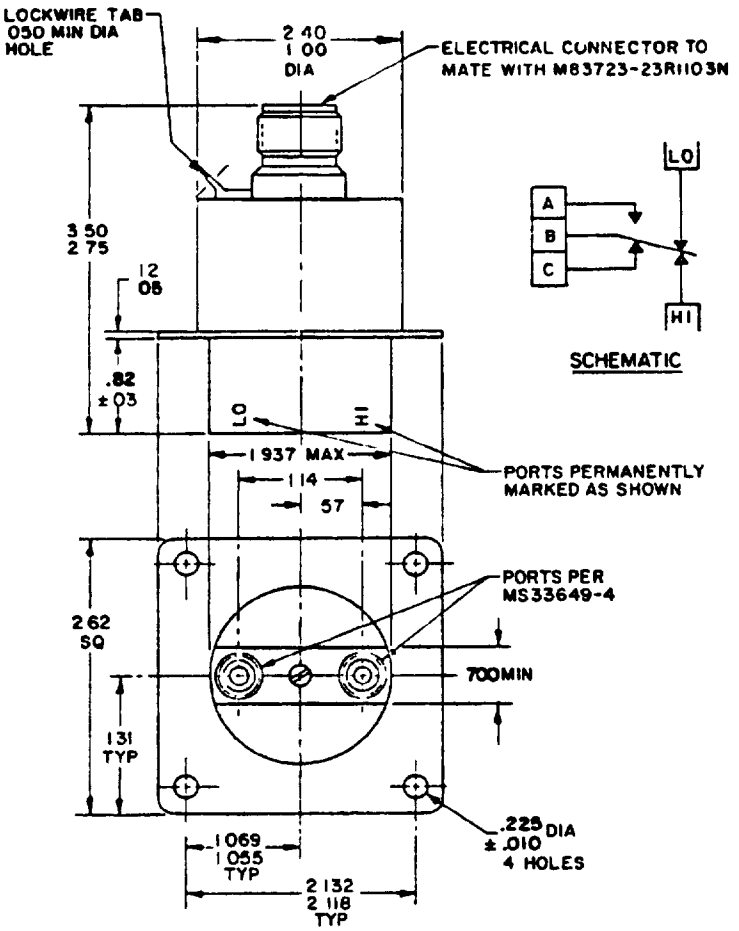

WEIGHT NOT TO EXCEED 8 lbs


Configuration 1

FIGURE 1 Switches, pressure, differential, type III.

(B) denotes changes

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:16Z
Check the source to verify that this is the current version before use.

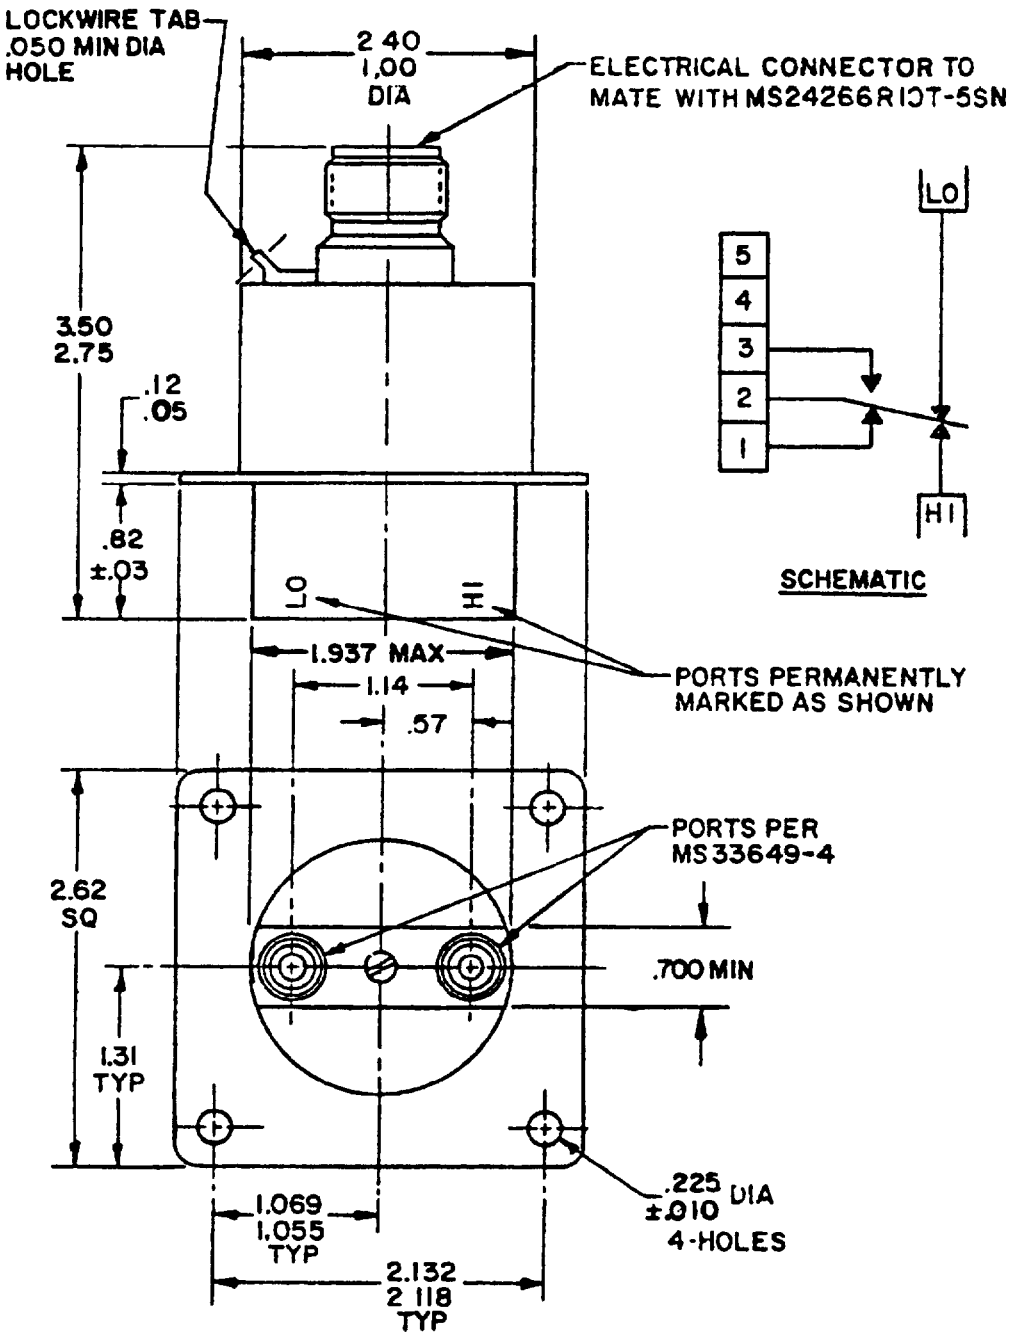


WEIGHT NOT TO EXCEED 8lbs

Configuration 2

FIGURE 1. Switches, pressure, differential, type III - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:16Z
Check the source to verify that this is the current version before use.

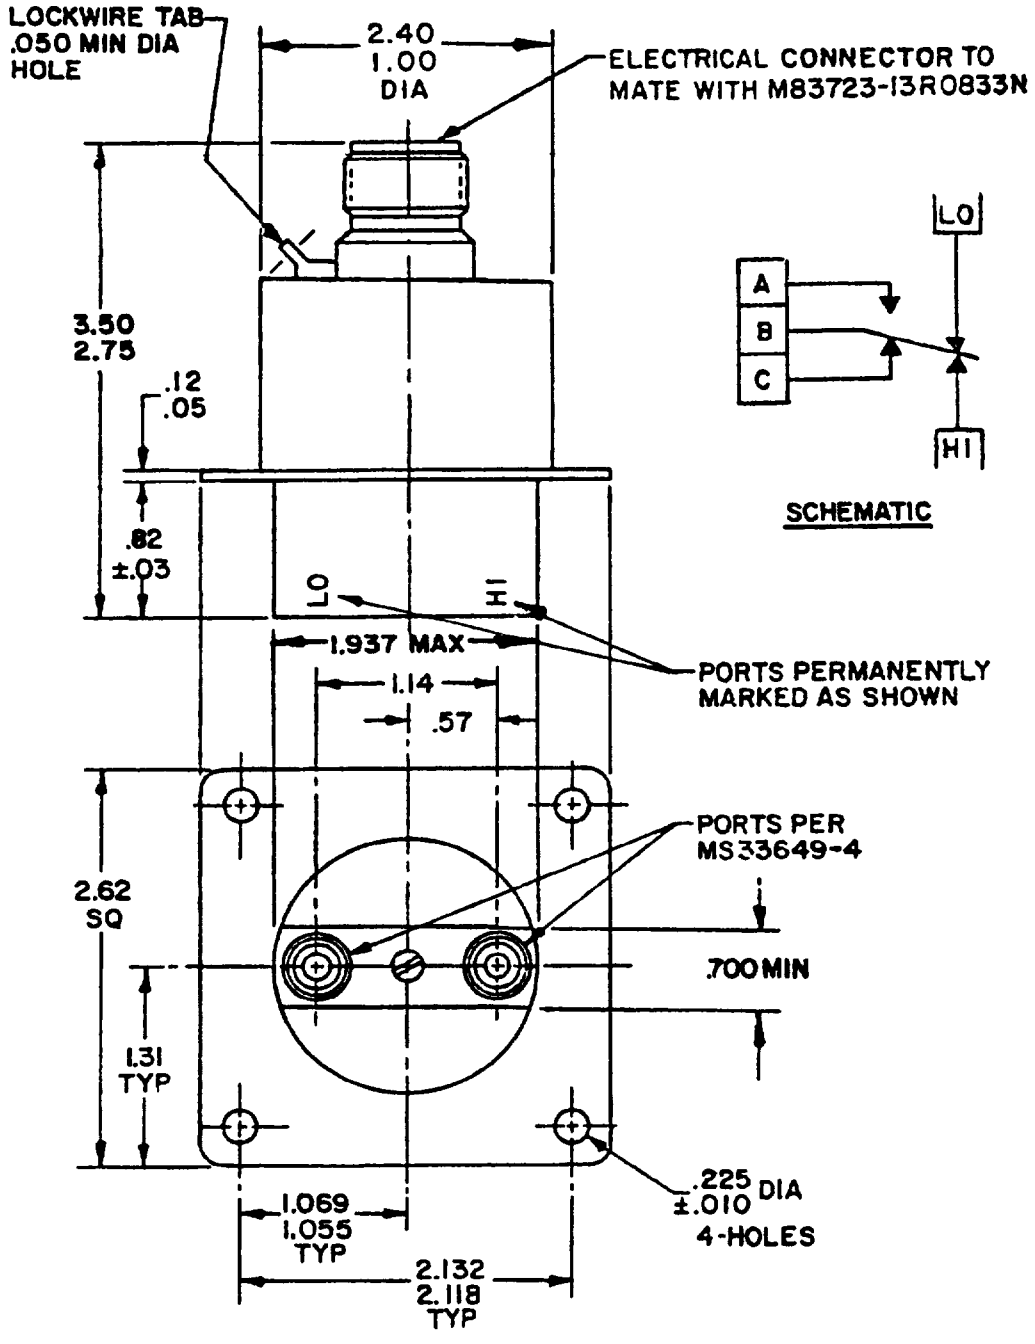


WEIGHT NOT TO EXCEED .8 lbs.

Configuration 3

FIGURE 1. Switches, pressure, differential, type III - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:16Z
Check the source to verify that this is the current version before use.

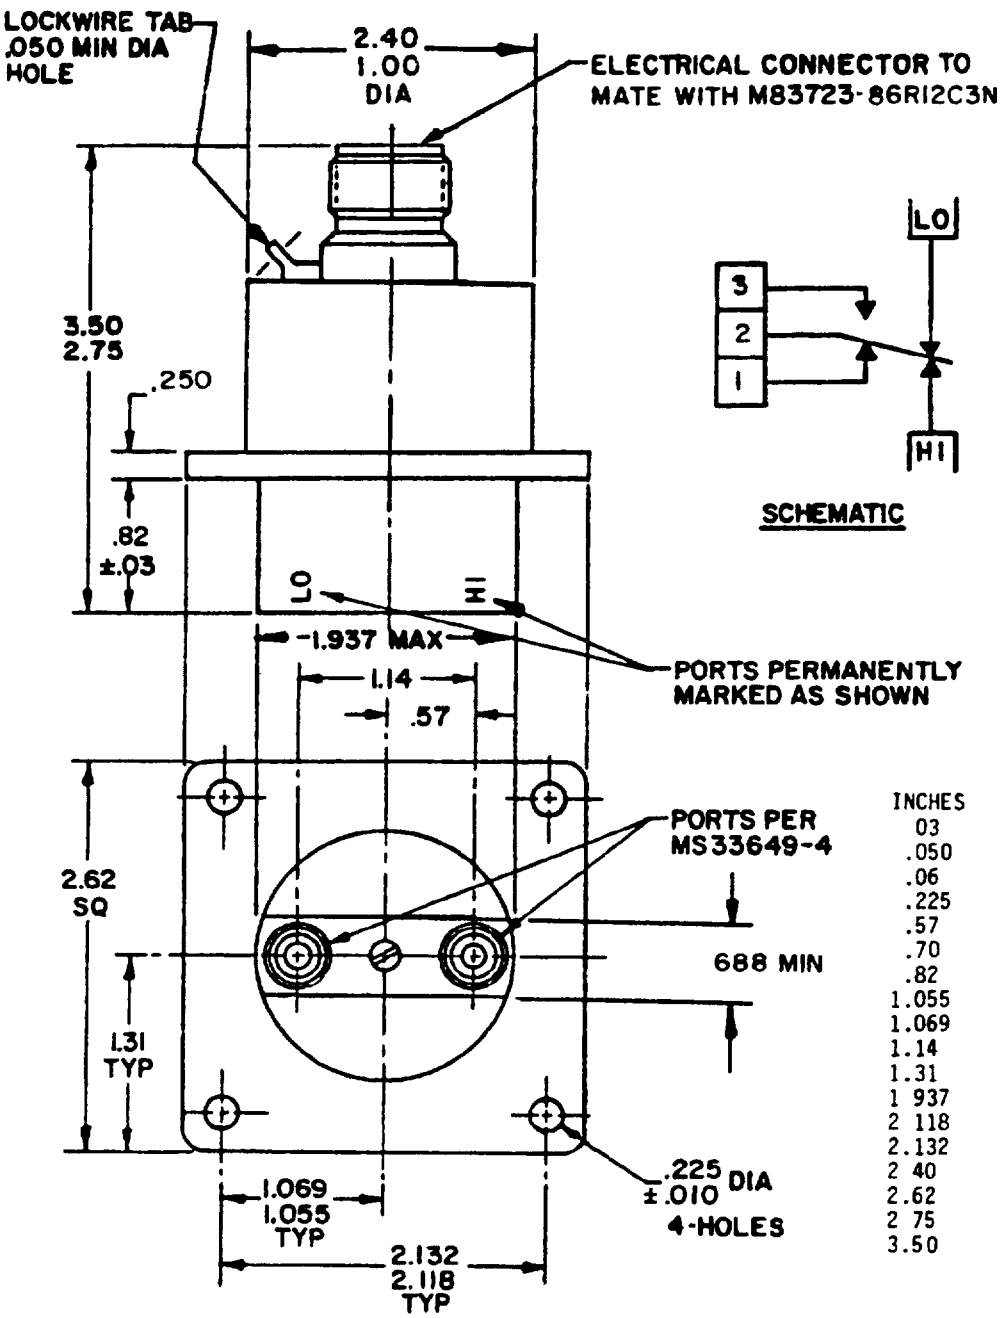

INCHES	MM
03	76
.050	1.27
.06	1.52
.225	5.71
.57	14 48
.70	17.78
.82	20.83
1.055	26.80
1.069	27.15
1.14	28 96
1.31	33.27
1 937	49.20
2 118	53.80
2.132	54.15
2 40	60 96
2.62	66.55
2 75	69 85
3.50	88.90

Ⓑ Configuration 4

WEIGHT: NOT TO EXCEED .97 lbs

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1 inch = 25 4 mm
3. Unless otherwise specified, tolerance is ±.02 (.51 mm).

FIGURE 1. Switches, pressure, differential, type III - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, weight, and electrical schematic: See figure 1.

Calibration: See tables I, II, III, and IV.

Proof pressure: 250 lb_f/in^2g high over low and simultaneously.

System pressure. 125 lb_f/in^2g high over low and simultaneously.

Burst pressure: 500 lb_f/in^2g high over low and simultaneously.

Electrical ratings: Operating voltage - 28 Vdc. Current rating - 4 amperes resistive, 2 amperes inductive.

Seal:

High pressure chamber: Media proof. During this test the low pressure chamber shall be open to atmosphere. Subject switches to proof pressure for 2 minutes using hydraulic fluid per MIL-H-5606 with chamber pressure continuously being monitored. Isolate the chamber at proof pressure with the chamber disconnected from the pressure source. Under that condition, the pressure shall not drop more than 1 lb_f/in^2g for the first 30 seconds to allow stabilization of test equipment; no pressure loss is allowed thereafter.

Low pressure chamber: Media proof. Test as above except low pressure port is connected to high pressure port.

Electrical chamber. See table I.

Electrical connector: See figure 1.

Pressure port. See figure 1.

Media: Dry air; nitrogen, fuel per MIL-T-5624, oil per MIL-L-7808; or hydraulic fluid per MIL-H-5606.

High temperature (operating and nonoperating): C (350°F).

Low temperature (operating and nonoperating): D (-65°F).

Altitude: C (70,000 feet).

Shock: C (100 G).

Vibration: S (test condition D, method 204 of MIL-STD-202).

Life mechanical: A (100,000 cycles).

Life electrical: C (50,000 cycles).

Acceleration: C (8 G).

Pulsation amplitude: A (0 percent).

Pulsation frequency: A (0 Hz).

Pressure rise: B (more than 1,000 $lb_f/in^2/s$).

Dielectric withstanding voltage (at reduced barometric pressure): Applicable.

Connector torque: Applicable.

Flame test: Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:16Z
Check the source to verify that this is the current version before use.

Explosion. Applicable.

Qualification

Single submission Restricted to switch submitted.

Group submission. See table V

Part number: Part numbers shall be assigned as follows:

Example M9395/32- A A D A B

"M" prefix and specification sheet number

Configuration and pressure setting mode = Code "A" of table I.

High-pressure setting = Code "A" of table II (coarse value of 0 lb_f/in^2d) and code "D" of table III (fine value of 1 1/2 ± 1/2 lb_f/in^2d).

Low-presssure setting = Code "A" of table II (coarse value of 0 lb_f/in^2d) and code "B" of table III (fine value of 1/2 ± 1/2 lb_f/in^2d).

Note. Design limitations (actuation values and tolerances, deadband and deactuation values and tolerances) should be coordinated with manufacturer(s) listed on the QPL for this specification sheet before specifying a particular "M" number. The fact that operating characteristics can be coded does not necessarily mean that it can be manufactured or acquired.

TABLE I Codes for combinations of configurations and pressure setting modes

	Configuration 1		Configuration 2		Pressure	
	Electrical chamber		Electrical chamber		High setting	High setting
	Hermetic	Unsealed	Hermetic	Unsealed		
Code - -	A	D	G	K	At (or max) 1/	At (or min) 1/
Code - -	B	E	H	L	At (or max) 1/	Deadband 2/
Code - -	C	F	J	M	Deadband 2/	At (or min) 1/
	Configuration 3		Configuration 4		Pressure	
	Electrical chamber		Electrical chamber		High setting	High setting
	Hermetic	Unsealed	Hermetic	Unsealed		
Code - -	N	R	U	X	At (or max) 1/	At (or min) 1/
Code - -	P	S	V	Y	At (or max) 1/	Deadband 2/
Code - -	Q	T	W	Z	Deadband 2/	At (or min) 1/

1/ Setting values are designated by codes from tables II and III.

2/ Setting values are designated by codes from tables II and IV

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:16Z
Check the source to verify that this is the current version before use.

TABLE II. Codes for coarse settings.

Code	Coarse value (lb_f/in^2d)	Code	Coarse value (lb_f/in^2d)	Code	Coarse value (lb_f/in^2d)
A - - -	0	L - - -	30	W - - -	80
B - - -	2-1/2	M - - -	35	X - - -	85
C - - -	5	N - - -	40	Y - - -	90
D - - -	7-1/2	P - - -	45	Z - - -	95
E - - -	10	Q - - -	50	1 - - -	100
F - - -	12-1/2	R - - -	55	2 - - -	105
G - - -	15	S - - -	60	3 - - -	110
H - - -	17-1/2	T - - -	65	4 - - -	115
J - - -	20	U - - -	70	5 - - -	120
K - - -	25	V - - -	75	6 - - -	125

TABLE III. Codes for combinations of fine settings and tolerance values.

	Fine value (lb_f/in^2d) for settings below 20 lb_f/in^2d					Tolerance
	0	1/2	1	1 1/2	2	
Code - - -	A	B	C	D	E	±1/2 lb_f/in^2d
Code - - -	F	G	H	J	K	±1 lb_f/in^2d
Code - - -	L	M	N	P	Q	±2 lb_f/in^2d
Code - - -	R	S	T	U	V	±3 lb_f/in^2d
Code - - -	W	X	Y	Z	1	±5 lb_f/in^2d
Code - - -	2	3	4	5	6	±8 lb_f/in^2d
Code - - -	7	8	9	0	+	Min or Max
	Fine value (lb_f/in^2d) for settings of 20 lb_f/in^2d and above					Tolerance
	0	1	2	3	4	
Code - - -	A	B	C	D	E	±1 lb_f/in^2d 1/
Code - - -	F	G	H	J	K	±2 lb_f/in^2d 2/
Code - - -	L	M	N	P	Q	±3 lb_f/in^2d 3/
Code - - -	R	S	T	U	V	±5 lb_f/in^2d
Code - - -	W	X	Y	Z	1	±8 lb_f/in^2d
Code - - -	2	3	4	5	6	±15 lb_f/in^2d
Code - - -	7	8	9	0	+	Min or Max

1/ Not applicable for pressure settings above 33 lb_f/in^2d.
2/ Not applicable for pressure settings above 66 lb_f/in^2d.
3/ Not applicable for pressure settings above 100 lb_f/in^2d.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:16Z
Check the source to verify that this is the current version before use.

TABLE IV. Codes for deadband settings.

Code	Deadband value (lb_f/in^2d)	Code	Deadband value (lb_f/in^2d)
A - - -	0	T - - -	11
B - - -	1/2	U - - -	12
C - - -	1	V - - -	13
D - - -	1-1/2	W - - -	14
E - - -	2	X - - -	15
F - - -	2-1/2	Y - - -	16
G - - -	3	Z - - -	18
H - - -	3-1/2	1 - - -	20
J - - -	4	2 - - -	22
K - - -	4-1/2	3 - - -	24
L - - -	5	4 - - -	26
M - - -	5-1/2	5 - - -	28
N - - -	6	6 - - -	30
P - - -	7	7 - - -	35
Q - - -	8	8 - - -	40
R - - -	9	9 - - -	45
S - - -	10	0 - - -	50

TABLE V. Extent of qualification.

Part number M9395/32-	No. of samples required	Tests	Qualifies
ABAAC	2 each resistive	Complete per qualification inspection of MIL-S-9395	All
GBAAC	2 each resistive		
A6R3M	2 each inductive		
N6R3M	2 each inductive		

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AV
Air Force - 11, 17, 85
DLA - ES

User activities:
Army - AT
Navy - MC, AS, SH
Air Force - 19

Preparing activity:
Air Force - 85

(Project 5930-1148-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:16Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-9395/32B, Switches, Pressure, Differential (Type III), 4 Amperes

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:16Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE AIR FORCE

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 73236 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

AFALD/PTS Standardization
Gentile AFS OH 45444

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:16Z
Check the source to verify that this is the current version before use.