
MILITARY SPECIFICATION SHEET

SWITCHES, PRESSURE, (DIFFERENTIAL), TYPE III, 5 AMPERES

This specification sheet is approved for use by the Air Force Acquisition Logistics Division, Directorate of Electronic Support (AFALD/PTS), Wright-Patterson AFB, Ohio 45433, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pressure switches described herein shall consist of this document and the latest issue of Specification MIL-S-9395.

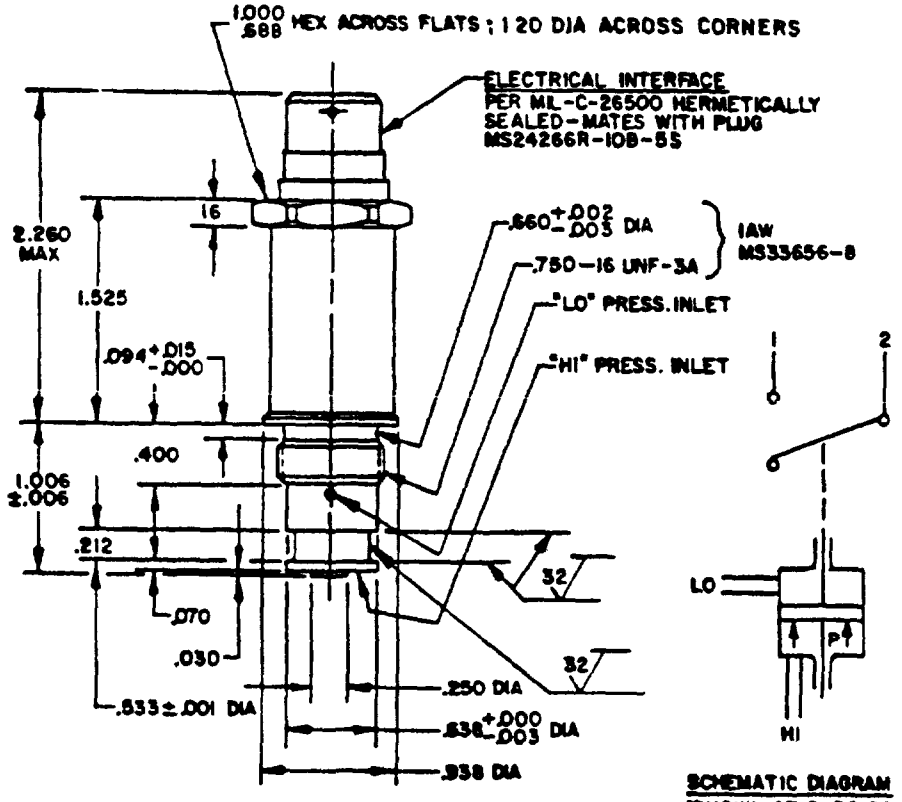

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.094	2.39	.660	16 76
.002	.05	.160	4 06	.750	19.05
.003	.08	.212	5.38	.938	23.83
.006	.15	.250	6.35	1.000	25.40
.015	.38	.400	10.16	1.006	25.55
.030	.76	.533	13.54	1.120	28.45
.070	1 78	.638	16.21	1.525	38 74
				2.260	57.40

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
3. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and 03 (76 mm) for two place decimals

FIGURE 1. Switch

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions, configuration, and electrical schematic· See figure

Weight 0.14 pound, maximum.

Calibration See tables I, II III, IV, and V.

Proof pressure 3,000 lb_f/in^2 high over low and simultaneously.

System pressure 1,500 lb_f/in^2 high over low and simultaneously.

Burst pressure: 7,500 lb_f/in^2 high over low and simultaneously.

Electrical ratings
Operating voltage - 28 Vdc.
Current rating - 5 amperes resistive.
3 amperes inductive.

Seal
High pressure chamber Media proof. Subject switches to proof pressure for 2 minutes using hydraulic fluid per MIL-H-5606 with chamber pressure continuously being monitored. Isolate the chamber at proof pressure with the chamber disconnected from the pressure source. Under that condition, the pressure shall not drop more than 1 lb_f/in^2 for the first 30 seconds to allow stabilization of test equipment, no pressure loss is allowed thereafter.
Low pressure chamber Media proof. Test as above except low pressure port is connected to high pressure port.
Electrical chamber Unsealed.
Electrical connector See figure

Pressure ports See figure.

Media Hydraulic fluid per MIL-H-5606 or MIL-H-83282.

High temperature (operating and nonoperating)· B (275°F).

Low temperature (operating and nonoperating. D (-65°F).

Altitude C (70,000 feet).

Shock C (100 G).

Vibration S (test condition D, method 204 of MIL-STD-202).

Life mechanical A (100,000 cycles).

Life electrical C (50,000 cycles).

Acceleration C (8 G).


Pulsation amplitude· A (0%).

Pulsation frequency. A (0 Hz).

Pressure surge· B (more than 1,000 $lb_f/in^2/sec$).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:17Z
Check the source to verify that this is the current version before use.

Part number: The part number consists of the prefix M9395/33- followed by five code characters, the first from table I (denoting setting mode), the second from table II, the third from table III (denoting high pressure setting), the fourth from table II, and the fifth from table III (denoting the low pressure setting). The following example illustrates the method used in generating a coded part number

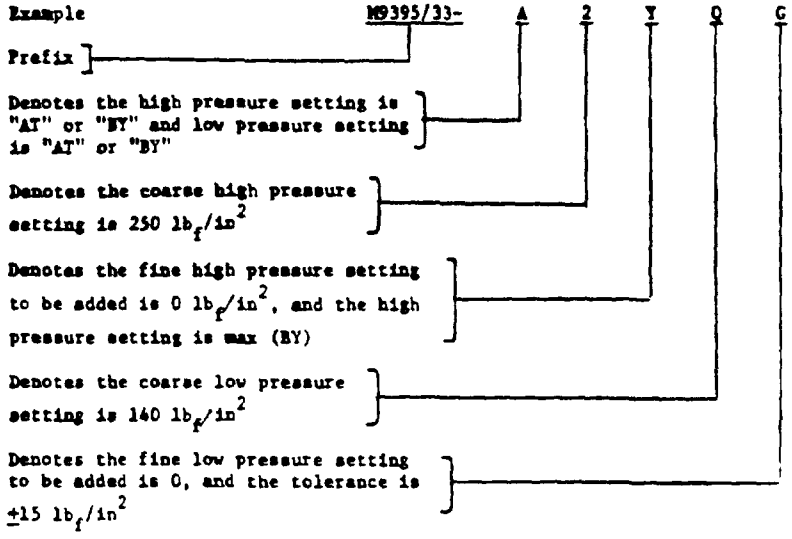

M9395/33-A2YQG is the part number for a switch that is actuated on increasing pressure by 250 lb_f/in^2 and that is deactuated on decreasing pressure at 140 $\pm$15 lb_f/in^2.

Supersession data M9395/33-01 is superseded by M9395/33-A2YQG

TABLE I Code for pressure setting modes

Code character	Setting modes	
	High pressure	Low pressure
A	AT (or BY)	AT (or BY)
B	AT (or BY)	Differential
C	Differential	AT (or BY)

TABLE II Code for coarse pressure setting (within lb_f/in^2)

Code	Coarse pressure setting (lb_f/in^2)	Code	Coarse pressure setting (lb_f/in^2)	Code	Coarse pressure setting (lb_f/in^2)
A	0	N	120	1	240
B	10	P	130	2	250
C	20	Q	140	3	260
D	30	R	150	4	270
E	40	S	160	5	280
F	50	T	170	6	290
G	60	U	180	7	300
H	70	V	190	8	310
J	80	W	200	9	320
K	90	X	210	0	340
L	100	Y	220		
M	110	Z	230		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:17Z
Check the source to verify that this is the current version before use.

TABLE III Code for combination of fine pressure setting and tolerance (This quantity should be added to coarse setting selected from table II)

Fine pressure setting (lb_f/in^2)	Code characters (tolerance lb_f/in^2)											
	Min	±5	±10	±15	±20	±25	±30	±35	±40	±50	±60	Max
0 5	A B	C D	E F	G H	J K	L M	N P	Q R	S T	U V	W X	Y Z

Custodian
Air Force - 85

Review activities
Air Force - 99
DLA - ES

Preparing activity.
Air Force - 85

(Project 5930-F475-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:17Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-318

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AFALD/PTES-Standardization
WPAFB, Ohio 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:17Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-9395/33A(USAF), 18 September 1979

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A. GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO
	DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:17Z
Check the source to verify that this is the current version before use.