
MILITARY SPECIFICATION SHEET

SWITCHES, PRESSURE, (GAGE) TYPE II,
LOW LEVEL TO 5 AMPERE

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-9395.

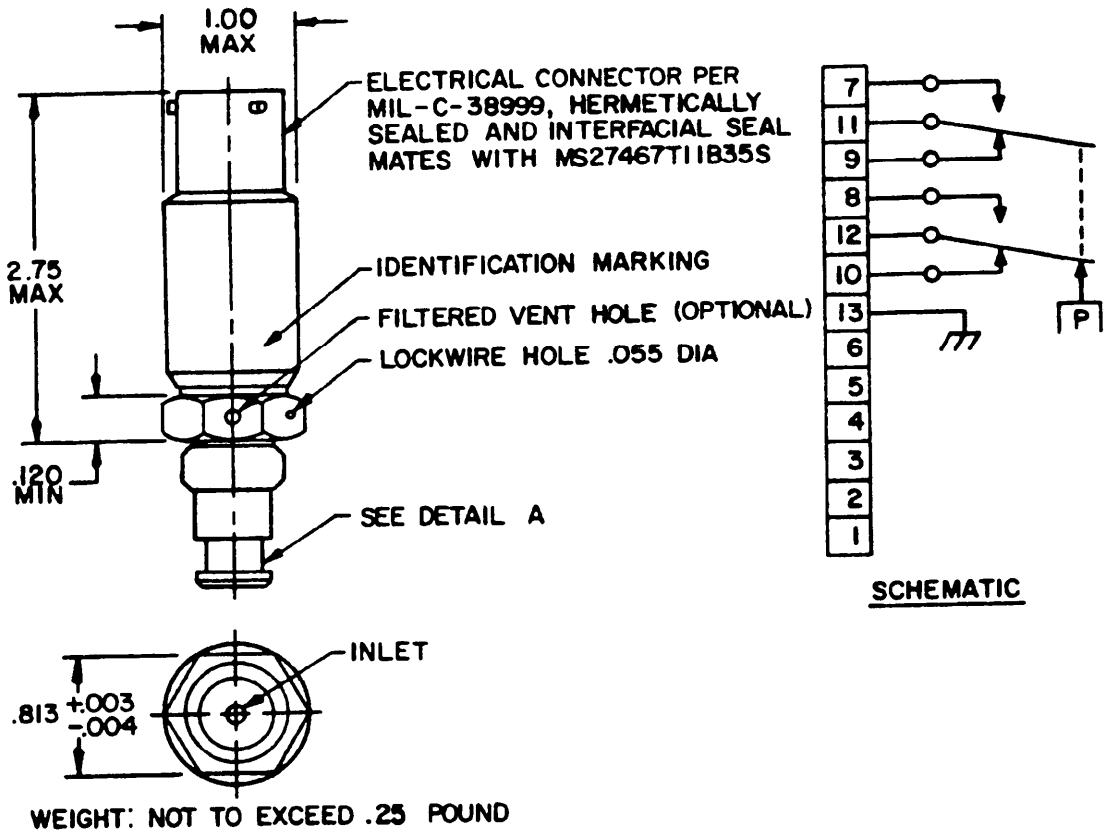

CONFIGURATION 1

FIGURE 1. Switches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:18Z
Check the source to verify that this is the current version before use.

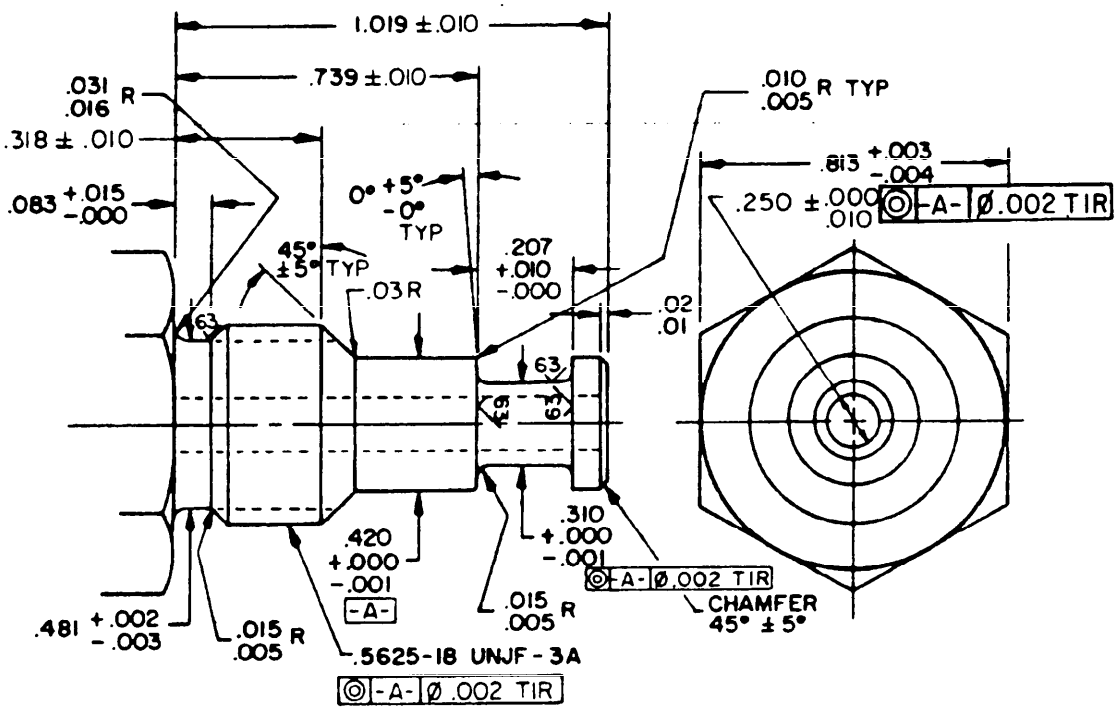

DETAIL A

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.02	.5	.318	8.08
.002	.05	.03	.8	.420	10.67
.003	.08	.031	.79	.481	12.22
.004	.10	.055	1.40	.739	18.77
.005	.13	.083	2.11	.813	20.65
.010	.25	.120	3.05	1.00	25.40
.015	.38	.207	5.26	1.019	25.88
.016	.41	.250	6.35	2.75	69.8
		.310	7.87		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Exact shape of switch is optional provided outline dimensions specified are not exceeded and connector location area is as specified.
4. Schematic shown is for switches with pressure ports exposed to zero lb_f/in^2.
5. Packing groove in accordance with MIL-G-5514.
6. Surface finish 125 roughness height reference, except where otherwise specified.
7. Surface finish per ANSI B 46.1.
8. Switch shall incorporate a redundant seal.

FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, weight, and electrical schematic: See figure 1.

Materials: All external parts including pressure port, housing, and electrical connector shall be fabricated from corrosion-resistant (stainless) steel suitable for welding. External parts shall be joined by welding; solder joints shall not be allowed.

Calibration: See tables I, II, III, and IV.

Proof pressure: 4500 lb_f/in^2. If a vent is not used, the electrical chamber shall withstand 4500 lb_f/in^2 without rupture.

System pressure: 3000 lb_f/in^2.

Burst pressure: 7500 lb_f/in^2.

Vent port leakage:
Leakage rate: Shall not exceed .15 cubic centimeters in 250 cycles.

Electrical ratings: See table I.
Minimum current: 25,000 cycles.
Low level: 50,000 cycles.

NOTE: Switches shall be subjected only to low level loads prior to delivery.

Seal:
Pressure chamber: Media proof, except leakage of .15 cubic centimeters (maximum) in 250 cycles is allowed.
Electrical chamber: Hermetic.

Electrical connector: See figure 1.

Pressure port: See figure 1.

Media: Hydraulic fluid per MIL-H-5606 or MIL-H-83282.

High temperature (operating and nonoperating): B (+275°F) ambient and fluid.

Low temperature (operating and nonoperating): D (-65°F) ambient; and (-40°F) fluid.

Altitude: C (70,000 ft).

Shock: C (100 G).

Vibration: S (test condition D, method 204 of MIL-STD-202, except 10 to 2,000 Hz, 20 G).

Life (mechanical): F (50,000 cycles).

Life (electrical): B (25,000 cycles).

Acceleration: C (8 G).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:18Z
Check the source to verify that this is the current version before use.

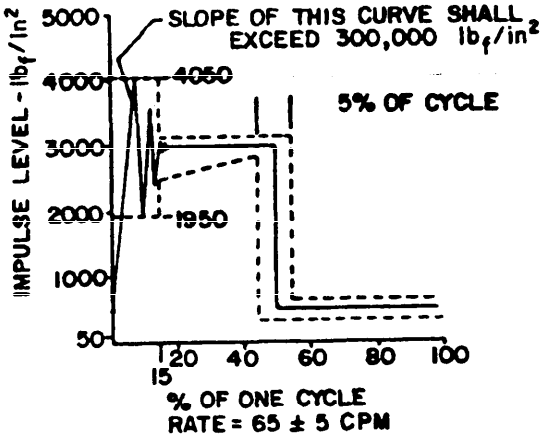


FIGURE 2. Pressure rise requirements.

Pulsation amplitude: 50 to 4050 lb_f/in^2 and back to 50 lb_f/in^2 (applied per figure 2).

Pulsation frequency: 65 ±5 cycles per minute.

Pressure rise rate: 300,000 lb_f/in^2 minimum.

Dielectric withstanding voltage (at reduced barometric pressure): Applicable.

Electrical connector torque: Applicable.

Pressure port mounting torque: 15 foot-pounds.

QUALIFICATION:

Single submission: Restricted to switch submitted.
Group submission: See table V.

PART NUMBER: Consists of "M" prefix followed by specification sheet number; a dash (-); and a five-letter code. The five-letter code identifies the configuration, electrical rating, and pressure setting mode (code from table I); high-pressure setting to within 100 lb_f/in^2 (code from table II) followed by high-pressure setting to within 25 lb_f/in^2 and applicable tolerance (code from table III); and low-pressure setting to within 100 lb_f/in^2 (code from table II) followed by low-pressure setting to within 25 lb_f/in^2 and applicable tolerance (code from table III). The five-letter code used in the following example identifies a switch of configuration 1, low level to 1 ampere electrical rating, which actuates on increasing pressure at 300 ±25 lb_f/in^2, and deactuates on decreasing pressure at 150 ±25 lb_f/in^2.

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:18Z
Check the source to verify that this is the current version before use.

EXAMPLE:

M9395/40- A C A A C

"M" PREFIX AND SPECIFICATION SHEET NUMBER

CONFIGURATION, ELECTRICAL RATING, AND PRESSURE SETTING MODE = Code "A" of table 1.

HIGH-PRESSURE SETTING = Code "C" of table II (300 lb_f/in^2) and Code "A" of table III (0, ±25 lb_f/in^2).

LOW-PRESSURE SETTING = Code "A" of table II (100 lb_f/in^2) and Code "C" of table III (+50, ±25 lb_f/in^2).

NOTE: Design limitations (actuation values and tolerances, deadband and deactuation values and tolerances) should be coordinated with manufacturer(s) listed on the QPL for this specification sheet before specifying a particular "M" number. The fact that operating characteristics can be coded does not necessarily mean that it can be manufactured or procured.

TABLE I. Codes for configurations, electrical ratings, and pressure setting modes.

	Configuration 1		Pressure setting mode	
	Low level to 1 A resistive	1.5 to 5 A resistive	High setting	Low setting
Code - -	A	D	At (or max) 1/	At (or min) 1/
Code - -	B	E	At (or max) 1/	Differential 2/
Code - -	C	F	Differential 2/	At (or min) 1/

1/ Setting values are designated by characters from tables II and III.
2/ Setting values are designated by characters from table IV.

TABLE II. Codes for pressure settings to within 100 lb_f/in^2.

Code	Pressure (lb_f/in^2)	Code	Pressure (lb_f/in^2)	Code	Pressure (lb_f/in^2)	Code	Pressure (lb_f/in^2)
A - -	100	J - -	900	S - -	1700	1 - -	2500
B - -	200	K - -	1000	T - -	1800	2 - -	2600
C - -	300	L - -	1100	U - -	1900	3 - -	2700
D - -	400	M - -	1200	V - -	2000	4 - -	2800
E - -	500	N - -	1300	W - -	2100	5 - -	2900
F - -	600	P - -	1400	X - -	2200	6 - -	3000
G - -	700	Q - -	1500	Y - -	2300		
H - -	800	R - -	1600	Z - -	2400		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:18Z
Check the source to verify that this is the current version before use.

TABLE III. Codes for pressure settings to within 25 lb_f/in^2 and tolerances.

	Unit				Tolerance (lb_f/in^2)
	0	+25	+50	+75	
Code - -	A	B	C	D	±25
Code - -	E	F	G	H	±50
Code - -	J	K	L	M	±75
Code - -	N	P	Q	R	±100
Code - -	S	T	U	V	±150
Code - -	W	X	Y	Z	±200
Code - -	1	2	3	4	±300
Code - -	5	6	7	8	±400
Code - -	9	0	I	-	Min or Max

TABLE IV. Codes for differential pressure settings. 1/

Code	Differential value (lb_f/in^2)	Code	Differential value (lb_f/in^2)
A - -	0	M - -	275
B - -	25	N - -	300
C - -	50	P - -	325
D - -	75	Q - -	350
E - -	100	R - -	375
F - -	125	S - -	400
G - -	150	T - -	425
H - -	175	U - -	450
J - -	200	V - -	475
K - -	225	W - -	500
L - -	250		

1/ Differential settings require two codes, minimum differential and maximum differential.

TABLE V. Extent of qualification.

Part number	Number of samples required	Tests	Qualifies
M9395/40-DADAA AADAA A6N3U D6N3U	2 each resistive 2 each intermediate current 2 each low level 2 each resistive	Complete per qualification inspection of MIL-S-9395	All

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - AV, MI
Navy -
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT
Navy - MC, AS, SH
Air Force - 19

Preparing activity:
Air Force - 85

(Project 5930-1055-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:18Z
Check the source to verify that this is the current version before use.

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-S-9395/40A, Switches, Pressure, (GAGE) Type II, Low Level to 5 Ampere

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER
AFLC/LOIE/STDZN
WPAFB, OH 45433

☐ VENDOR ☐ USER ☐ MANUFACTURER

☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:18Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-318

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AFLC/LOIE/STDZN
WPAFB, OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:18Z
Check the source to verify that this is the current version before use.