
MILITARY SPECIFICATION SHEET

SWITCHES, PRESSURE, GAGE (TYPE II),
LOW LEVEL TO 1 AMPERE

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the pressure switches described herein shall consist of this specification and the latest issue of MIL-S-9395.

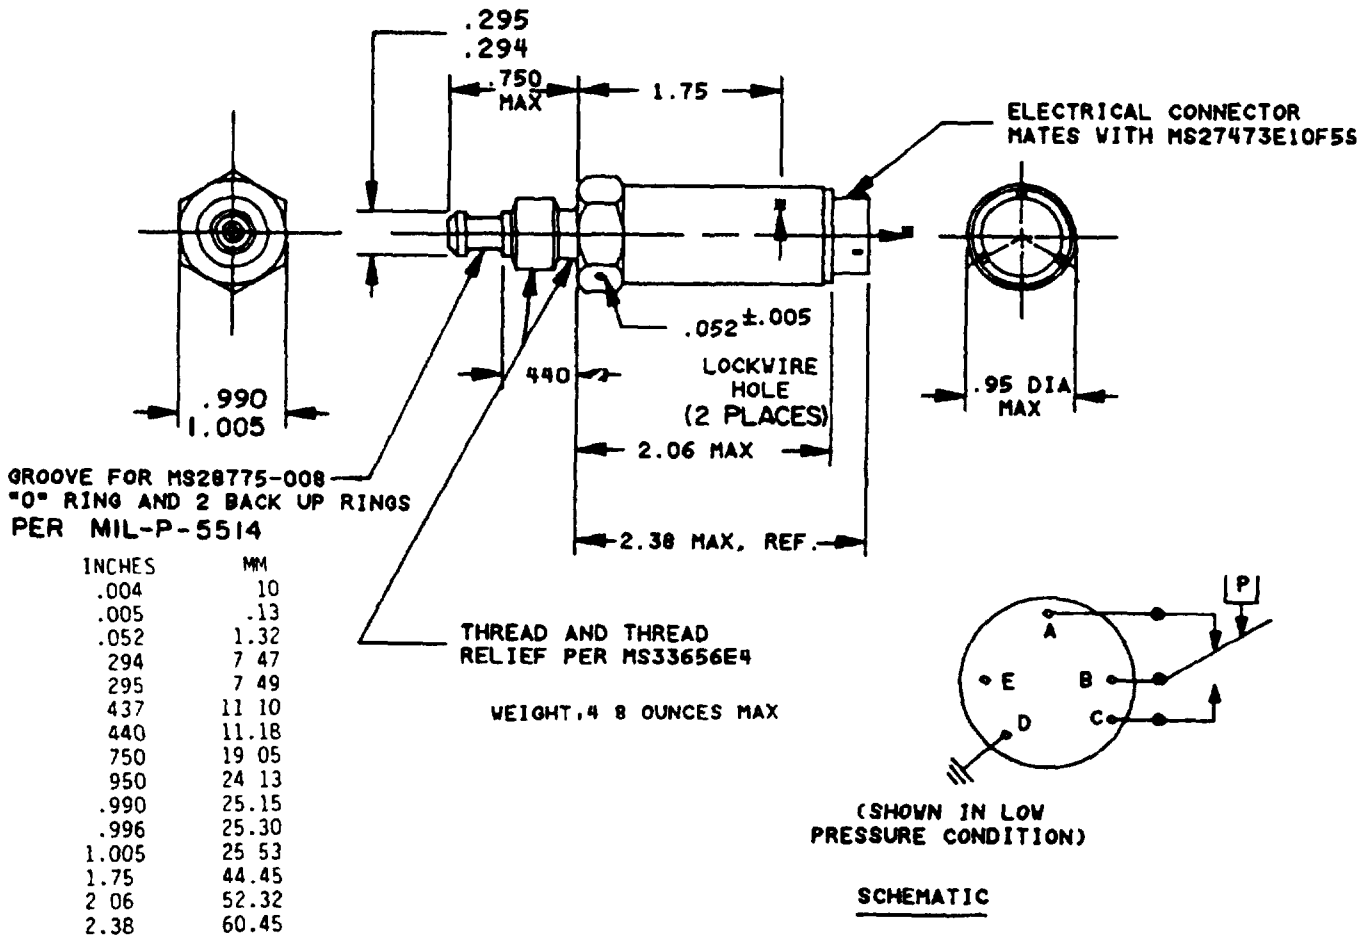

INCHES	MM
.004	10
.005	.13
.052	1.32
294	7 47
295	7 49
437	11 10
440	11.18
750	19 05
950	24 13
.990	25.15
.996	25.30
1.005	25 53
1.75	44.45
2 06	52.32
2.38	60.45

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.02 (51 mm)

FIGURE 1. Switches, pressure, gage type II.

FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, configuration, and electrical schematic: See figure 1.

Weight See figure 1.

Calibration: See tables I, II, III, and IV.

Tolerance and maximum deadband: See table I.

System pressure: 3000 lb_f/in^2.

Proof pressure: 6000 lb_f/in^2.

Burst pressure. 12,000 lb_f/in^2.

Electrical ratings:

Resistive· .010 ampere at 5 V dc, 1 ampere at 28 V dc.

Minimum current: 25,000 cycles.

Low level· 50,000 cycles.

NOTE Switches shall be subjected only to low level loads prior to delivery.

Seal:

Electrical chamber: Unsealed.

Pressure chamber. Hermetic.

Reference chamber· Unsealed.

Electrical connector. See figure 1.

Pressure port· See figure 1.

Media: Nitrogen (BB-N-411).

High temperature (operating and nonoperating): B (+275°F), 345°F for 10 minutes, 420°F for 1 minute.

Low temperature: Operating -65°F, nonoperating -80°F.

Altitude C (70,000 feet).

Shock· A (except peak value shall be 15 G).

Vibration: S (test condition C, method 204 of MIL-STD-202) except

Supplemental nonoperating sinusoidal vibration.

Sweep time: 15 minutes.

Frequency range and amplitude: 5-11 Hz, .28 inch D.A., 11-18 Hz, ±1 G; 18-58 Hz, .06 inch D.A.; 58-2000 Hz, ±10 G.

Test duration· 15 minutes in each of three mutually perpendicular planes.

Life (mechanical): A (100,000 cycles).

Life (electrical). C (50,000 cycles).

Acceleration: C (except 10 G).

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:18Z
Check the source to verify that this is the current version before use.

Pulsation amplitude: A (0 percent).

Pulsation frequency: A (0 Hz).

Pressure rise: A (less than 100 lb_f/in^2).

Dielectric withstanding voltage (at reduced barometric pressure): Applicable at 350 V rms.

Connector torque:

Electrical connector: Applicable.

Pressure port mounting torque: 100 inch-pounds maximum.

Flame test: Applicable.

Explosion: Applicable.

Qualification:

Single submission: Restricted to switch submitted.

Group submission: See table V.

Part number: Part numbers shall be assigned as follows:

Ⓐ Example: M9395/43- A 2- Z+

"M" prefix and specification sheet number.

Configuration and pressure setting mode
Code "A" of table I.

High-pressure setting
Code "2" of table II (2600 lb_f/in^2)
and Code "-" of table III (+75 max lb_f/in^2).

Low-pressure setting,
Code "Z" of table II (2400 lb_f/in^2) and
Code "+" of table III (+50 min lb_f/in^2).

Part number M9395/43-A2-Z+ describes a switch of configuration "A" which actuates on increasing pressure at 2675 lb_f/in^2 maximum and deactuates at 2450 lb_f/in^2 minimum.

Part number M9395/43-BVRST describes a switch of configuration "B" which actuates on increasing pressure at 2075 ±100 lb_f/in^2 and with a deadband value of 400 to 425 lb_f/in^2.

NOTE: Design limitations (actuation values and tolerances, deadband and deactuation values and tolerances) should be coordinated with manufacturer(s) listed on the QPL for this specification sheet before specifying a particular "M" number. The fact that operating characteristics can be coded does not necessarily mean that it can be manufactured or acquired.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:18Z
Check the source to verify that this is the current version before use.

TABLE I. Codes for combinations of configurations and pressure setting modes.

	1	Pressure setting mode	
		High setting	Low setting
Code - - -	A	At (or max) 1/	At (or min) 1/
Code - - -	B	At (or max) 1/	Deadband 2/
Code - - -	C	Deadband 2/	At (or min) 1/

1/ Setting values are designated by codes from tables II and III.
2/ Setting values are designated by codes from table IV.

TABLE II. Codes for pressure settings to within 100 lb_f/in^2.

Code	Pressure (lb_f/in^2)	Code	Pressure (lb_f/in^2)	Code	Pressure (lb_f/in^2)	Code	Pressure (lb_f/in^2)
A - -	100	J - -	900	S - -	1700	1 - -	2500
B - -	200	K - -	1000	T - -	1800	2 - -	2600
C - -	300	L - -	1100	U - -	1900	3 - -	2700
D - -	400	M - -	1200	V - -	2000	4 - -	2800
E - -	500	N - -	1300	W - -	2100	5 - -	2900
F - -	600	P - -	1400	X - -	2200	6 - -	3000
G - -	700	Q - -	1500	Y - -	2300		
H - -	800	R - -	1600	Z - -	2400		

TABLE III. Codes for pressure settings to within 25 lb_f/in^2 and tolerances.

	Unit				Tolerance (lb_f/in^2)
	0	+25	+50	+75	
Code - - -	A	B	C	D	±25
Code - - -	E	F	G	H	±50
Code - - -	J	K	L	M	±75
Code - - -	N	P	Q	R	±100
Code - - -	S	T	U	V	±150
Code - - -	W	X	Y	Z	±200
Code - - -	1	2	3	4	±300
Code - - -	5	6	7	8	±400
Code - - -	9	0	+	-	Min or Max

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:18Z
Check the source to verify that this is the current version before use.

TABLE IV. Codes for deadband pressure settings.

Code	Deadband value (lb_f/in^2)	Code	Deadband value (lb_f/in^2)
A - - -	0	M - - -	275
B - - -	25	N - - -	300
C - - -	50	P - - -	325
D - - -	75	Q - - -	350
E - - -	100	R - - -	375
F - - -	125	S - - -	400
G - - -	150	T - - -	425
H - - -	175	U - - -	450
J - - -	200	V - - -	475
K - - -	225	W - - -	500
L - - -	250		

TABLE V. Extent of qualification.

Part number M9395/43-	No. of samples required	Inspection	Qualifies
AADAA	1 each inductive	Complete per qualification inspection of MIL-S-9395	All
BADEA	1 each lamp		
A4ZXV	1 each inductive		
B4ZQ9	1 each lamp		

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AV
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Air Force - 85

(Project 5930-1294)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:18Z
Check the source to verify that this is the current version before use.