
MILITARY SPECIFICATION SHEET

SWITCH, PRESSURE, ABSOLUTE
TYPE I, 5 AMPERES

This specification sheet is approved for use by the Air Force Acquisition Logistics Division, Directorate of Electronic Support (AFALD/PTES), Gentile Air Force Station, Dayton, Ohio 45444, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-9395.

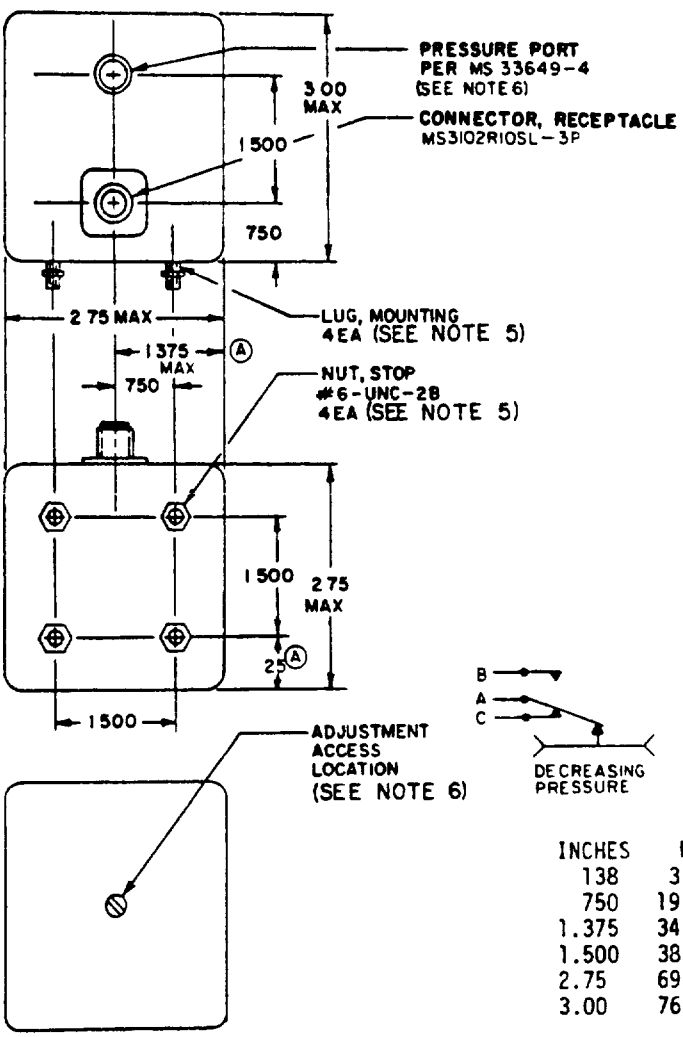

INCHES	MM
.138	3.51
.750	19.05
1.375	34.92
1.500	38.10
2.75	69.8
3.00	76.2

NOTES
1 Dimensions are in inches.
2 Metric equivalents are given for general information only and are based upon 1.00 = 25.4 mm
3 Unless otherwise specified, tolerance is ± .005 (.13 mm)
4 Exact shape of switch optional provided dimensions are not exceeded
5 Switches shall be furnished with .138-32 UNC-2B self-locking nuts and .138-32 round-head brass machine screws. Screws shall have a durable dull black finish and shall be of sufficient length to permit mounting on a .188 (4.78 mm) thick panel
6 See marking requirements

FIGURE 1 Dimensions and configuration

(A) denotes changes

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS·

Dimensions and configuration See figure.

Weight: Not to exceed 1 pound (453.6 grams).

(A) Calibration. Switch shall activate at 28 ±.5 inches Hga on decreasing pressure with a differential of 3.5 ±1 inches Hga.

Proof pressure 50 inches Hga.

Adjustment feature Switch shall be externally adjustable from 24 to 32 inches Hga.

System pressure· Not applicable.

Burst pressure· Not applicable.

Electrical ratings·
  Operating voltage - 28 Vdc.
(A) Current rating - 5 amperes resistive.

Seal:
  Electrical chamber: Unsealed.
  Pressure chamber Hermetic.
  Reference chamber. Unsealed.

Electrical connector See figure.

Pressure port See figure.

Media Air.

High temperature (operating and nonoperating) A (+ 160° F).

Low temperature (operating and nonoperating). D (- 65° F).

Altitude C (70,000 ft).

Shock A (50 G).

Vibration S (test condition A, 10-500 Hz, 10 G).

Life mechanical A (100,000 cycles).

Life electrical B (25,000 cycles).

Acceleration· C (8 G).

Pulsation amplitude A (0%).

Pulsation frequency A (0 Hz).

Pressure surge. A (less than 100 $lb_f/in^2/s$).

Dielectric withstanding voltage (at reduced barometric pressure): Applicable.

Connector torque· Applicable.

Terminal strength Applicable.

Marking The pressure switch case shall be permanently marked adjacent to the pressure port with the letter "p" and directly above or below the adjustment with "Adj". In addition, the pressure port end of the unit shall be marked as follows "CAUTION DO NOT BLOW IN PRESSURE PORT"

Part number M9395/48-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:19Z
Check the source to verify that this is the current version before use.

Custodian
Air Force - 85

Review activity
Air Force - 99

Preparing activity:
Air Force - 85

(Project 5930-F475-13)

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:19Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 73236 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

AFALD/PTS Stdn
Gentile AFS OH 45444

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-9395/48A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426

Replaces edition of 1 Jan 72 which may be used

S/N 0102 LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:19Z
Check the source to verify that this is the current version before use.