
INCH-POUND
MIL-DTL-9395/50A
24 September 2018
SUPERSEDING
MIL-DTL-9395/50
24 November 2014

DETAIL SPECIFICATION SHEET

SWITCH, PRESSURE, ABSOLUTE TYPE I, 5 AMPERES, 30.5 ± .5 INCHES HG

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this document and MIL-DTL-9395.

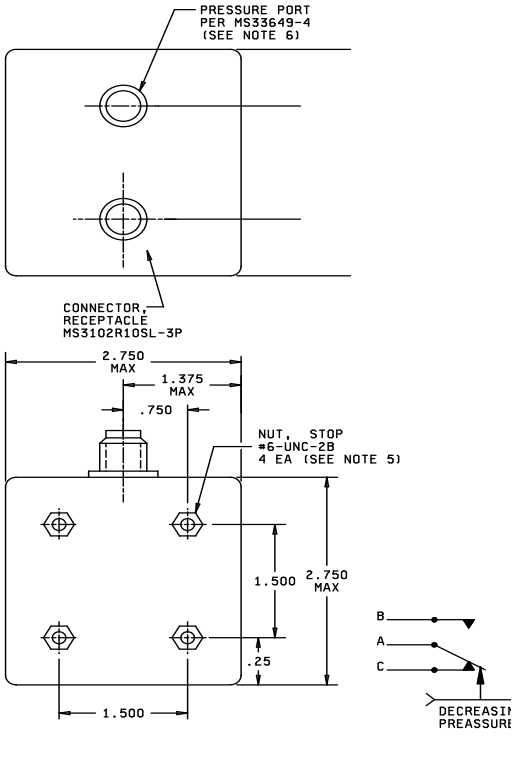

Inches	mm
.138	3.51
.750	19.05
1.375	34.92
1.500	38.10
2.75	69.8
3.00	76.2

FIGURE 1. Dimensions and configuration.

AMSC N/A

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:19Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and based upon 1.00 = 25.4 mm.
3. Unless otherwise specified, tolerance is ± .02 (.51 mm).
4. Exact shape of switch optional provided dimensions are not exceeded.
5. Switches shall be furnished with .138-32 UNC-2B self-locking nuts and .138-32 round-head brass machine screws. Screws shall have a durable dull black finish and shall be of sufficient length to permit mounting on a .188 (4.78 mm) thick panel.
6. See marking requirements.
7. MS3102R10SL-3P details are found in SAE-AS31021. MS33649-4 details are found in SAE-AS5202.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Weight: Not to exceed 1 pound (453.6 grams).

Calibration: Switch shall activate at 30.5 ± .5 inches Hga on decreasing pressure with a differential of 3.5 ±1 inches Hga. After factory calibration thread lock shall be used on the adjustment port threads.

Proof pressure: 65 inches Hga.

System pressure: Not applicable.

Burst pressure: Not applicable.

Electrical ratings:
Operating voltage: 28 V dc.
Current rating: 5 amperes resistive.

Seal:
Electrical chamber: Unsealed.
Pressure chamber: Hermetic.
Reference chamber: Unsealed.

Electrical connector: See figure 1.

Pressure port: See figure 1.

Media: Air.

High temperature (operating and nonoperating): A (+160°F).

Low temperature (operating and nonoperating): D (-65°F).

Altitude: C (70,000 ft).

Shock: A (50 G).

Vibration: S (test condition A of MIL-STD-202-204, 10-500 Hz, 10 G):

Life mechanical: A (100,000 cycles).

Life electrical: B (25,000 cycles).

Acceleration: C (8 G).

Pulsation amplitude: A (0 %).

Pulsation frequency: A (0 Hz).

Dielectric withstanding voltage (at reduced barometric pressure): Applicable.

Connector torque: Applicable

Terminal strength: Applicable.

Marking: The pressure switch case shall be permanently marked "PRESSURE PUMP SWITCH" and “30.5 +/- 0.5 In Hga” on the side opposite the mounting screws. In addition, the pressure port end of the unit shall be marked as follows: "CAUTION: DO NOT BLOW IN PRESSURE PORT"

Part number: M9395/50-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:19Z
Check the source to verify that this is the current version before use.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced Documents:
MIL-DTL-9395
MIL-STD-202-204
SAE-AS5202
SAE-AS31021

Custodians:
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2018-051)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:19Z
Check the source to verify that this is the current version before use.