

MILITARY SPECIFICATION SHEET

SWITCHES, PRESSURE, ABSOLUTE
(TYPE I), 3 AMPERES


This specification sheet is approved for use by the Air Force Acquisition Logistics Division, Directorate of Electronic Support (AFALD/PTS), Wright Patterson AFB, Ohio 45433, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-9395.

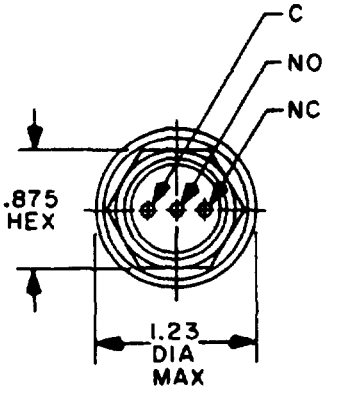



SCHEMATIC

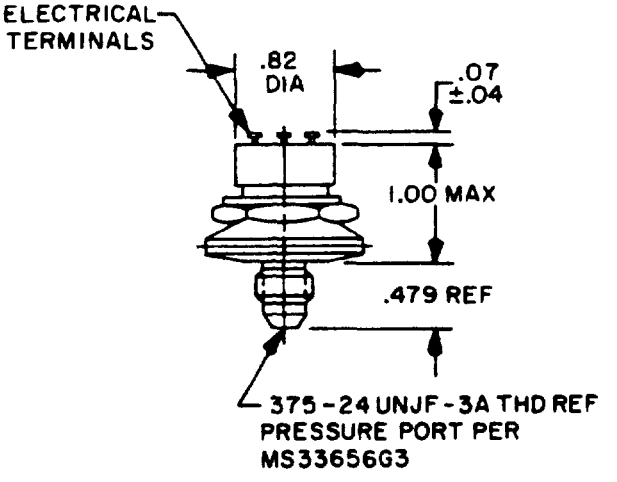



CONFIGURATION I

FIGURE 1. Switches.


FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:17Z
Check the source to verify that this is the current version before use.

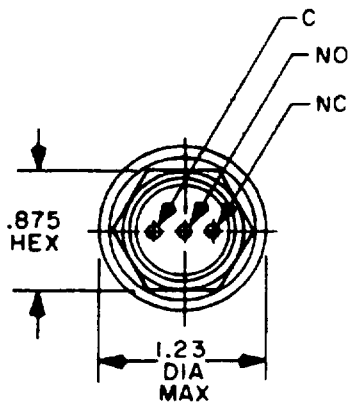



SCHEMATIC

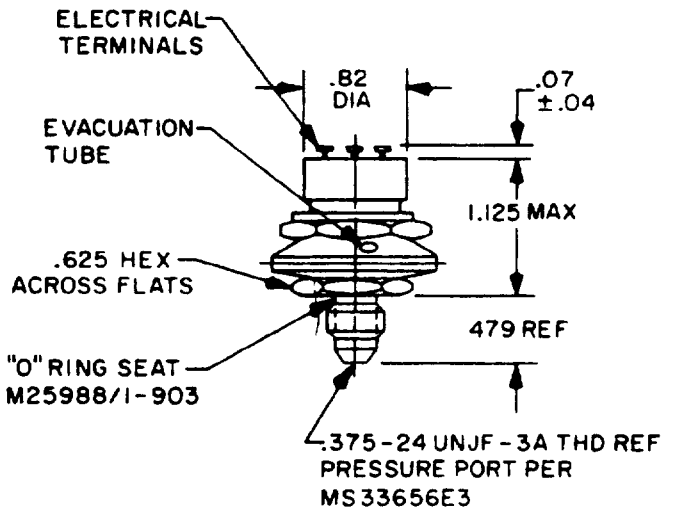

CONFIGURATION 2

INCHES	MM	INCHES	MM
.04	1.01	82	20.8
.07	1.78	.875	22.23
375	9 53	1.00	25 40
.479	12.17	1.125	28 58
625	15 88	1 23	31.24

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Exact shape of switch is optional provided outline dimensions are not exceeded.
4. Schematic shown is for switches with pressure ports exposed to zero lb_f/in^2a.
5. Terminal identification shall be permanently marked on switch body. The normally open terminal shall be designated by "NO", the normally closed by "NC", and common by "C".
6. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals and ±.02 (.5 mm) for two place decimals
7. Location of evacuation tube, if used, is optional.

FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions, configuration, and electrical schematic: See figure 1.

Mounting torque:
20 inch-pounds nominal, 30 inch-pounds maximum (0.875 inch hex);
20 inch-pounds nominal, 60 inch-pounds maximum (0.625 inch hex).

Weight: 2.0 ounces maximum

Calibration· See tables I, II, III, and IV.
Tolerance and maximum differential: See table I.

System pressure· 60 lb_f/in^2a.
Proof pressure: 90 lb_f/in^2a.
Burst pressure 250 lb_f/in^2a.

Electrical ratings:
Operating voltage - 28 Vdc.
Current rating - 3 amperes resistive.
1 ampere inductive

Seal·
Electrical chamber· Unsealed.
Pressure chamber. Hermetic.
Reference chamber: Hermetic.

Pressure port: See figure.

Media· Dry air; nitrogen, fuel per MIL-T-5624, lube oil per MIL-L-7808, or hydraulic fluid per MIL-H-5606

High temperature (operating and nonoperating)· B, except operating 203°F and nonoperating 212°F.

Low temperature (operating and nonoperating). D (-65°F)

Altitude· C (except 80,000 ft)

Shock C (100 G).

Vibration. S (test condition C, method 204 of MIL-STD-202 except 10 - 2,000 Hz, 10 G).

Life mechanical: C (50,000 cycles).

Life electrical: C (50,000 cycles)

Acceleration C (8 G)

Pulsation amplitude. A (0%).

Pulsation frequency A (0 Hz)

Pressure rise: A (less than 100 lb_f/in^2a).

Dielectric withstanding voltage·
Sea level: 1,000 Vrms.
50,000 feet 400 Vrms.

Connector torque Not applicable

Terminal strength Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:17Z
Check the source to verify that this is the current version before use.

QUALIFICATION:


Single submission· Restricted to switch submitted.
Group submission See table V

QUALITY CONFORMANCE INSPECTION: In accordance with MIL-S-9395, except prior to group A inspection, conditioning shall be performed on a 100-percent inspection basis, as follows:

1 Initial actuation and deactuation pressures shall be measured in accordance with calibration test and recorded by serial number.
2. Switches shall be tested in accordance with method 107 of MIL-STD-202, condition A, except -55°C to +100°C; no measurements are required
3 Switches shall be stored at $+85^{\circ}{}^{-0^{\circ}}_{+10^{\circ}}$C for 168 $^{-0}_{+8}$ hours, no measurements are required
4 At the completion of steps 2 and 3, final actuation and deactuation pressures shall be measured in accordance with calibration test. The measurements shall be within the applicable values of tables I thru IV and shall not change from the initial measurements of step 1 by more than 1.0 lb_f/in^2a for both parameters

PART NUMBER: Consists of the prefix M9395/35- and a three-letter code. The three-letter code identifies the configuration and contact action (code from table II); pressure setting to within 1.0 lb_f/in^2a (code from table III), and pressure setting to within .5 lb_f/in^2a (code from table IV) The three-letter code used in the following example identifies a switch of configuration 1 which actuates on increasing pressure at 18.0 $\pm$.75 lb_f/in^2a with a maximum differential of 2.5 lb_f/in^2a.

EXAMPLE

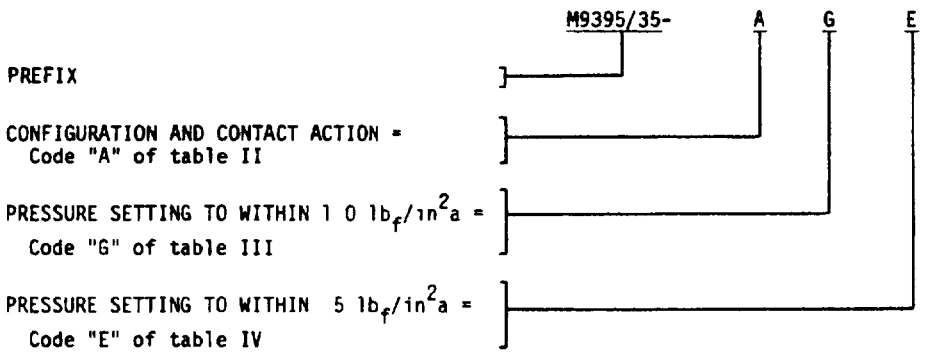

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:17Z
Check the source to verify that this is the current version before use.

TABLE I. Tolerances and maximum differential values for each pressure setting.

Pressure (lb_f/in^2a)	Tolerance (lb_f/in^2a)±	Maximum differential (lb_f/in^2a)	Pressure (lb_f/in^2a)	Tolerance (lb_f/in^2a)±	Maximum differential (lb_f/in^2a)
1.0 - 10.5	.5	2	43.5 - 44.0	1.5	4.5
11.0 - 20.0	.75	2.5	44.5	1.5	4.6
20.5 - 29.5	1.0	3.0	45.0 - 45.5	2.0	4.7
30.0 - 30.5	1.0	3.1	46.0 - 46.5	↓	4.8
31.0	1.5	3.2	47.0 - 47.5	↓	4.9
31.5 - 32.0	↓	3.3	48.0 - 48.5	↓	5.0
32.5 - 33.0	↓	3.4	49.0 - 49.5	↓	5.1
33.5 - 34.0	↓	3.5	50.0 - 50.5	↓	5.2
34.5 - 35.0	↓	3.6	51.0 - 51.5	↓	5.3
35.5 - 36.0	↓	3.7	52.0 - 52.5	↓	5.4
36.5 - 37.0	↓	3.8	53.0 - 53.5	↓	5.5
37.5 - 38.0	↓	3.9	54.0 - 54.5	↓	5 6
38.5 - 39.0	↓	4.0	55.0 - 55.5	↓	5.7
39.5 - 40.0	↓	4.1	56.0 - 56.5	↓	5.8
40.5 - 41.0	↓	4.2	57.0 - 57 5	↓	5.9
41.5 - 42.0	↓	4.3	58.0 - 58.5	↓	6.0
42.5 - 43 0	1.5	4.4	59.0 - 59.5	↓	6.1
			60.0	2.0	6.2

TABLE II. Configuration and contact action.

	Configuration		Contact action
	1	2	
Code - -	A	C	Actuates on increasing pressure
Code - -	B	D	Actuates on decreasing pressure

TABLE III. Pressure setting to within 1 lb_f/in^2a

Code	Pressure	Code	Pressure	Code	Pressure
A - - - -	2.0	J - - - -	22.0	S - - -	42.0
B - - - -	4.5	K - - - -	24.5	T - - -	44.5
C - - - -	7.0	L - - - -	27.0	U - - -	47.0
D - - - -	9.5	M - - - -	29.5	V - - -	49 5
E - - - -	12 0	N - - - -	32.0	W - - -	52 0
F - - - -	14.5	P - - - -	34 5	X - - -	54.5
G - - - -	17.0	Q - - - -	37.0	Y - - -	57 0
H - - - -	19.5	R - - - -	39.5	Z - - -	59 5

TABLE IV. Pressure setting to within .5 lb_f/in^2a

Code	Unit
A - -	-1.0
B - -	-0.5
C - -	0
D - -	0.5
E - -	1.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:17Z
Check the source to verify that this is the current version before use.

TABLE V Extent of qualification

Part number	Number of samples required	Tests	Qualifies
M9395/35-BAA CZB	4 ea. resistive 4 ea. inductive	Complete per qualification inspection of MIL-S-9395	All

Custodian
Air Force - 85

Review activities
Air Force - 99
DLA - ES

Preparing activity
Air Force - 85

(Project 5930-F475-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:17Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-9395/35C, 18 September 1979

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO
	DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:17Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-318

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AFALD/PTES-Standardization
WPAFB, OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:17Z
Check the source to verify that this is the current version before use.