[INCH-POUND]
A-A-3088
November 6, 1996

COMMERCIAL ITEM DESCRIPTION

BLADE, RECIPROCATING SAW, 1/4-INCH UNIVERSAL SHANK (JIG SAW BLADE)

The General Services Administration has authorized the use of this Commercial Item Description for the procurement of the type I, 1/4-inch shank, style A and B blades specified in GGG-B-425 for all federal agencies.

1. SCOPE.

1.1 Scope. This Commercial Item Description covers 1/4-inch universal shank jig saw blades for use in portable electric jig saws.

2. CLASSIFICATION.

2.1 Classification. This Commercial Item Description shall be of the following styles:

Style A - Wood cutting
Style B - Metal cutting

3. SALIENT CHARACTERISTICS.

3.1 Design. The saw blades shall be suitable for use on most commercially available reciprocating saws with a maximum speed of 2600 strokes per minute and a maximum length of stroke of 3/4 inch, where the blade is mounted at a right angle to the motor axis and are designed to accommodate a "universal" style of shank. The teeth shall be uniform in shape and size, and shall be ground or otherwise sharpened so that cutting will occur on the reverse stroke. The blades shall be straight and flat with a maximum bow of 0.02 inch and a maximum twist of 0.01 inch. The blades shall be similar to Figure 1 and conform to the requirements specified in Table I.

3.1.1 Style A, wood cutting blades. The style A, wood cutting blades shall be suitable for cutting nail-free wood, shall be made of carbon or alloy steel, and shall have a minimum hardness of 41 on the Rockwell C scale when tested in accordance with ASTM E18. The teeth shall have a raker or alternate set, a back clearance of 50° to 70°, and a maximum negative rake of 10°, as shown in Figures 2 and 3. The blades that are ground shall have a fleam angle of 20° $\pm$ 2°. The blades that are milled shall have a tooth set of 0.012 inch $\pm$ 0.005 inch. When specified (see 7.2), bi-metal blades shall be furnished for style A blades. The cutting edge of the bi-metal blade shall be constructed of high-speed steel. The back shall be constructed of carbon or high-speed steel. The back shall have a hardness of 44 to 52 on the Rockwell C scale when tested in accordance with ASTM E18. The cutting edge or teeth shall have a hardness of 62 to 69 on the Rockwell C scale when tested in accordance with ASTM E18. The teeth shall have either a wave set or raker set as specified herein.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center, Kansas City, MO 64131.

Distribution Statement A. Approved for public release; distribution is unlimited.

FSC 5130

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

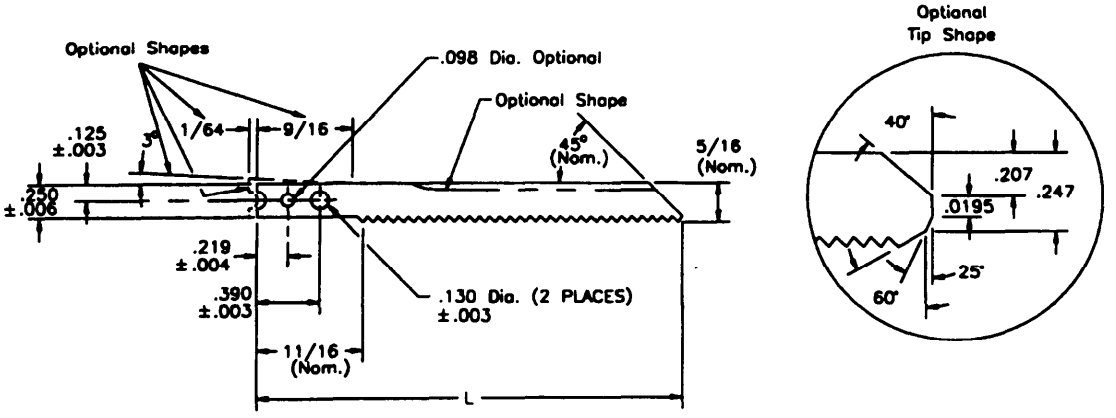


Figure 1. Blades, reciprocating saw, 1/4 inch universal shank.

TABLE I. Blades, reciprocating saw, 1/4 inch universal shank

Style	Size	No. of teeth per inch	L Length (± 1/2 inch) (Inches)	Blade thickness (minimum) (Inch)
A	1	6 to 7	2-7/8	0.030
	2	10 to 12	2-7/8	0.030
B	1	18	2-3/4	0.030
	2	24	2-3/4	0.030
	3	32 to 36	2-1/2	0.030

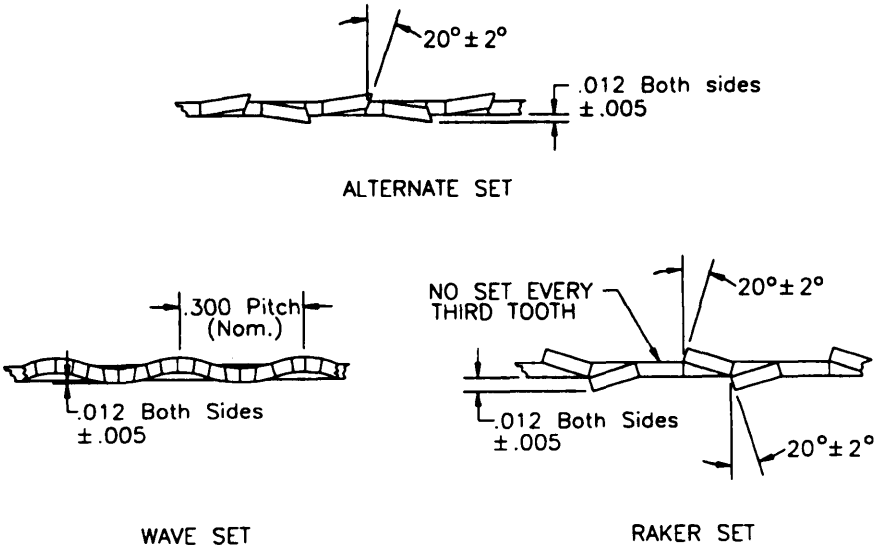


Figure 2. Tooth set.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

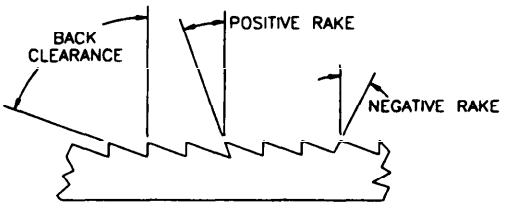


Figure 3. Back clearance and rake angles.

3.1.2 Style B, metal cutting blades. The style B, metal cutting blades shall be suitable for use in cutting metals, plastics, and fiberglass and shall be made of high-speed steel. The blades shall have a hardness of 57 to 66 on the Rockwell C scale when tested in accordance with ASTM E18. The teeth shall have a wave set or rake set, a back clearance of 50° to 70° and a rake of 0° ± 5°, as shown in Figures 2 and 3. When specified (see 7.2), bi-metal blades shall be furnished for style B blades. The cutting edge of the bi-metal blade shall be constructed of high-speed steel. The back shall be constructed of carbon or high-speed steel. The back shall have a hardness of 44 to 52 on the Rockwell C scale when tested in accordance with ASTM E18. The cutting edge or teeth shall have a hardness of 62 to 69 on the Rockwell C scale when tested in accordance with ASTM E18. The teeth shall have either a wave set or raker set as specified herein.

3.2 Protective coating. All blades shall have a protective coating of oil, paint, or lacquer in accordance with the manufacturers standard commercial practice.

3.3 Identification marking. The blade shall be marked with the manufacturer's name or identifying symbol and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, stamped, or painted directly on the item's surface.

3.4 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g., sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements which are not contractually specified, the provided product shall conform to the producer's own drawings, standards, specifications, and quality assurance practices for the highest quality product commercially offered by the producer. If the product is not commercially offered by the producer, the best commercial practices shall apply. The Government reserves the right to require proof of such conformances prior to first delivery and thereafter as provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics by the Government. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

6. PACKAGING.

6.1 Packaging. Requirements of preservation, packing, packaging, and marking of packages shall be as specified in the contract or order.

7. NOTES.

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Specifications and Standards: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

Federal Acquisition Regulations (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20402-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, P.O. Box 3005, 611 East Wisconsin Avenue, Milwaukee, WI 43201-4606.

ASTM E18: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN(s).
(c) When applicable, the specific style and size, as specified in the Commercial Item Description.
(d) If bid samples are required, the number of samples required, and the subjective inspection requirements.
(e) If first article samples are required and the number of samples required.
(f) If lot sampling inspection is required and the applicable lot sampling requirements. For example:

Sampling for inspection. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Inspection. Each sample tool shall be examined and tested for all salient characteristics. The Inspection Level shall be S-2 with an Acceptable Quality Level of 4.0, expressed in terms of defects per hundred units.

(g) Specify bi-metal design, if required (see 3.1.1 and 3.1.2).
(h) What preservation, packing, packaging, and marking of packages are required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

7.3 National Stock Numbers (NSNs). The following list of NSNs corresponds to the styles specified in this CID. This list may not be indicative of all possible NSNs associated with this CID.

NSN		
5130-00-967-9709	-	Style A, size 1
5130-00-086-0133	-	Style A, size 2
5130-00-967-9708	-	Style B, size 1
	-	Style B, size 2
5130-00-967-9707	-	Style B, size 3

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions or notices to this Commercial Item Description until further notice.

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.