INCH-POUND

MS27487E
~~12 July 2002~~
SUPERSEDING
MS27487D
2 January 1976

DETAIL SPECIFICATION SHEET

Connectors, Adapter, Electrical, Threaded, Kit, Straight and 90 Degrees, EMR Hardware, Series I and II

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-38999.

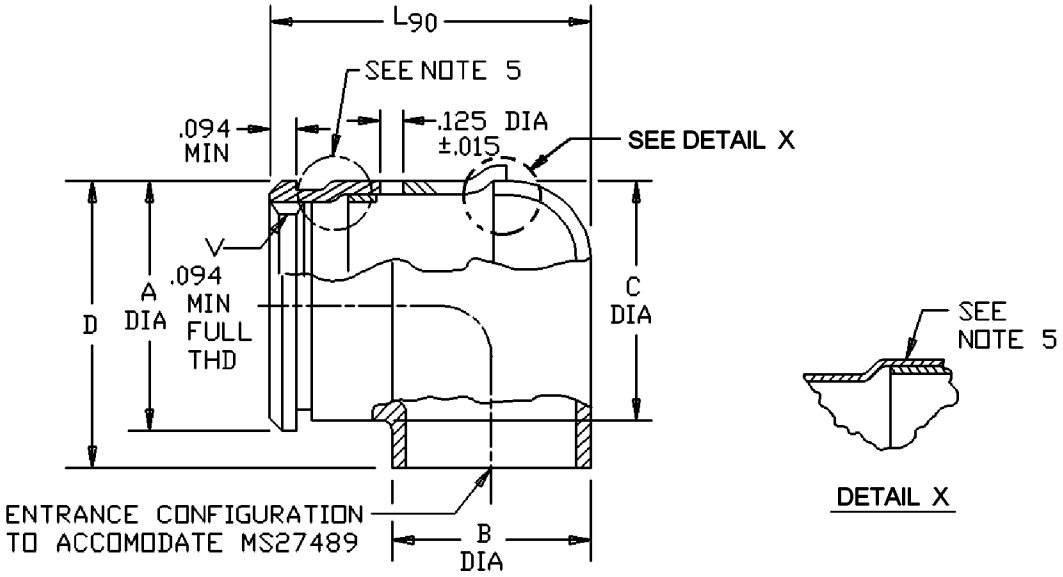

90° ELBOW ADAPTER

FIGURE 1. ~~Adapter~~.

~~DISTRIBUTION STATEMENT A~~. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

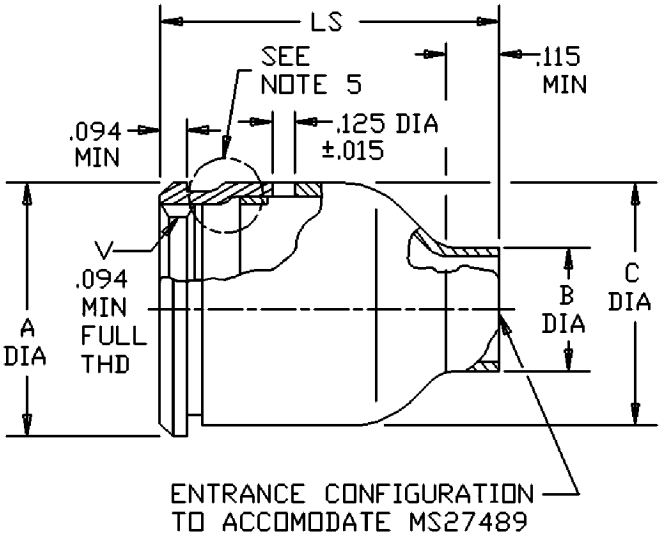

FIGURE 1. ~~Adapter~~ – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

Shell size series I	Shell size series II	A dia max	B dia max	C dia max	D dia max	LS max	L_{90} max	V Thread UNEF class 2B
9	8	.594	.359	.516	.656	.844	.719	.4375-28
11	10	.719	.406	.641	.781	.969	.766	.5625-24
13	12	.844	.500	.766	.938	1.094	.859	.6875-24
15	14	.969	.578	.891	1.062	1.156	.938	.8125-20
17	16	1.094	.641	1.016	1.219	1.219	1.000	.9375-20
19	18	1.219	.688	1.141	1.344	1.344	1.047	1.0625-18
21	20	1.344	.734	1.265	1.469	1.469	1.094	1.1875-18
23	22	1.469	.796	1.391	1.594	1.594	1.156	1.3125-18
25	24	1.594	.859	1.516	1.719	1.719	1.219	1.4375-18

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Material: Copper alloy. Finish shall be Tin-lead, solder plated.
4. Type 1 may be of a two-piece construction. Type 2 may be of a three-piece construction. Individual pieces shall be shipped unassembled.
5. Method of joining components is optional.

FIGURE 1. ~~Adapter~~ – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MIL-DTL-38999.
Mating connectors: MIL-DTL-38999 series I and series II.

Qualification:

Examination of product.
Mating and unmating forces.
Humidity.
Salt spray (corrosion).
Altitude immersion.

Group A sampling inspection. 100% inspection is not applicable. Sampling inspection shall be in accordance with table I:

TABLE I. ~~Group A sampling plan~~.

Lot size	Sample size
1 to 13	100 percent
14 to 150	13 units
151 to 280	20 units
281 to 500	29 units
501 to 1,200	34 units
1,201 to 3,200	42 units

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

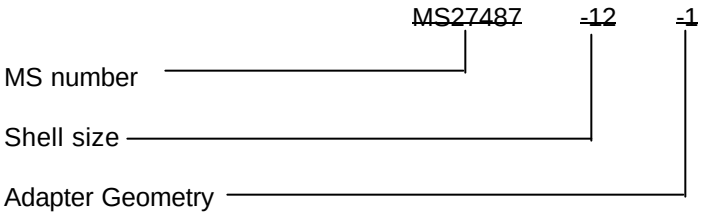

-1: Straight adapter
-2: 90° elbow adapter

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5935-4397)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.