FED. SUP CLASS
4730

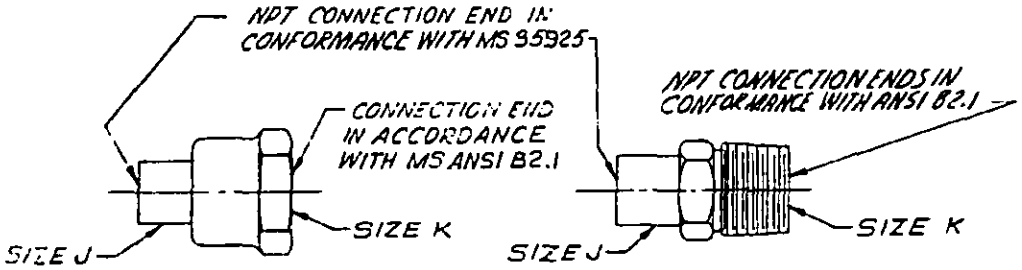

FEMALE ADAPTER
FIG 1

MALE ADAPTER
FIG 2

MS PART NUMBER		SIZE
FIG 1	FIG 2	J X K
MS 35918 -1	MS 35918 -1M	$\frac{3}{8} \times \frac{1}{4}$
MS -2	MS -2M	$\frac{1}{2} \times \frac{3}{8}$
MS -3	MS -3M	$\frac{1}{2} \times \frac{1}{2}$
MS -4	MS -4M	$\frac{5}{8} \times \frac{1}{2}$
MS -5	MS -5M	$\frac{5}{8} \times \frac{3}{4}$
MS -6	MS -6M	$\frac{5}{8} \times \frac{7}{8}$
MS -7	MS -7M	$\frac{7}{8} \times \frac{3}{4}$
MS -8	MS -8M	$\frac{7}{8} \times \frac{1}{2}$
MS 35918 -10	MS 35918-10M	$1\frac{1}{8} \times \frac{3}{4}$

(B) 1. FITTINGS SHALL BE MADE FROM MATERIALS CONFORMING TO ASTM B 170-70 Grade 2 OR TO ANSI B 16 22, STRESS RELIEVED DRAWN BRASS ROD CONFORMING TO ALLOY NO. 360, TEMPER HALF HARD OR AS EXTRUDED OR FORGING COPPER ALLOY NO. 377, TEMPER AS EXTRUDED OF QQ-B-626.

2. FITTINGS SHALL BE OF ONE PIECE, SEAMLESS BRASS CONSTRUCTION. THE MAXIMUM ALLOWABLE VARIATION IN THE ALIGNMENT OF ALL OPENINGS SHALL BE 1/16 INCH IN ONE FOOT.
3. ALL DIMENSIONS GIVEN IN INCHES.
4. REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(A) ENTIRE STANDARD REVISED

APPROVED 22 DEC 1954 REVISED (A) 2 OCT '67 (B) 19 SEPT 1972

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review: Army MI, Navy MS, USAF 85, DSA GS
User: SH HC

P.A. ARMY GL Other Cust USAF-82	TITLE ADAPTER, STRAIGHT, PIPE THREAD TO TUBE, MALE SOLDER-JOINT, REFRIGERATION	MILITARY STANDARD MS 35918
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.