FED. SUP CLASS
4730

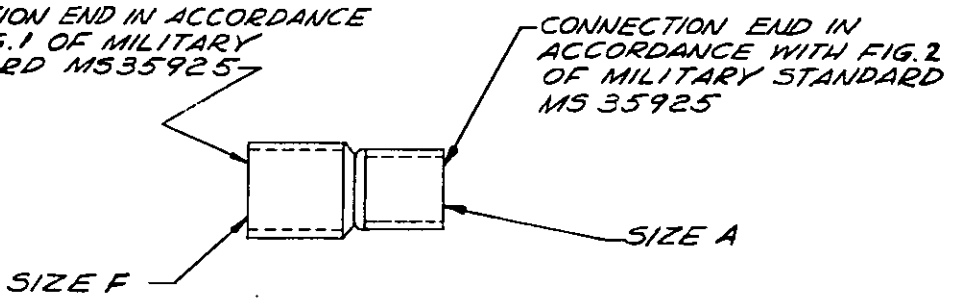

REDUCING COUPLING
MALE TO FEMALE

© DASH NUMBER	SIZE F x A
-1	3/8 x 1/4
-2	1/2 x 1/4
-3	1/2 x 3/8
-4	5/8 x 3/8
-5	5/8 x 1/2
-6	3/4 x 1/2
-7	3/4 x 5/8
-8	7/8 x 3/8
-9	7/8 x 1/2
-10	7/8 x 5/8
-11	7/8 x 3/4
-12	1 1/8 x 1/2
-13	1 1/8 x 5/8
-14	1 1/8 x 7/8
-15	1 3/8 x 5/8
-16	1 3/8 x 7/8
-17	1 3/8 x 1 1/8

1. FITTINGS SHALL BE MADE FROM COPPER CONFORMING TO ASTM B 75 COPPER NOS. 102, 120, OR 122.
2. FITTINGS SHALL BE OF ONE PIECE, SEAMLESS WROUGHT-COPPER CONSTRUCTION. THE MAXIMUM ALLOWABLE VARIATION IN THE ALIGNMENT OF ALL OPENINGS SHALL BE 1/16 INCH IN ONE FOOT.
3. ALL DIMENSIONS GIVEN IN INCHES.
4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.
©6. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 35920-1.

APPROVED 22 SEPT 52 REVISED (A) 28 SEPT 1967 (B) 19 SEPT 72 (C) 21 JAN 76

Review User
Army MC
Navy ME

Military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY - GL; Other Cust; USAF - 85	TITLE: REDUCER COUPLING, TUBE, MALE TO FEMALE SOLDER-JOINT, REFRIGERATION	MILITARY STANDARD MS 35920
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Continuation) M-58

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:31Z
Check the source to verify that this is the current version before use.