FED. SUP CLASS
4730

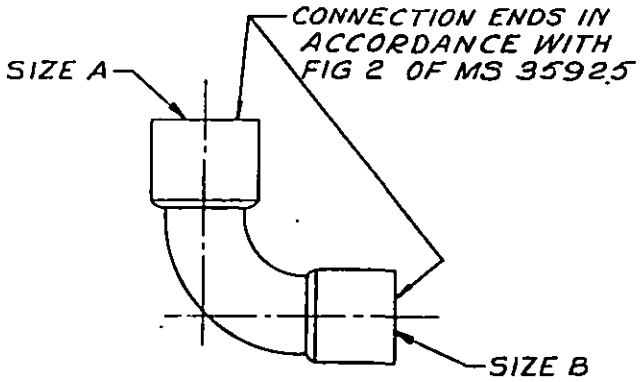

REDUCING ELBOW

© DASH NUMBER	SIZE A X B
-32	$\frac{2}{8} \times \frac{1}{4}$
-43	$\frac{1}{2} \times \frac{3}{8}$
-54	$\frac{5}{8} \times \frac{1}{2}$
-65	$\frac{3}{4} \times \frac{5}{8}$
-74	$\frac{7}{8} \times \frac{1}{2}$
-75	$\frac{7}{8} \times \frac{5}{8}$
-95	$1\frac{1}{8} \times \frac{5}{8}$
-97	$1\frac{1}{8} \times \frac{7}{8}$
-117	$1\frac{3}{8} \times \frac{7}{8}$
-119	$1\frac{3}{8} \times 1\frac{1}{8}$

1. FITTINGS SHALL BE MADE FROM COPPER CONFORMING TO ASTM B 75 COPPER NOS. 102, 120, OR 122.
2. FITTINGS SHALL BE OF ONE PIECE, SEAMLESS WROUGHT-COPPER CONSTRUCTION. THE MAXIMUM ALLOWABLE VARIATION IN THE ALIGNMENT OF ALL OPENINGS SHALL BE 1/16 INCH IN ONE FOOT.
3. ALL SIZES SHOWN ARE OUTSIDE DIAMETER TUBE SIZES.
4. ALL DIMENSIONS GIVEN IN INCHES.
5. *REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.*
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
©7. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 35922-32. THE FIRST DASH NUMERAL IS END CONNECTION SIZE A. THE SECOND DASH NUMERAL IS END CONNECTION SIZE B, BOTH IN INCREMENTS OF 1/8 INCH.

APPROVED 28 SEPT 59 REVISED (A) 5 JULY 1961 (B) 19 SEPT 72 (C) 9 DEC 75

Preview User
Army - MC MC
Navy - SH

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY - GL Other Cust USAF - 82	TITLE ELBOW, TUBE, 90 DEGREE, REDUCING, SOLDER-JOINT, REFRIGERATION	MILITARY STANDARD MS 35922
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Cancelled)
Previous editions of this form are obsolete.
U.S. GOVERNMENT PRINTING OFFICE: 1975-603-766:2039

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:31Z
Check the source to verify that this is the current version before use.