FED. SUP CLASS
4730

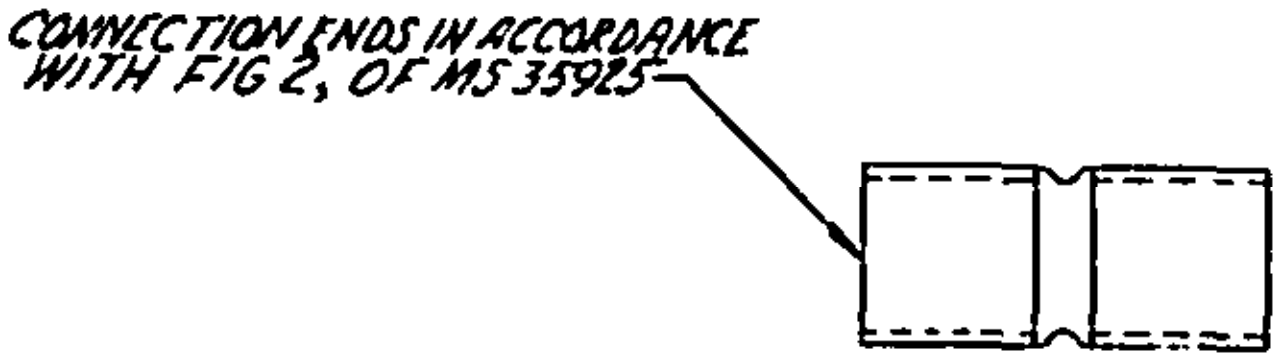

COUPLING WITH STOP

Ⓒ

DASH NUMBER	SIZE
-2	$\frac{1}{4}$
-3	$\frac{3}{8}$
-4	$\frac{1}{2}$
-5	$\frac{5}{8}$
-6	$\frac{3}{4}$
-7	$\frac{7}{8}$
-9	$1\frac{1}{8}$
-11	$1\frac{3}{8}$
-13	$1\frac{5}{8}$
-17	$2\frac{1}{8}$
-21	$2\frac{5}{8}$
-25	$3\frac{1}{8}$
-29	$3\frac{5}{8}$
-33	$4\frac{1}{8}$

1. FITTINGS SHALL BE MADE FROM COPPER CONFORMING TO ASTM B 75 COPPER NOS. 102, 120, OR 122.
2. FITTINGS SHALL BE OF ONE PIECE, SEAMLESS WROUGHT-COPPER CONSTRUCTION. THE MAXIMUM ALLOWABLE VARIATION IN THE ALIGNMENT OF ALL OPENINGS SHALL BE 1/16 INCH IN ONE FOOT.
3. ALL DIMENSIONS GIVEN IN INCHES.
4. ALL SIZES SHOWN ARE OUTSIDE DIAMETER TUBE SIZES.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.

Ⓒ7. PART NUMBER: THE MS NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 35927-2.

REVISED Ⓐ 29 JAN 69 Ⓑ 19 SEPT 72 Ⓒ 9 DEC 75

APPROVED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review User
Army ME
Navy SH YD
DSA CS

P.A. ARMY-GL
Other Cust
NAVY-YD
USAF-82

PROCUREMENT SPECIFICATION

TITLE
COUPLING, TUBE, WITH STOP,
SOLDER-JOINT, REFRIGERATION

SUPERSEDES:

MILITARY STANDARD
MS 35927

SHEET OF

DD FORM 1 SEP 63 672-1 (Continued)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:31Z
Check the source to verify that this is the currentversion before use.