FED. SUP CLASS
4730

CONNECTION ENDS IN ACCORDANCE WITH FIG 2 OF MILITARY STANDARD MS35925

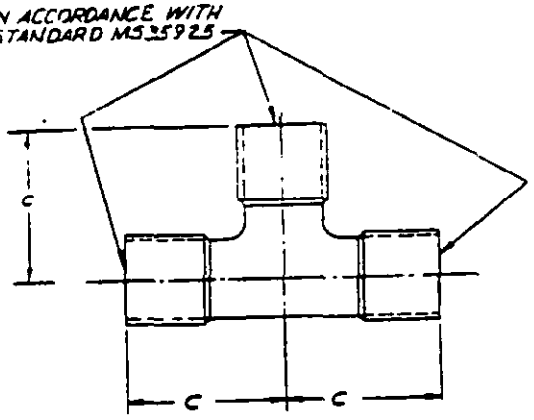

MS PART NUMBER	SIZE	C
MS 35929 - 2	1/4	MANUFACTURER'S STANDARD DIMENSIONS
- 3	3/8	
- 4	1/2	
- 5	5/8	
- 6	3/4	
- 7	7/8	
- 9	1 1/8	
- 11	1 3/8	
- 13	1 5/8	
- 17	2 1/8	
- 21	2 5/8	
- 25	3 1/8	
- 29	3 5/8	
MS 35929 - 33	4 1/8	

© 1. FITTINGS SHALL BE MADE FROM COPPER CONFORMING TO ASTM B 75 COPPER NOS. 102, 120, or 122.

2. DIMENSIONS IN INCHES.

3. MAXIMUM ALLOWABLE VARIATION IN THE ALIGNMENT OF ALL OPENINGS SHALL BE 1/16 INCH IN ONE FOOT.

4. REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.

(B) ENTIRE STANDARD REVISED

APPROVED 22 SEPT 1958 REVISED (A) 16 APRIL 63 (B) 28 DEC 1967 (C) 19 SEPT 72

Review: Army ME, Navy MS, USAF DS, DSA CS
User: AU, SH MC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Army - SL
Other Cust USAF - 82

TITLE: TEES, TUBE, STRAIGHT, SOLDER-JOINT, REFRIGERATION

MILITARY STANDARD
MS 35929
SHEET 1 OF 1

PROCUREMENT SPECIFICATION: NONE

SUPERSEDES:

DD FORM 672-1 (Continued)

U.S. GOVERNMENT PRINTING OFFICE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:31Z
Check the source to verify that this is the current version before use.