PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: VOLTMETER AND AMMETER, DC (SQUARE FLANGE, 1 INCH), STYLE 03

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the meters described herein shall consist of this specification and MIL-PRF-10304.

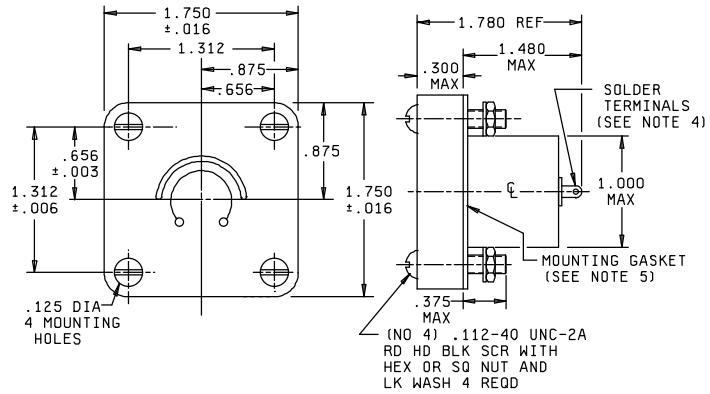

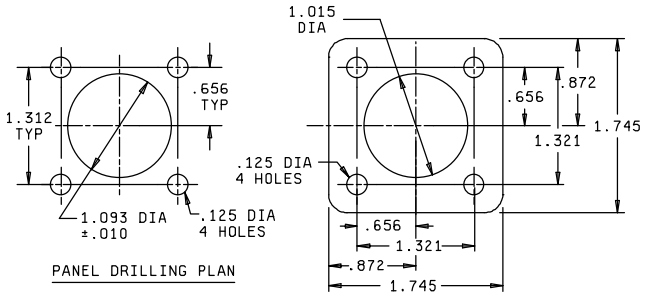

PANEL DRILLING PLAN

ITEM IS SYMMETRICAL ABOUT BOTH CENTER LINES

GASKET

Inches	mm	Inches	mm
.010	.25	1.000	25.40
.016	.41	1.015	25.78
.112	2.84	1.093	27.76
.125	3.18	1.312	33.32
.300	7.62	1.480	37.59
.375	9.53	1.745	44.32
.656	16.66	1.750	44.45
.872	22.15	1.780	45.21
.875	22.23		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm).
4. Terminal location is optional.
5. Supplied with .035 (.89 mm) black rubber mounting gasket. Past experience has shown that gaskets in accordance with ASTM D2000 (e.g., grade no. M5 BC 410 A14 B14 F19) allows the meter to meet the performance requirements of this specification.

FIGURE 1. Meter, panel type.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Full-scale ranges: See table I.

Scale:
Length: 1.5 inches minimum.
Pointer deflection: 180° nominal.

Position influence: ±2 percent maximum change for 60° rotation from normal operating position.

Accuracy: ±2 percent.

Overshoot: 57 percent maximum.

Response time:
2.5 seconds maximum on milliammeters and voltmeters.
3 seconds maximum on microammeters.

Power consumption:
Microammeters: 750 mV maximum
Millimmeters: 150 mV maximum
Voltmeters: 1 mA ±5 percent

High temperature cycling:
±4 percent maximum change (ammeters).
±3 percent maximum change (voltmeters).
±2 percent maximum permanent change.

Temperature influence:
±.75 percent maximum change (voltmeters).
±1 percent change (ammeters).

Exposure to extreme temperatures: ±3 percent maximum permanent change (ammeters and voltmeters).

Overload capacity:
Momentary overload: ±2 percent maximum permanent change.
Sustained overload:
±1 percent maximum temporary zero shift.
±1 percent maximum permanent zero shift.
±2 percent maximum permanent change.

Dielectric withstanding voltage: 1,300 volts rms.

Vibration, random drop, and shock: Repeatability is not acceptable for those microammeters below 100-microampere ranges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:50Z
Check the source to verify that this is the current version before use.

TABLE I. Full-scale ranges.

Voltmeters		Ammeters			
Volts		Microamperes		Milliamperes	
Zero left	Zero center	Zero left	Zero center	Zero left	Zero center
0.1	10-0-10	30	30-0-30	1	5-0-5
2	30-0-30	50	50-0-50	5	30-0-30
10	50-0-50	100	100-0-100	10	50-0-50
20		200	300-0-300	30	100-0-100
50		300	500-0-500	50	200-0-200
100		500		100	
150				200	
200				300	
				500	

Custodians:
Air Force - 99
Army - CR
Navy - SH
DLA – CC

Review activities:
Army - AR, AT, AV, CR4
Navy - AS, MC

Preparing activity:
DLA - CC

(Project 6625-0873)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:50Z
Check the source to verify that this is the current version before use.