INCH-POUND
MIL-PRF-10304/21G
w/AMENDMENT 1
18 January 2008
SUPERSEDING
MIL-PRF-10304/21G
26 April 1999

PERFORMANCE SPECIFICATION SHEET
METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED:
VOLTMETER, DC (SQUARE FLANGE, 1.5 INCH), STYLE 13

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification sheet and MIL-PRF-10304.

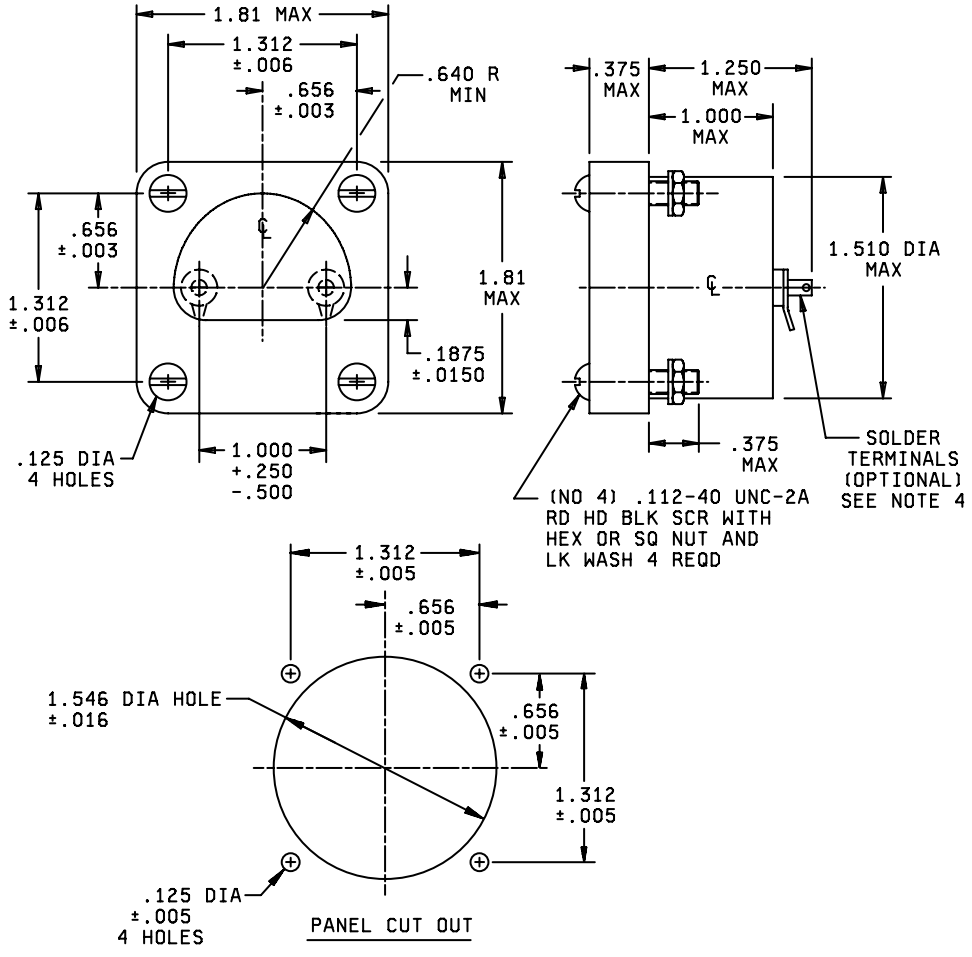



FIGURE 1. Meter, panel type.

AMSC N/A

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:51Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .003 | .08 | .016 | .41 | .500 | 12.70 | 1.312 | 33.32 |
| .005 | .13 | .125 | 3.18 | .640 | 16.26 | 1.510 | 38.35 |
| .006 | .15 | .1875 | 4.76 | .656 | 16.70 | 1.546 | 39.28 |
| .0150 | .38 | .250 | 6.35 | 1.000 | 25.40 | 1.81 | 45.97 |
| | | .375 | 9.53 | 1.250 | 31.75 | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerances are ± .005 inch (.13 mm).
4. The center line of the terminals may be located .188 (4.78 mm) above or below the center line of the meter.
5. Letters and numerals for scale numerals and captions shall be .085 (2.16 mm) max and all others shall be .050 (1.27 mm) max.
6. Other forms of terminals, as specified in MIL-PRF-10304, are permitted. The specified minimum length applies to stud-type terminals only. Terminals shall be equally spaced, from each side of vertical centerline.

FIGURE 1. Meter, panel type - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Weight: 4 ounces maximum.

Full-scale ranges: See table I.

Scale:

Length: 1 inch minimum.

Pointer deflection: 90 degrees nominal.

Position influence: ± 3 percent maximum change for 60 degrees rotation from normal operating position.

Accuracy: ± 3 percent.

Overshoot: 50 percent maximum.

Response time: 2 seconds maximum.

Power consumption (loss) (at end scale deflection): 1 mA ± 5 percent.

High temperature cycling:

± 5 percent.
± 3 percent permanent change.

Temperature influence: ± 0.75 percent change.

Exposure to extreme temperatures:

± 3 percent permanent change.

Overload capacity:

Sustained overload:

± 1 percent temporary zero shift.
± 1 percent permanent zero shift.
± 2 percent permanent change.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:51Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage: 1,500 volts rms.

TABLE I. Full-scale ranges.

| Millivolts | Volts | |
|---|---|---|
| Zero left | Zero left | Zero center |
| 30 | 2 | 30-0-30 |
| 50 | 10 | 50-0-50 |
| 100 | 20 | 100-0-100 |
| 200 | 30 | |
| 300 | 50 | |
| 500 | 100 | |
| | 200 | |
| | 300 | |

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents: This document references MIL-PRF-10304.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - SH
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 6625-2006-016)

Review activities:
Army - AR, AT, AV, CR4, MI
Navy – MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:51Z
Check the source to verify that this is the current version before use.