PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: VOLTMETER AND AMMETER, DC, LONG SCALE (FLUSH MOUNTING, ROUND FLANGE, 3½ INCH), STYLE 34

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the meters described herein shall consist of this specification and MIL-PRF-10304.

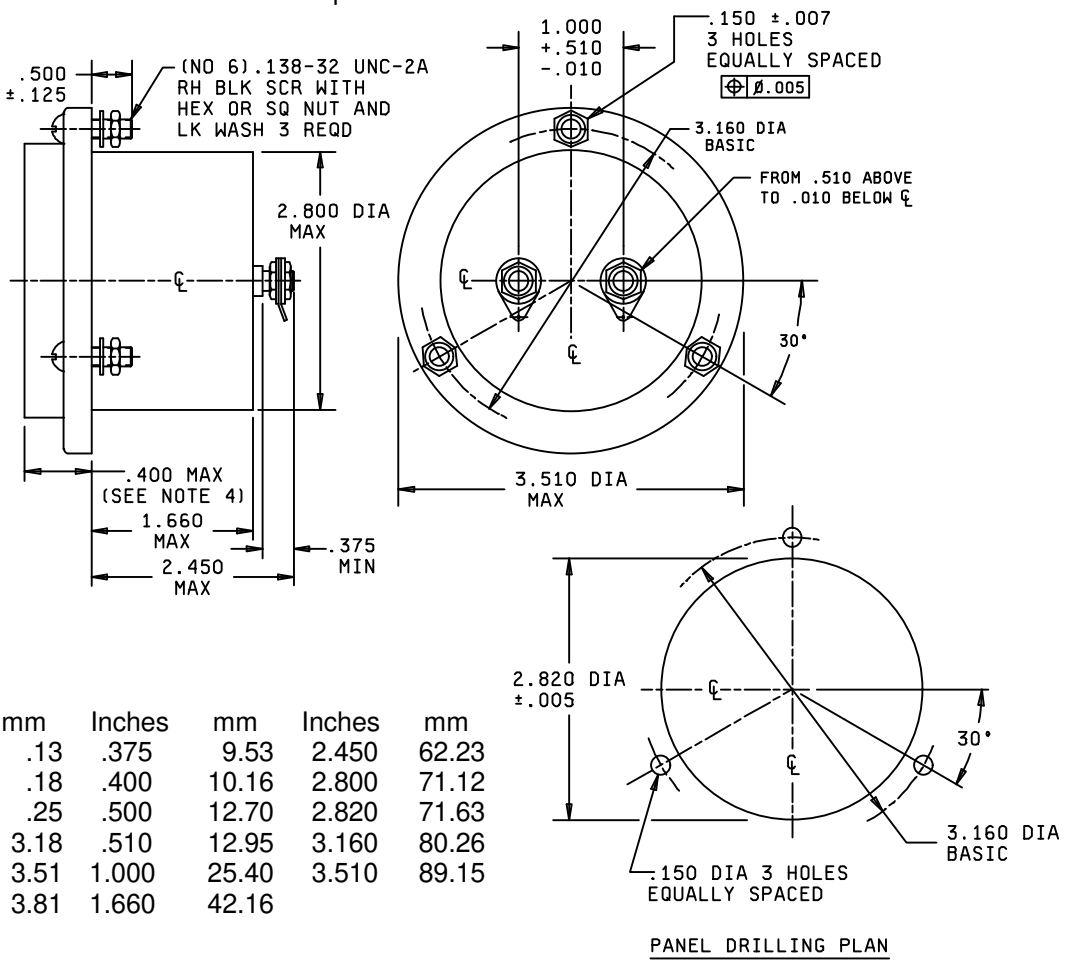

PANEL DRILLING PLAN

Inches	mm	Inches	mm	Inches	mm
.005	.13	.375	9.53	2.450	62.23
.007	.18	.400	10.16	2.800	71.12
.010	.25	.500	12.70	2.820	71.63
.125	3.18	.510	12.95	3.160	80.26
.138	3.51	1.000	25.40	3.510	89.15
.150	3.81	1.660	42.16		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance is ± 1/2° on angles.
4. Maximum projection from front of panel including mounting gaskets (if used).

FIGURE 1. Meter, panel type.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:
(Readings expressed as a percent of full-scale value.)

Dimensions and configuration: See figure 1.

Full-scale ranges: See table I.

Scale:
Length: 5 inches minimum.
Pointer deflection: 250° nominal.

Position influence: ±1 percent change for 60° rotation from normal operating position.

Accuracy: ±1 percent.

Overshoot: 50 percent maximum.

Response time: 3 seconds maximum.

Power consumption (loss) (at end scale deflection):
Milliammeters 0-1 mA - 700 mV maximum.
Milliammeters above 1 mA - 150 mV maximum.
Voltmeter - 1 mA nominal.

High temperature cycling:
±4.0 percent.
±0.5 percent change.

Temperature influence: ±1 percent change.

Exposure to extreme temperatures: ±3 percent permanent change.

Overload capacity:
Momentary overload: ±2 percent permanent change.
Sustained overload:
±1 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage: 3, 000 volts rms.

TABLE I. Full-scale ranges.

Voltmeters		Ammeters			
Volts		Microamperes		Milliamperes	
Zero left	Zero center	Zero left	Zero center	Zero left	Zero center
1	1-0-1	50	50-0-50	1	1-0-1
2	10-0-10	100	100-0-100	5	5-0-5
10	30-0-30	200	200-0-200	10	10-0-10
20	50-0-50	500	500-0-500	30	
30	100-0-100			50	
50	200-0-200				
100					
200					
300					
500					

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:51Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Air Force - 11
Army - AR, AT, AV, CR4
Navy - EC, MC

Preparing activity:
DLA - CC

(Project 6625-0875)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:51Z
Check the source to verify that this is the current version before use.