
MILITARY SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: AMMETER, DC (SQUARE FLANGE, 1-1/2 INCH), STYLE 13

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the meters described herein shall consist of this document and the latest issue of Specification MIL-M-10304

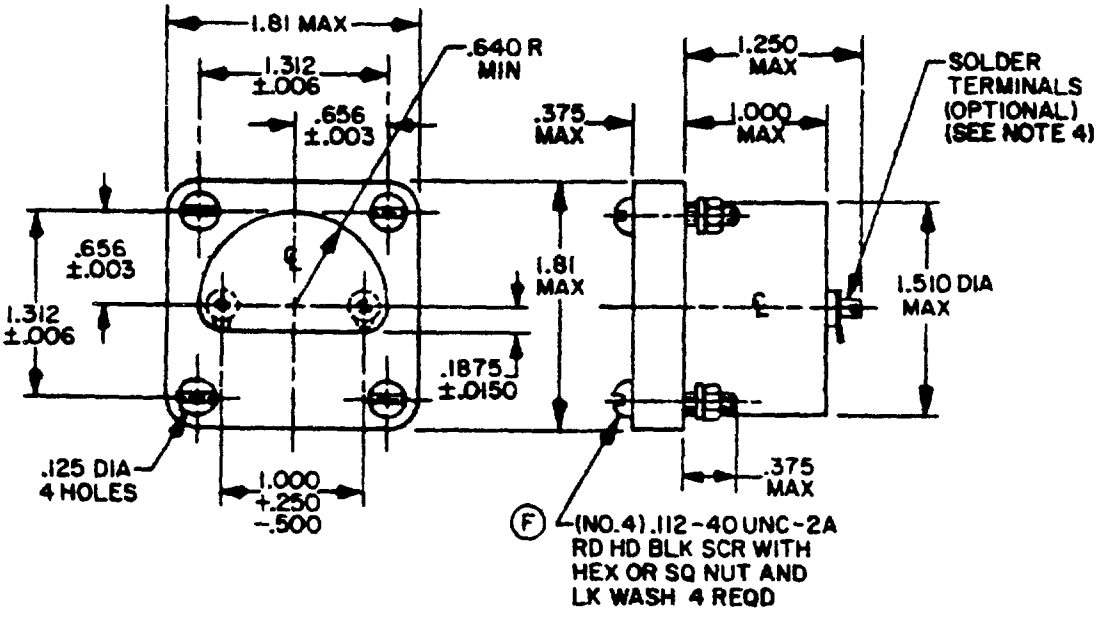

INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.1875	4 76	656	16.66
.006	.15	.250	6 35	1 000	25 40
0150	38	.375	9 53	1.250	31 75
112	2 84	.500	12 70	1.312	33 32
125	3.18	640	16 26	1 510	38 35
				1.81	45 97

NOTES.
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ± 005 (13 mm)
4. The center line of the terminals may be located .188 (4.78 mm) above or below the center line of the meter.
5. Letters and numerals for scale numerals and captions shall be .085 (2 16 mm) max and all others shall be .050 (1.27 mm) max.

(F) denotes changes

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure

Weight 4 ounces maximum

Full-scale ranges See table I

Scale
Length 1.0 inch minimum.
Pointer deflection 90° nominal.

Position influence· ±3 percent change for 60° rotation from normal operating position.

Overshoot 2 0 minimum.

(F) Overshoot 50 percent maximum

Response time: 2 seconds maximum

Power consumption (loss) (at end scale deflection):
250 mV maximum for μA.
150 mV maximum for mA and self-contained ammeters.
50 mV ±3 percent for external shunt ammeters with shunt leads of 0.065±0.010 ohm resistance

High temperature cycling.
±5 percent.
.3 percent permanent change.

Temperature influence. ±1 percent change.

Exposure to extreme temperatures·
±3 percent permanent change

Overload capacity
Momentary overload· ±2 percent permanent change
Sustained overload:
±1 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage· 1,500 volts rms

Vibration, random drop, and shock Repeatability is not applicable for those microammeters below 100 microamperes

TABLE I. Full-scale ranges.

Microamperes		Milliamperes	
Zero left	Zero center	Zero left	Zero center
10	10-0-10	1	1-0-1
30	30-0-30	5	5-0-5
50	50-0-50	10	10-0-10
100	100-0-100	50	100-0-100
200	200-0-200	100	500-0-500
300	300-0-300	200	
500	500-0-500	500	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:52Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 82

Review activities
Army - EL, AV, AT, ME, WC
Navy - EC, MC
Air Force - 11
DSA - ES

User activities:
Army - MI
Navy - CG
Air Force - None

Preparing activity.
Army - EL

Agent
DSA - ES

(Project 6625-0574-19)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:52Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION MIL-M-10304/24F METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: AMMETER, DC(SQUARE FLANGE, 1⅝ INCH), STYLE 13

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-FM 1068-68

To detach this for along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:52Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: [redacted]- DRSEL-RD-TS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:52Z
Check the source to verify that this is the current version before use.