
MILITARY SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED RECTIFIER-TYPE VOLTMETER, AC (FLUSH MOUNTING, ROUND FLANGE, 2-1/2 INCH) STYLE 26

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the meters described herein shall consist of this document and the latest issue of Specification MIL-M-10304

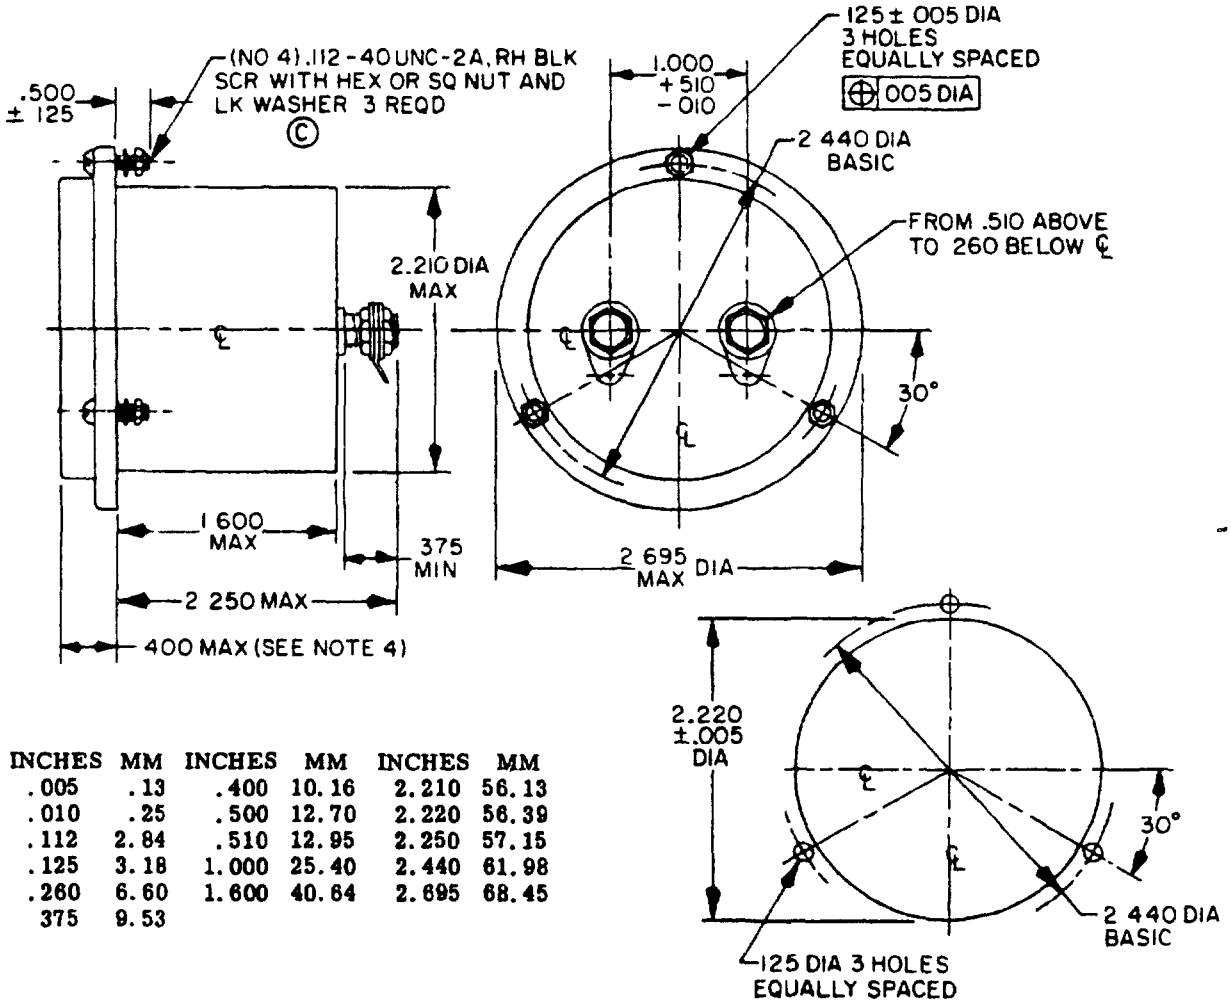

PANEL DRILLING PLAN

INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.400	10.16	2.210	56.13
.010	.25	.500	12.70	2.220	56.39
.112	2.84	.510	12.95	2.250	57.15
.125	3.18	1.000	25.40	2.440	61.98
.260	6.60	1.600	40.64	2.695	68.45
375	9.53				

NOTES:
1. Dimensions are in inches
2. Metric equivalents (to the nearest 01 mm) are given for general information only and are based upon 1 inch = 25 4 mm
3. Tolerance is ±1/2° on angles.
4. Maximum projection from front of panel including mounting gaskets (if used).

© denotes changes

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure.

Full-scale ranges· See table I.

Scale
Length 1.5 inches minimum
Pointer deflection 90° nominal.

Position influence ±2 percent change for 60° rotation from normal operating position.

Accuracy: ±3 percent.

© Overshoot 40 percent maximum

Response time 2 seconds maximum.

Power consumption (loss) (at end scale deflection):
Self-contained instruments 1.1 mA maximum.
External resistors. 1.0 mA ±3 percent.
Terminal voltage drop· 2 volts ±3 percent (external resistor ranges).
Frequency range (±2% change): at 50/60, 500, and 1,000 Hz.

High temperature cycling·
Above 5 volts: ±5 percent.
5 volts and below ±10 percent.
Permanent change. ±2 percent.

Temperature influence:
Above 5 volts: ±3 percent.
5 volts and below: ±4 percent.

Exposure to extreme temperature·

Permanent change. ±2 percent.

Overload capacity:
Sustained overload:
±1 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage: 3,000 volts rms.

TABLE I. Full-scale ranges.

Volts		Kilovolts 1/	
2	100	1	10
5	200	2	20
10	300	5	30
20	1/ 500		
30			
50			

1/ Used with external resistor. These meters shall have a full-scale deflection of 1 milliampere.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:52Z
Check the source to verify that this is the current version before use.

Custodians.
Army - EL
Navy - EC
Air Force - 82

Review activities:
Army - EL, AV, AT, ME, WC
Navy - EC, MC
Air Force - 11
DSA - ES

User activities:
Army - MI
Navy - CG
Air Force - None

Preparing activity.
Army - EL

Agent
DSA - ES

(Project 6625-0574-20)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:52Z
Check the source to verify that this is the current version before use.

To detach this cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION MIL-M-10304/25C METERS,ELECTRICAL INDICATING,PANEL TYPE, RUGGEDIZED: RECTIFIER-TYPE VOLTMETER,AC(FLUSH MOUNTING,ROUND FLANGE,2 3/8

ORGANIZATION IN(H) STYLE 26

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:52Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: [redacted]X DRSEL-RD-TS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

5902

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:52Z
Check the source to verify that this is the current version before use.