PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: RECTIFIER-TYPE VOLTMETER, AC (FLUSH MOUNTING, ROUND FLANGE, 2½ INCH), STYLE 26

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the meters described herein shall consist of this specification and MIL-PRF-10304.

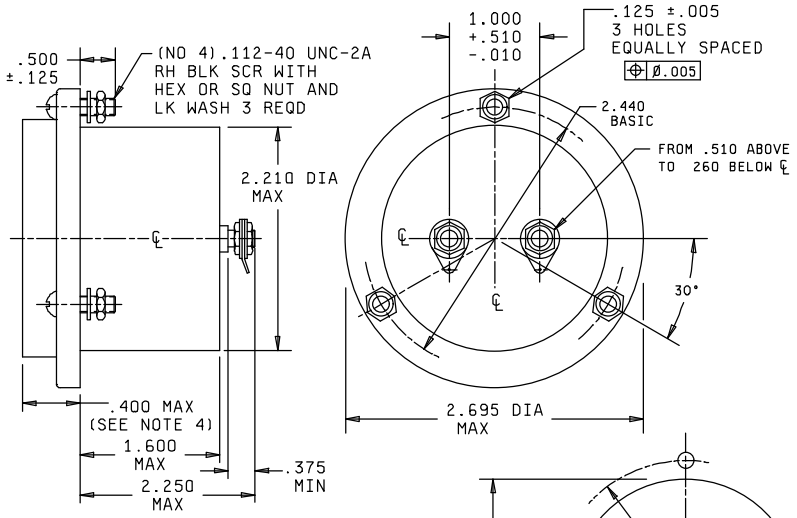

Inches	mm	Inches	mm	Inches	mm
.005	.13	.400	10.16	2.210	56.13
.010	.25	.500	12.70	2.220	56.39
.112	2.84	.510	12.95	2.250	57.15
.125	3.18	1.000	25.40	2.440	61.98
.260	6.60	1.600	40.64	2.695	68.45
.375	9.53				

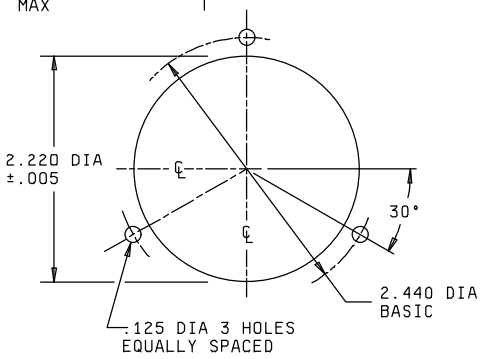

PANEL DRILLING PLAN

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance is ± ½° on angles.
4. Maximum projection from front of panel including mounting gaskets (if used).

FIGURE 1. Meter, panel type.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Full-scale ranges: See table I.

Scale:
Length: 1.5 inch minimum.
Pointer deflection: 90° nominal.

Position influence: ±2 percent change for 60° rotation from normal operating position.

Overshoot: 40 percent maximum.

Response time: 2 seconds maximum.

Power consumption (loss) (at end scale deflection):
Self-contained instruments: 1.1 mA maximum.
External resistors: 1.0 mA ±3 percent.
Terminal voltage drop: 2 volts ±3 percent (external resistor ranges).
Frequency range (±2 % change): at 50/60, 500, and 1,000 Hz.

High temperature cycling:
Above 5 volts: ±5 percent.
5 volts and below: ±10 percent.
Permanent change: ±2 percent.

Temperature influence:
Above 5 volts: ±3 percent.
5 volts and below: ±4 percent.

Exposure to extreme temperatures: ±2 percent

Overload capacity:
Sustained overload:
±1 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage: 3, 000 volts rms.

TABLE I. Full-scale ranges.

Volts		Kilovolts 1/	
2	100	1	10
5	200	2	20
10	300	5	50
20	1/ 500		
30			
50			

1/ Used with external resistor. These meters shall have a full-scale-deflection of 1 milliampere.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:52Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Air Force - 11
Army - AR, AT, AV, CR4
Navy - MC

Preparing activity:
DLA - CC

(Project 6625-0878)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:52Z
Check the source to verify that this is the current version before use.