

MILITARY SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED RECTIFIER-TYPE VOLTMETER, AC (FLUSH MOUNTING, ROUND FLANGE, 3-1/2 INCH), STYLES 34 AND 36

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the meters described herein shall consist of this document and the latest issue of Specification MIL-M-10304.

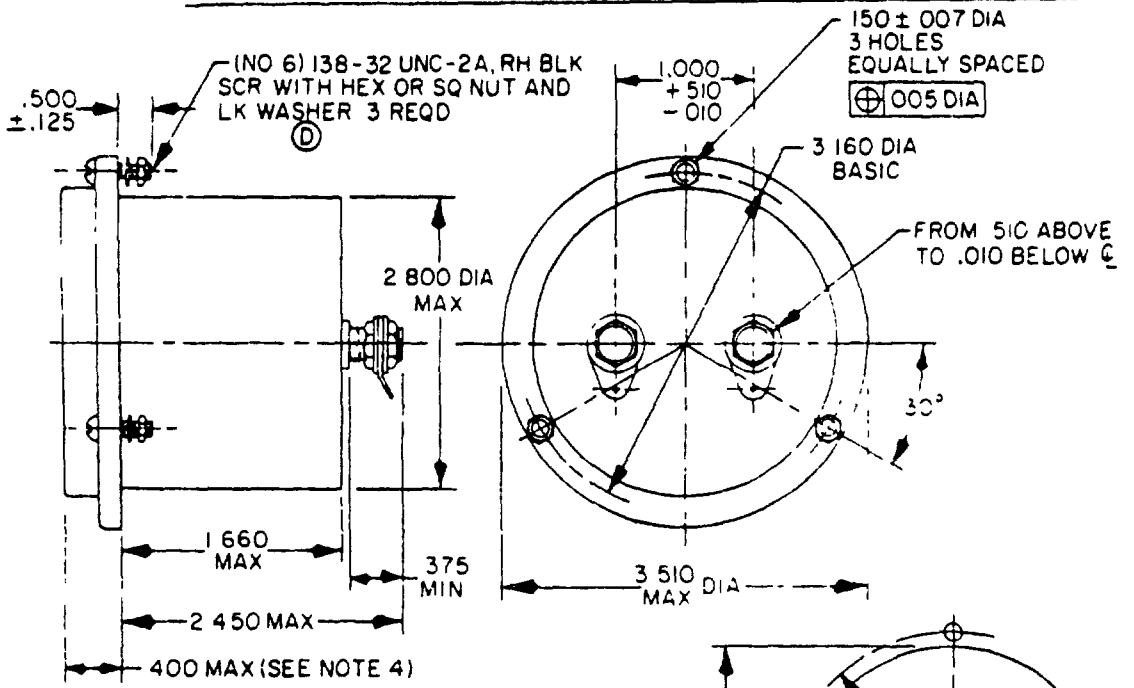

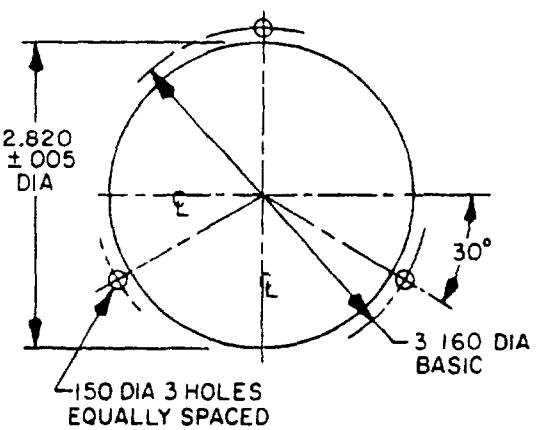

PANEL DRILLING PLAN

INCHES	MM	INCHES	MM	INCHES	MM
005	13	375	9.53	2.450	62 23
007	.18	400	10 16	2.800	71 12
010	25	.500	12.70	2.820	71.63
.125	3.18	.510	12.95	3.160	80 26
.138	3.51	1.000	25.40	3.510	89.15
.150	3.81	1.660	42.16		

NOTES

1. Dimensions are in inches.
2. Metric equivalents (to the nearest 01 mm) are given for general information only and are based upon 1 inch = 25.4 mm
3. Tolerance is ±1/2° on angles.
4. Maximum projection from front of panel including mounting gaskets (if used)

Ⓓ denotes changes

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration See figure

Weight 16 ounces maximum.

Full-scale ranges See table I

Scale:
Length 5 inches minimum (style 34), 2 inches minimum (style 36).
Pointer deflection 250° minimum (style 34), 90° nominal (style 36)

Position influence ±1 percent change for 60° rotation from normal operating position (style 34), ±2 percent change for 60° rotation from normal operating position (style 36).

Accuracy: ±2 percent (style 34), ±3 percent (style 36).

Ⓓ Overshoot: 40 percent maximum.

Response time 3 seconds maximum (style 34), 2 seconds maximum (style 36).

Power consumption (loss) (at end scale deflection)
Self-contained instruments: 1.1 mA maximum.
External resistors: 1.0 mA ±3 percent
Terminal voltage drop 2 volts ±3 percent (external resistor ranges).
Frequency range (±2% change) at 50/60, 500, and 1,000 Hz

High temperature cycling.
Above 5 volts: ±5 percent.
5 volts and below. ±10 percent.
Permanent change: ±2 percent.

Temperature influence:
Above 5 volts: ±3 percent.
5 volts and below: ±4 percent.

Exposure to extreme temperatures:
Permanent change: ±3 percent (style 34), ±2 percent (style 36).

Overload capacity
Momentary overload: ±2 percent permanent change (style 34).
Sustained overload:
±1 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage 3,000 volts rms.

TABLE I. Full-scale ranges.

Volts		Kilovolts 1/	
2	100	1	10
5	200	2	20
10	300	5	30
20	1/ 500		
30			
50			

1/ Used with external resistor. These meters shall have a full-scale deflection of 1 mA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 82

Review activities:
Army - EL, AV, AT, ME, WC
Navy - EC, MC
Air Force - 11
DSA - ES

User activities:
Army - MI
Navy - CG
Air Force - None

Preparing activity:
Army - EL

Agent
DSA - ES

(Project 6625-0574-21)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.

STRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in mitting comments and suggestions for improvements All users of military standardization documents are invited to provide gestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and iled In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the oblems Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an nowledgement will be mailed to you within 30 days to let you know that your comments were received and are being nsidered

OTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of cification requirements on current contracts Comments submitted on this form do not constitute or imply authorization waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

PARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

FICIAL BUSINESS
NALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Avionics Research and Development Activity
ATTN: DAVAA-S/PE
Fort Monmouth, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b Recommended Wording.

c Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil - Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.