PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: RECTIFIER-TYPE VOLTMETER, AC (FLUSH MOUNTING, ROUND FLANGE, 3½ INCH), STYLES 34 AND 36

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the meters described herein shall consist of this specification and MIL-PRF-10304.

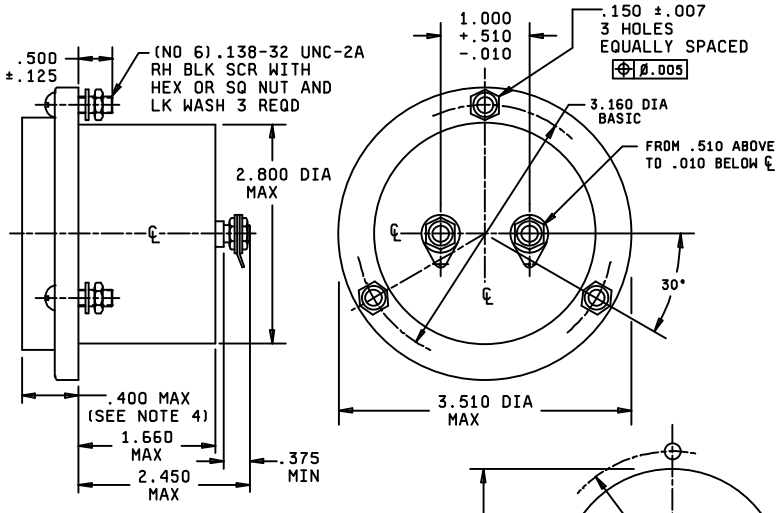

Inches	mm	Inches	mm	Inches	mm
.005	.13	.375	9.53	2.450	62.23
.007	.18	.400	10.16	2.800	71.12
.010	.25	.500	12.70	2.820	71.63
.125	3.18	.510	12.95	3.160	80.26
.138	3.51	1.000	25.40	3.510	89.15
.150	3.81	1.600	40.64		

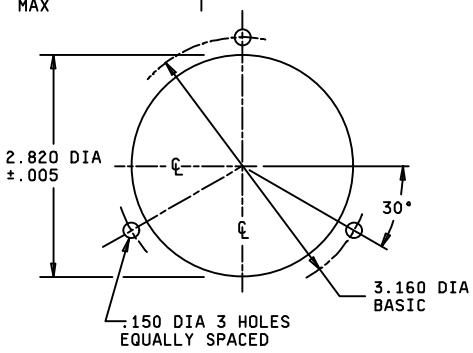

PANEL DRILLING PLAN

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance is ± ½° on angles.
4. Maximum projection from front of panel including mounting gaskets (if used).

FIGURE 1. Meter, panel type.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Weight: 16 ounces maximum.

Full-scale ranges: See table I.

Scale:
Length: 5 inched minimum (style 34); ±3 percent (style 36).
Pointer deflection: 250° minimum (style 34); 90° nominal (style 36).

Position influence: ±1 percent change for 60° rotation from normal operating position (style 34); ±2 percent change for 60° rotation from normal operating position (style 36).

Accuracy: ±2 percent (style 34); ±3 percent (style 36).

Overshoot: 40 percent maximum.

Response time: 3 seconds maximum (style 34; 2 seconds maximum (style 36).

Power consumption (loss) (at end scale deflection):
Self-contained instruments: 1.1 mA maximum.
External resistors: 1.0 mA ±3 percent.
Terminal voltage drop: 2 volts ±3 percent (external resistor ranges).
Frequency range (±2 % change): at 50/60, 500, and 1,000 Hz.

High temperature cycling:
Above 5 volts: ±5 percent.
5 volts and below: ±10 percent.
Permanent change: ±2 percent.

Temperature influence:
Above 5 volts: ±3 percent.
5 volts and below: ±4 percent.

Exposure to extreme temperatures: ±2 percent.

Overload capacity:
Sustained overload:
±1 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage: 3, 000 volts rms.

TABLE I. Full-scale ranges.

Volts		Kilovolts 1/	
2	100	1	10
5	200	2	20
10	300	5	50
20	1/ 500		
30			
50			

1/ Used with external resistor. These meters shall have a full-scale-deflection of 1 milliampere.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Air Force - 11
Army - AR, AT, AV
Navy - MC

Preparing activity:
DLA - CC

(Project 6625-0879)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.