
MIL-M-10304/29
24 May 1974
SUPERSEDING
MIL-M-17275/1
14 April 1969


MILITARY SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED MILLIVOLTMETER, DC (FLUSH MOUNTING, ROUND FLANGE, 1 INCH), STYLES 05, 06, AND 07

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the meters described herein shall consist of this document and the latest issue of Specification MIL-M-10304.

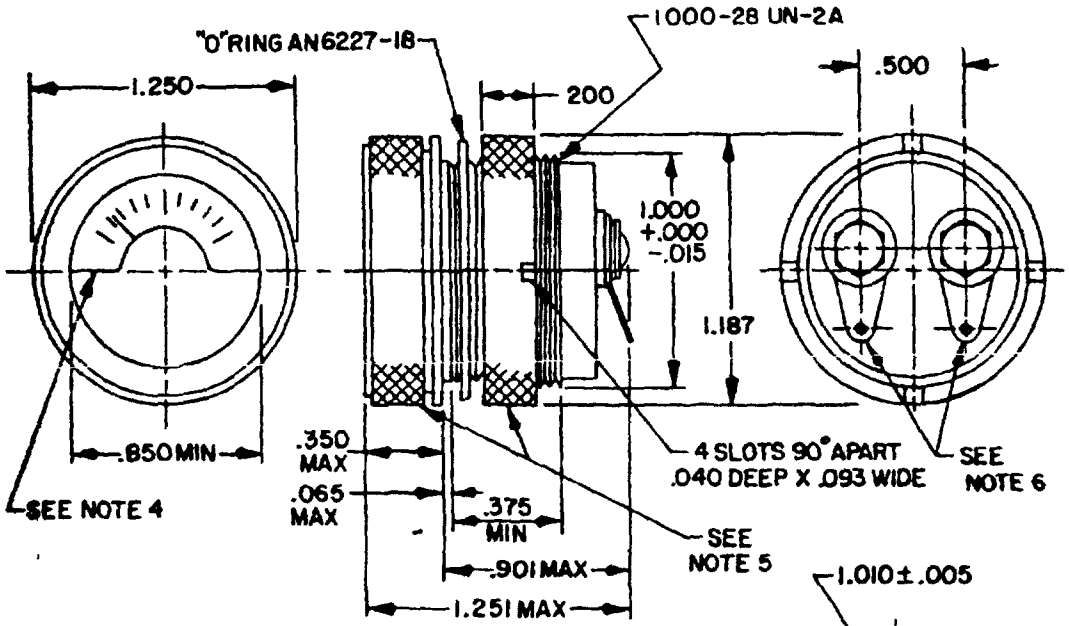




DIAL



SHROUD

MARKING ILLUSTRATION



PANEL DRILLING PLAN

INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.350	8.89	1.010	25.65
.015	38	.375	9.53	1 187	30.15
.040	1.02	.500	12.70	1.250	31.75
.065	1.65	850	21.59	1.251	31.78
.093	2.36	.901	22.89		
.200	5.08	1.000	25 40		

NOTES:
1. Dimensions are in inches
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.015 (.38 mm)
4. Shroud design is optional.
5. Knurled edge required for mounting, optional for front flange
6. The solder lug terminals shall accommodate wire of a diameter of .065 (1 65 mm) and may accommodate up to a maximum diameter of .105 (2.67 mm).

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration See figure

Weight 4 ounces maximum.

Case material Metal or molded thermosetting plastic.

Full-scale ranges See table I

Scale:
Pointer deflections: 90° minimum.
Length .75 inch minimum.

Power consumption: 6 milliamperes maximum.

Position influence ±3 percent.

Accuracy: ±3 percent.

Overshoot 2 0 minimum.

Response time: 3.0 seconds.

High temperature cycling:
±20 percent.
±4 percent permanent change.

Temperature influence: ±5 percent.

Exposure to extreme temperatures:
±3 percent, permanent change.

Overload capacity:
Momentary overload: ±2 percent.
Sustained overload:
±2 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage: 1,000 rms.

TABLE I. Full-scale ranges.

Voltmeter	
Millivolts	
Zero left	Zero center
50	25-0-25
100	50-0-50
500	250-0-250

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession data.

Superseded type designation	New type designation
Style 04	Style 07
MR04W050DCMV	MR07W050DCMVR
MR04B050DCMV	MR07B050DCMVR
MR04F050DCMV	MR07F050DCMVR
MR04S050DCMV 1/	MR07P050DCMVR
Style 05	Style 05
MR05W050DCMV	MR05W050DCMVR
MR05B050DCMV	MR05B050DCMVR
MR05F050DCMV	MR05F050DCMVR
MR05S050DCMV 1/	MR05P050DCMVR
Style 06	Style 06
MR06W050DCMV	MR06W050DCMVR
MR06B050DCMV	MR06B050DCMVR
MR06F050DCMV	MR06F050DCMVR
MR06S050DCMV 1/	MR06P050DCMVR

1/ The color scheme code letter "S" has been superseded by the code letter "P". The type designations of all new units will carry the code letter "P" (when applicable) to indicate that nonradioactive material has been used for phosphorescent markings and pointer.

Custodians:
Army - EL
Navy - EC
Air Force - 82

Review activities:
Army - EL, ME, AT, AV
Navy - EC, MC
Air Force - 11
DSA - ES

User activities:
Army - MI
Navy - CG
Air Force - None

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 6625-0543)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL-RD-ZS
Fort Monmouth, New Jersey 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-M-10304/29 METERS,ELECTRICAL INDICATING,PANEL TYPE, RUGGEDIZED: MILLIVOLTMETER,DC(FLUSH MOUNTING,ROUND FLANGE,1 INCH), STYLES 05,06 AND 07

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 68 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.