PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: MULTIVOLTMETER, DC (FLUSH MOUNTING, ROUND FLANGE, 1 INCH), STYLES 05, 06, AND 07

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the meters described herein shall consist of this specification and MIL-PRF-10304.

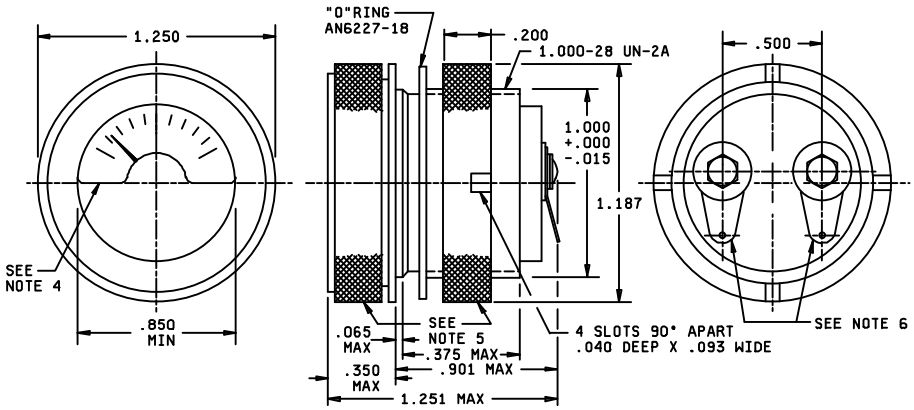

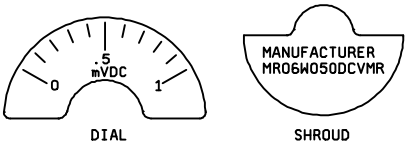

MARKING ILLUSTRATION



PANEL DRILLING PLAN

Inches	mm	Inches	mm	Inches	mm
.005	.13	.350	8.89	1.010	25.65
.015	.38	.375	9.53	1.187	30.15
.040	1.02	.500	12.70	1.250	31.75
.065	1.65	.850	21.59	1.251	31.78
.093	2.36	.901	22.89		
.200	5.08	1.000	25.40		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .015 (.38 mm).
4. Shroud design is optional.
5. Knurled edge required for mounting; optional for front flange.
6. The solder lug terminals shall accommodate wire of a diameter of .065 (1.65 mm) and may accommodate up to a maximum diameter of .105 (2.67 mm).

FIGURE 1. Meter, panel type.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Weight: 4 ounces maximum.

Case material: Metal or molded thermosetting plastic.

Full-scale ranges: See table I.

Scale:
Pointer deflection: 90° minimum.
Length: .75 inch minimum.

Power consumption: 6 milliamperes maximum.

Position influence: ±3 percent.

Accuracy: ±3 percent.

Overshoot: 2.0 minimum.

Response time: 3 seconds.

High temperature cycling:
20 percent.
±4 percent permanent change.

Temperature influence: ±5 percent.

Exposure to extreme temperatures: ±2 percent.

Overload capacity:
Momentary overload: ±2 percent.
Sustained overload:
±1 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage: 1, 000 volts rms.

Supersession data: See table II.

TABLE I. Full-scale ranges.

Voltmeter	
Millivolts	
Zero left	Zero Center
50 100 500	25-0-25 50-0-50 250-0-250

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession data.

Superseded type designation	New type designation
Style 04	Style 07
MR04W050DCMV	MR07W050DCMVR
MR04B050DCMV	MR07B050DCMVR
MR04F050DCMV	MR07F050DCMVR
MR04S050DCMV 1/	MR07P050DCMVR
Style 05	Style 05
MR05W050DCMV	MR05W050DCMVR
MR05B050DCMV	MR05B050DCMVR
MR05F050DCMV	MR05F050DCMVR
MR05S050DCMV 1/	MR05P050DCMVR
Style 06	Style 06
MR06W050DCMV	MR06W050DCMVR
MR06B050DCMV	MR06B050DCMVR
MR06F050DCMV	MR06F050DCMVR
MR06S050DCMV 1/	MR06P050DCMVR

1/ The color scheme code letter "S" has been superseded by the code letter "P". The type designations of all new units will carry the code letter "P" (when applicable) to indicate that non-radioactive material has been used for phosphorescent markings and pointer.

Custodians:
Army - CR
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Air Force - 11
Army - AR, AT, AV, CR4
Navy - MC

Preparing activity:
DLA - CC

(Project 6625-0880)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.