PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: MILLIAMMETER, DC (FLUSH MOUNTING, ROUND FLANGE, 1 INCH), STYLES 05, 06, AND 07

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the meters described herein shall consist of this specification and MIL-PRF-10304.

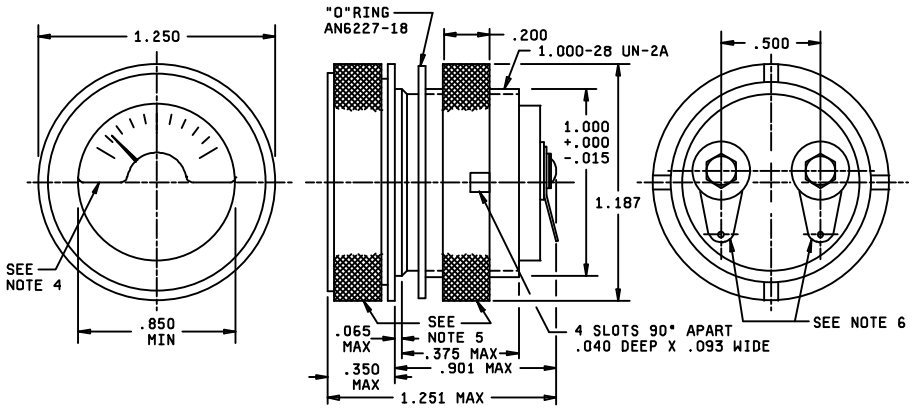

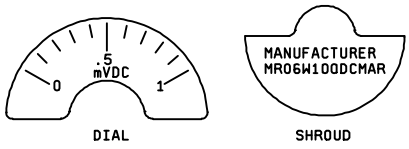

MARKING ILLUSTRATION



PANEL DRILLING PLAN

Inches	mm	Inches	mm	Inches	mm
.005	.13	.350	8.89	1.010	25.65
.015	.38	.375	9.53	1.187	30.15
.040	1.02	.500	12.70	1.250	31.75
.065	1.65	.850	21.59	1.251	31.78
.093	2.36	.901	22.89		
.200	5.08	1.000	25.40		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .015 (.38 mm).
4. Shroud design is optional.
5. Knurled edge required for mounting; optional for front flange.
6. The solder lug terminals shall accommodate wire of a diameter of .065 (1.65 mm) and may accommodate up to a maximum diameter of .105 (2.67 mm).

FIGURE 1. Meter, panel type.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Weight: 4 ounces maximum.

Case material: Metal or molded thermosetting plastic.

Full-scale ranges: See table I.

Scale:
Pointer deflection: 90° minimum.
Length: .75 inch minimum.

Power consumption: 100 milliamperes maximum.

Position influence: ±3 percent.

Accuracy: ±3 percent.

Overshoot: 2.0 minimum.

Response time: 2.0 seconds.

High temperature cycling:
±4 percent.
±4 percent permanent change.

Temperature influence: ±1 percent.

Exposure to extreme temperatures:
±8 percent.
±3 percent permanent change.

Overload capacity:
Momentary overload: ±2 percent.
Sustained overload:
±2 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage: 1, 000 volts rms.

Supersession data: See table II.

TABLE I. Full-scale ranges.

Ammeters	
Milliamperes	
Zero left	Zero Center
50 100 500	25-0-25 50-0-50 250-0-250

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession data.

Superseded type designation	New type designation
Style 04	Style 07
MR04W001DCMA	MR07W001DCMAR
MR04B001DCMA	MR07B001DCMAR
MR04F001DCMA	MR07F001DCMAR
MR04S001DCMA 1/	MR07P001DCMAR
Style 05	Style 05
MR05W001DCMA	MR05W001DCMAR
MR05B001DCMA	MR05B001DCMAR
MR05F001DCMA	MR05F001DCMAR
MR05S001DCMA 1/	MR05P001DCMAR
Style 06	Style 06
MR06W001DCMA	MR06W001DCMAR
MR06B001DCMA	MR06B001DCMAR
MR06F001DCMA	MR06F001DCMAR
MR06S001DCMA 1/	MR06P001DCMAR

1/ The color scheme code letter "S" has been superseded by the code letter "P". The type designations of all new units will carry the code letter "P" (when applicable) to indicate that non-radioactive material has been used for phosphorescent markings and pointer.

Custodians:
Army - CR
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Air Force - 11
Army - AT, AV, CR4
Navy - MC

Preparing activity:
DLA - CC

(Project 6625-0881)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:53Z
Check the source to verify that this is the current version before use.