PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: MICROAMMETER, DC (FLUSH MOUNTING, ROUND FLANGE, 1 INCH), STYLES 05, 06, AND 07

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the meters described herein shall consist of this specification and MIL-PRF-10304.

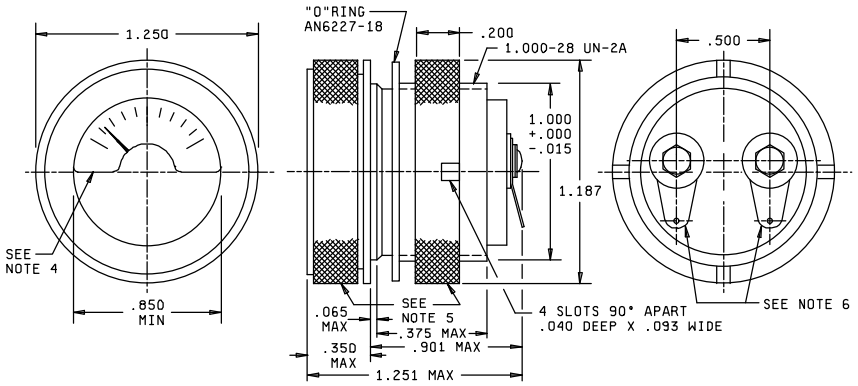

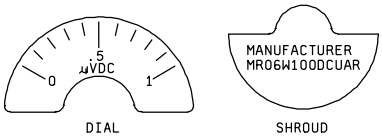

MARKING ILLUSTRATION



PANEL DRILLING PLAN

Inches	mm	Inches	mm	Inches	mm
.005	.13	.350	8.89	1.010	25.65
.015	.38	.375	9.53	1.187	30.15
.040	1.02	.500	12.70	1.250	31.75
.065	1.65	.850	21.59	1.251	31.78
.093	2.36	.901	22.89		
.200	5.08	1.000	25.40		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .015 (.38 mm).
4. Shroud design is optional.
5. Knurled edge required for mounting; optional for front flange.
6. The solder lug terminals shall accommodate wire of a diameter of .065 (1.65 mm) and may accommodate up to a maximum diameter of .105 (2.67 mm).

FIGURE 1. Meter, panel type.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Weight: 4 ounces maximum.

Case material: Metal or molded thermosetting plastic.

Full-scale ranges: See table I.

Scale:
Pointer deflection: 90° minimum.
Length: .75 inch minimum.

Power consumption: 200 millivolts maximum.

Position influence: ±3 percent.

Accuracy: ±3 percent.

Overshoot: 2.0 minimum.

Response time: 3 seconds.

High temperature cycling:
±4 percent.
±4 percent permanent change.

Temperature influence: ±1 percent.

Exposure to extreme temperatures:
±8 percent.
±3 percent permanent change.

Overload capacity:
Momentary overload: ±2 percent.
Sustained overload:
±2 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage: 1, 000 volts rms.

Supersession data: See table II.

TABLE I. Full-scale ranges.

Voltmeter	
Millivolts	
Zero left	Zero Center
100 200 500	50-0-50 100-0-100 500-0-500

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession data.

Superseded type designation	New type designation
Style 04	Style 07
MR04W500DCUA	MR07W500DCUAR
MR04W5H5DCUA	MR07W5H5DCUAR
MR04W100DCUA	MR07W100DCUAR
MR04B500DCUA	MR07B500DCUAR
MR04B5H5DCUA	MR07B5H5DCUAR
MR04B100DCUA	MR07B100DCUAR
MR04F500DCUA	MR07F500DCUAR
MR04F5H5DCUA	MR07F5H5DCUAR
MR04F100DCUA	MR07F100DCUAR
MR04S500DCUA 1/	MR07P500DCUAR
MR04S5H5DCUA 1/	MR07P5H5DCUAR
MR04S100DCUA 1/	MR07P100DCUAR
Style 05	Style 05
MR05W500DCUA	MR05W500DCUAR
MR05W5H5DCUA	MR05W5H5DCUAR
MR05W100DCUA	MR05W100DCUAR
MR05B500DCUA	MR05B500DCUAR
MR05B5H5DCUA	MR05B5H5DCUAR
MR05B100DCUA	MR05B100DCUAR
MR05F500DCUA	MR05F500DCUAR
MR05F5H5DCUA	MR05F5H5DCUAR
MR05F100DCUA	MR05F100DCUAR
MR05S500DCUA 1/	MR05P500DCUAR
MR05S5H5DCUA 1/	MR05P5H5DCUAR
MR05S100DCUA 1/	MR05P100DCUAR
Style 06	Style 06
MR06W500DCUA	MR06W500DCUAR
MR06W5H5DCUA	MR06W5H5DCUAR
MR06W100DCUA	MR06W100DCUAR
MR06B500DCUA	MR06B500DCUAR
MR06B5H5DCUA	MR06B5H5DCUAR
MR06B100DCUA	MR06B100DCUAR
MR06F500DCUA	MR06F500DCUAR
MR06F5H5DCUA	MR06F5H5DCUAR
MR06F100DCUA	MR06F100DCUAR
MR06S500DCUA 1/	MR06P500DCUAR
MR06S5H5DCUA 1/	MR06P5H5DCUAR
MR06S100DCUA 1/	MR06P100DCUAR

1/ The color scheme code letter "S" has been superseded by the code letter "P". The type designations of all new units will carry the code letter "P" (when applicable) to indicate that non-radioactive material has been used for phosphorescent markings and pointer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Air Force - 11
Army - AT, AV, CR4
Navy - MC

Preparing activity:
DLA - CC

(Project 6625-0882)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.