INCH-POUND


MIL-PRF-10304/31A
w/AMENDMENT 1
18 January 2008
SUPERSEDING
MIL-PRF-10304/31A
26 April 1999


PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED:
MICROAMMETER, DC (FLUSH MOUNTING, ROUND FLANGE, 1 INCH),
STYLES 05, 06, AND 07

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification sheet and MIL-PRF-10304.

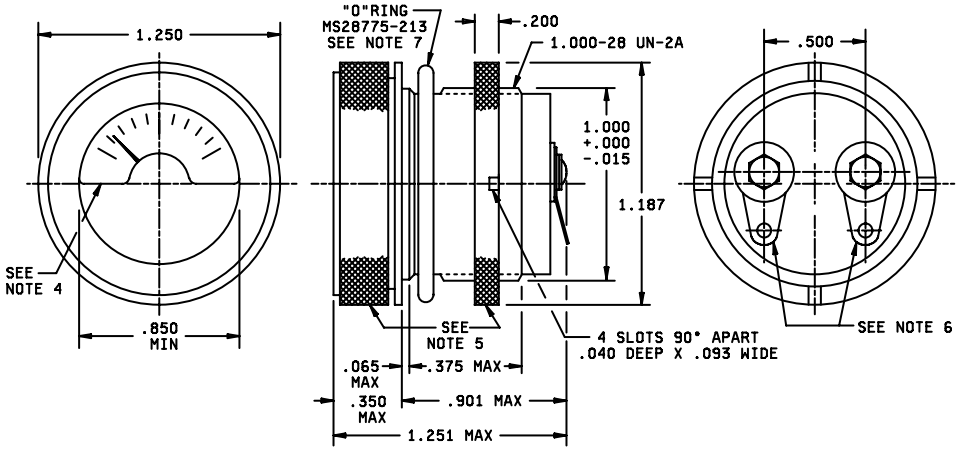

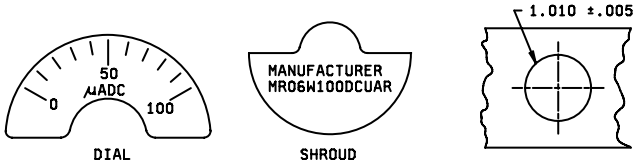

MARKING ILLUSTRATION PANEL DRILLING PLAN

Inches	mm	Inches	mm	Inches	mm
.005	.13	.350	8.89	1.010	25.65
.015	.38	.375	9.53	1.187	30.15
.040	1.02	.500	12.70	1.250	31.75
.065	1.65	.850	21.59	1.251	31.78
.093	2.36	.901	22.89		
.200	5.08	1.000	25.40		

FIGURE 1. Meter, panel type.

AMSC N/A FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ± .015 (.38 mm).
4. Shroud design is optional.
5. Knurled edge required for mounting; optional for front flange.
6. The solder lug terminals shall accommodate wire of a diameter of .065 (1.65 mm) and may accommodate up to a maximum diameter of .105 (2.67 mm).
7. The O-ring shall be in accordance with SAE AS28775 (dynamic or static use), Part or Identifying Number (PIN) MS28775-213.

FIGURE 1. Meter, panel type - Continued.

REQUIREMENTS:
(Readings expressed as a percent of full-scale value.)

Dimensions and configuration: See figure 1.

Weight: 4 ounces maximum.

Case material: Metal or molded thermosetting plastic.

Full-scale ranges: See table I.

Scale:
Pointer deflection: 90 degrees minimum.
Length: .75 inch minimum.

Power consumption: 200 millivolts maximum.

Position influence: ± 3 percent.

Accuracy: ± 3 percent.

Overshoot: 50 percent maximum or damping factor of 2 minimum.

Response time: 3 seconds.

High temperature cycling:
± 4 percent.
± 4 percent permanent change.

Temperature influence: ± 1 percent.

Exposure to extreme temperatures:
± 8 percent.
± 3 percent permanent change.

Overload capacity:
Momentary overload: ± 2 percent.
Sustained overload:
± 2 percent temporary zero shift.
± 1 percent permanent zero shift.
± 2 percent permanent change.

Dielectric withstanding voltage: 1, 000 volts rms.

Supersession data: See table II.

TABLE I. Full-scale ranges.

Ammeters (Microamperes)	
Zero left	Zero Center
100	50-0-50
200	100-0-100
500	500-0-500

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession data.

Superseded type designation		New type designation
Style 04		Style 07
MR04W500DCUA		MR07W500DCUAR
MR04W5H5DCUA		MR07W5H5DCUAR
MR04W100DCUA		MR07W100DCUAR
MR04B500DCUA		MR07B500DCUAR
MR04B5H5DCUA		MR07B5H5DCUAR
MR04B100DCUA		MR07B100DCUAR
MR04F500DCUA		MR07F500DCUAR
MR04F5H5DCUA		MR07F5H5DCUAR
MR04F100DCUA		MR07F100DCUAR
MR04S500DCUA	1/	MR07P500DCUAR
MR04S5H5DCUA	1/	MR07P5H5DCUAR
MR04S100DCUA	1/	MR07P100DCUAR
Style 05		Style 05
MR05W500DCUA		MR05W500DCUAR
MR05W5H5DCUA		MR05W5H5DCUAR
MR05W100DCUA		MR05W100DCUAR
MR05B500DCUA		MR05B500DCUAR
MR05B5H5DCUA		MR05B5H5DCUAR
MR05B100DCUA		MR05B100DCUAR
MR05F500DCUA		MR05F500DCUAR
MR05F5H5DCUA		MR05F5H5DCUAR
MR05F100DCUA		MR05F100DCUAR
MR05S500DCUA	1/	MR05P500DCUAR
MR05S5H5DCUA	1/	MR05P5H5DCUAR
MR05S100DCUA	1/	MR05P100DCUAR
Style 06		Style 06
MR06W500DCUA		MR06W500DCUAR
MR06W5H5DCUA		MR06W5H5DCUAR
MR06W100DCUA		MR06W100DCUAR
MR06B500DCUA		MR06B500DCUAR
MR06B5H5DCUA		MR06B5H5DCUAR
MR06B100DCUA		MR06B100DCUAR
MR06F500DCUA		MR06F500DCUAR
MR06F5H5DCUA		MR06F5H5DCUAR
MR06F100DCUA		MR06F100DCUAR
MR06S500DCUA	1/	MR06P500DCUAR
MR06S5H5DCUA	1/	MR06P5H5DCUAR
MR06S100DCUA	1/	MR06P100DCUAR

1/ The color scheme code letter "S" has been superseded by the code letter "P". The type designations of all new units will carry the code letter "P" (when applicable) to indicate that non-radioactive material has been used for phosphorescent markings and pointer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-PRF-10304, this document references the following:

SAE AS28775

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – SH
Air Force – 99
DLA – CC

Preparing activity:
DLA – CC

(Project 6625-0944-000)

Review activities:
Army – AT, AV, CR4, MI
Navy – MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.