
MIL-M-10304/32
24 May 1974
SUPERSEDING
MIL-M-17275/4
14 April 1969


MILITARY SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED VOLTMETER, DC (FLUSH MOUNTING, ROUND FLANGE, 1 INCH), STYLES 05, 06, AND 07

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the meters described herein shall consist of this document and the latest issue of Specification MIL-M-10304.

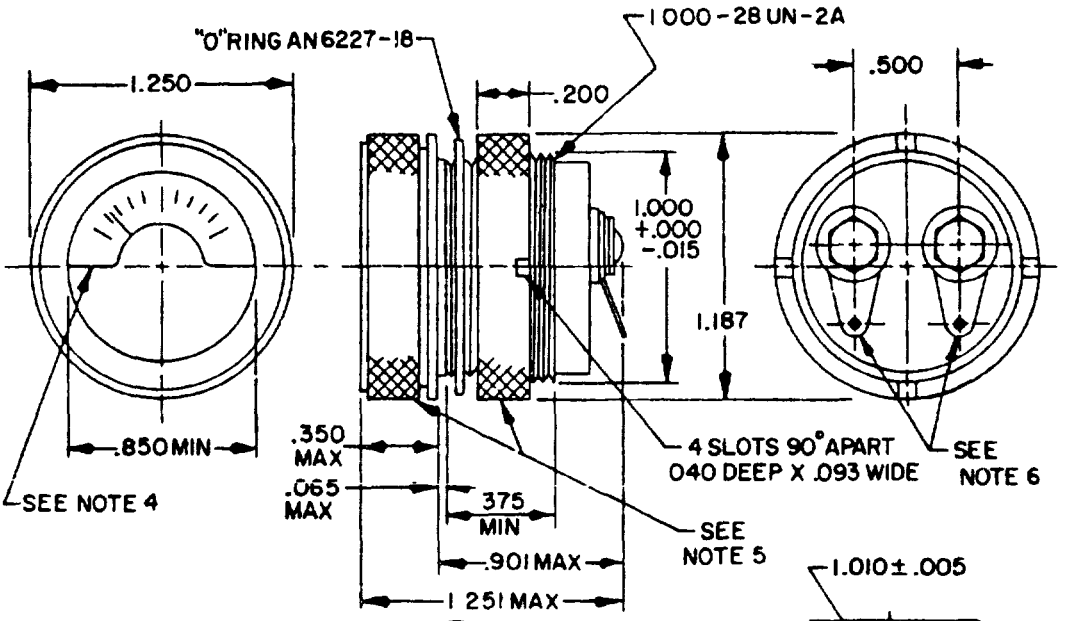




DIAL



SHROUD

MARKING ILLUSTRATION



PANEL DRILLING PLAN

INCHES	MM	INCHES	MM	INCHES	MM
005	13	.350	8 89	1 010	25 65
.015	38	.375	9.53	1.187	30.15
.040	1 02	.500	12 70	1.250	31 75
.065	1.65	.850	21.59	1.251	31 78
.093	2.36	.901	22.89		
.200	5.08	1.000	25 40		

NOTES:
1. Dimensions are in inches
2. Metric equivalents (to the nearest 01 mm) are given for general information only and are based upon 1 inch = 25 4 mm.
3. Unless otherwise specified, tolerance is ± 015 (38 mm)
4. Shroud design is optional.
5. Knurled edge required for mounting, optional for front flange
6. The solder lug terminals shall accommodate wire of a diameter of .065 (1 65 mm) and may accommodate up to a maximum diameter of 105 (2.67 mm)

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure.

Weight: 4 ounces maximum.

Case material: Metal or molded thermosetting plastic.

Full-scale ranges: See table I

Scale:
Pointer deflections: 90° minimum.
Length: .75 inch minimum.

Power consumption: 1 milliampere ±5 percent.

Position influence: ±3 percent.

Accuracy: ±3 percent.

Overshoot: 2.0 minimum.

Response time: 2.0 seconds.

High temperature cycling:
±4 percent.
±4 percent permanent change.

Temperature influence: ±1 percent.

Exposure to extreme temperatures
±8 percent.
±3 percent permanent change.

Overload capacity:
Momentary overload: ±2 percent.
Sustained overload
±2 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage: 1,000 rms.

TABLE I. Full-scale ranges.

Voltmeter	
Volts	
Zero left	Zero center
1.0	.5-0-.5
2.0	1-0-1
5.0	5-0-5
10.0	10-0-10
20.0	25-0-25
50.0	50-0-50
100.0	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession data.

Superseded type designation	New type designation
Style 04	Style 07
MR04*001DCVV	MR07*001DCVVR
MR04*005DCVV	MR07*005DCVVR
MR04*010DCVV	MR07*010DCVVR
MR04*050DCVV	MR07*050DCVVR
MR04*100DCVV	MR07*100DCVVR
Style 05	Style 05
MR05*001DCVV	MR05*001DCVVR
MR05*005DCVV	MR05*005DCVVR
MR05*010DCVV	MR05*010DCVVR
MR05*050DCVV	MR05*050DCVVR
MR05*100DCVV	MR05*100DCVVR
Style 06	Style 06
MR06*001DCVV	MR06*001DCVVR
MR06*005DCVV	MR06*005DCVVR
MR06*010DCVV	MR06*010DCVVR
MR06*050DCVV	MR06*050DCVVR
MR06*100DCVV	MR06*100DCVVR

* A, B, F, P, or W

Custodians:
Army - EL
Navy - EC
Air Force - 82

Review activities:
Army - EL, ME, AT, AV
Navy - EC, MC
Air Force - 11
DSA - ES

User activities:
Army - MI
Navy - CG
Air Force - None

Preparing activity
Army - EL

Agent:
DSA - ES

(Project 6625-0546)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL-RD-ZS
Fort Monmouth, New Jersey 07703

FOLD

To detach this [illegible], cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.

To detach this fc cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION MIL-M-10304/32 METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: VOLTMETER, DC (FLUSH MOUNTING, ROUND FLANGE, 1 INCH), STYLES 05, 06, AND 07

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.