PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: VOLTMETER, DC (FLUSH MOUNTING, ROUND FLANGE, 1 INCH), STYLES 05, 06, AND 07

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the meters described herein shall consist of this specification and MIL-PRF-10304.

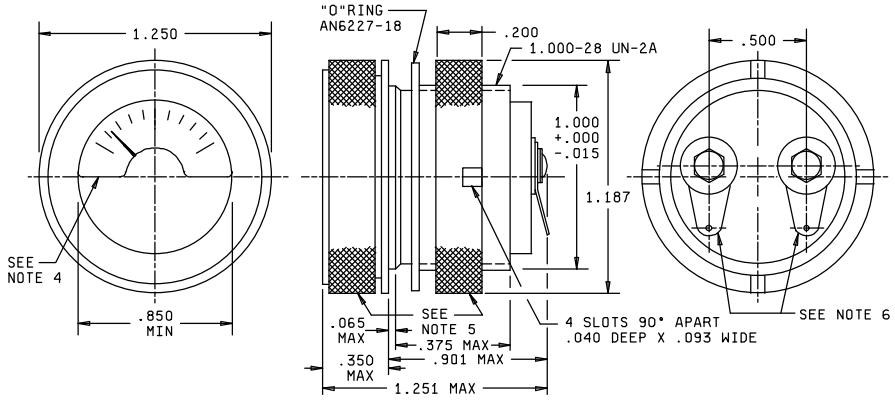

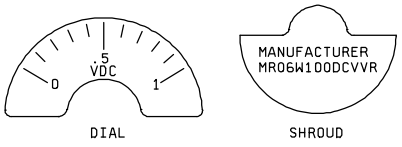

MARKING ILLUSTRATION



PANEL DRILLING PLAN

Inches	mm	Inches	mm	Inches	mm
.005	.13	.350	8.89	1.010	25.65
.015	.38	.375	9.53	1.187	30.15
.040	1.02	.500	12.70	1.250	31.75
.065	1.65	.850	21.59	1.251	31.78
.093	2.36	.901	22.89		
.200	5.08	1.000	25.40		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .015 (.38 mm).
4. Shroud design is optional.
5. Knurled edge required for mounting; optional for front flange.
6. The solder lug terminals shall accommodate wire of a diameter of .065 (1.65 mm) and may accommodate up to a maximum diameter of .105 (2.67 mm).

FIGURE 1. Meter, panel type.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Weight: 4 ounces maximum.

Case material: Metal or molded thermosetting plastic.

Full-scale ranges: See table I.

Scale:
Pointer deflections: 90° minimum.
Length: .75 inch minimum.

Power consumption: 1 milliampere ±5 percent.

Position influence: ±3 percent.

Accuracy: ±3 percent.

Overshoot: 2.0 minimum.

Response time: 3 seconds.

High temperature cycling:
±4 percent.
±4 percent permanent change.

Temperature influence: ±1 percent.

Exposure to extreme temperatures:
±8 percent.
±3 percent permanent change.

Overload capacity:
Momentary overload: ±2 percent.
Sustained overload:
±2 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage: 1, 000 volts rms.

Supersession data: See table II.

TABLE I. Full-scale ranges.

Voltmeter	
Millivolts	
Zero left	Zero Center
1.0	.5-0-.5
2.0	1-0-1
5.0	5-0-5
10.0	10-0-10
20.0	25-0-25
50.0	50-0-50
100.0	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession data.

Superseded type designation	New type designation
Style 04	Style 07
MR04*001DCVV	MR04*001DCVVR
MR04*005DCVV	MR04*005DCVVR
MR04*010DCVV	MR04*010DCVVR
MR04*050DCVV	MR04*050DCVVR
MR04*100DCVV	MR04*100DCVVR
Style 05	Style 05
MR05*001DCVV	MR05*001DCVVR
MR05*005DCVV	MR05*005DCVVR
MR05*010DCVV	MR05*010DCVVR
MR05*050DCVV	MR05*050DCVVR
MR05*100DCVV	MR05*100DCVVR
Style 06	Style 06
MR06*001DCVV	MR06*001DCVVR
MR06*005DCVV	MR06*005DCVVR
MR06*010DCVV	MR06*010DCVVR
MR06*050DCVV	MR06*050DCVVR
MR06*100DCVV	MR06*100DCVVR

*A, B, F, P, or W

Custodians:
Army - CR
Navy - SH
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 6625-0883)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.