INCH-POUND

MIL-PRF-10304/32A
w/AMENDMENT 1
18 January 2008
SUPERSEDING
MIL-PRF-10304/32A
26 April 1999

PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED:
VOLTMETER, DC (FLUSH MOUNTING, ROUND FLANGE, 1 INCH),
STYLES 05, 06, AND 07

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification sheet and MIL-PRF-10304.

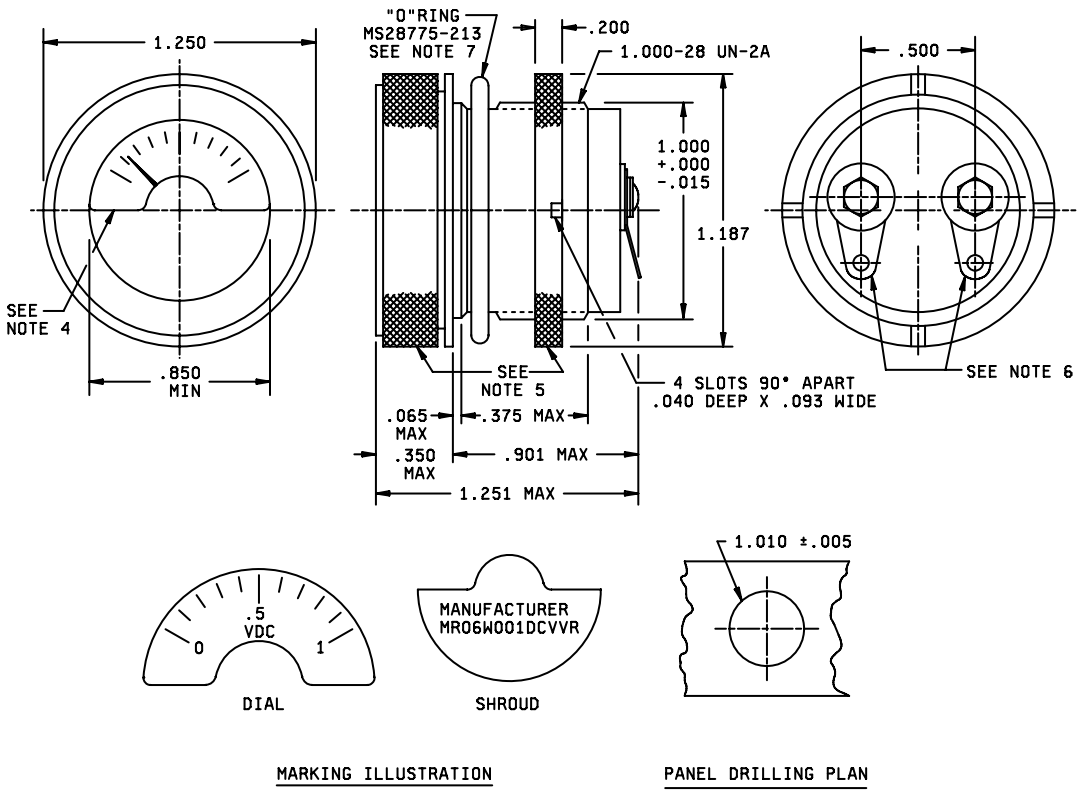


FIGURE 1. Meter, panel type.

AMSC N/A

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.005	.13	.350	8.89	1.010	25.65
.015	.38	.375	9.53	1.187	30.15
.040	1.02	.500	12.70	1.250	31.75
.065	1.65	.850	21.59	1.251	31.78
.093	2.36	.901	22.89		
.200	5.08	1.000	25.40		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ± .015 (.38 mm).
4. Shroud design is optional.
5. Knurled edge required for mounting; optional for front flange.
6. The solder lug terminals shall accommodate wire of a diameter of .065 (1.65 mm) and may accommodate up to a maximum diameter of .105 (2.67 mm).
7. The O-ring shall be in accordance with SAE AS28775 (table I, dynamic or static use), Part or Identifying Number (PIN) MS28775-213.

FIGURE 1. Meter, panel type - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Weight: 4 ounces maximum.

Case material: Metal or molded thermosetting plastic.

Full-scale ranges: See table I.

Scale:
Pointer deflection: 90 degrees minimum.
Length: .75 inch minimum.

Power consumption: 1 milliampere ± 5 percent.

Position influence: ± 3 percent.

Accuracy: ± 3 percent.

Overshoot: 50 percent maximum or minimum damping factor of 2.

Response time: 3 seconds.

High temperature cycling:
± 4 percent.
± 4 percent permanent change.

Temperature influence: ± 1 percent.

Exposure to extreme temperatures:
± 8 percent.
± 3 percent permanent change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.

Overload capacity:
Momentary overload: ± 2 percent.
Sustained overload:
± 2 percent temporary zero shift.
± 1 percent permanent zero shift.
± 2 percent permanent change.

Dielectric withstanding voltage: 1, 000 volts rms.

Supersession data: See table II.

TABLE I. Full-scale ranges.

Voltmeter	
Millivolts	
Zero left	Zero Center
1.0 2.0 5.0 10.0 20.0 50.0 100.0	.5-0-.5 1-0-1 5-0-5 10-0-10 25-0-25 50-0-50

TABLE II. Supersession data.

Superseded type designation 1/	New type designation 1/
Style 04	Style 07
MR04*001DCVV MR04*005DCVV MR04*010DCVV MR04*050DCVV MR04*100DCVV	MR04*001DCVVR MR04*005DCVVR MR04*010DCVVR MR04*050DCVVR MR04*100DCVVR
Style 05	Style 05
MR05*001DCVV MR05*005DCVV MR05*010DCVV MR05*050DCVV MR05*100DCVV	MR05*001DCVVR MR05*005DCVVR MR05*010DCVVR MR05*050DCVVR MR05*100DCVVR
Style 06	Style 06
MR06*001DCVV MR06*005DCVV MR06*010DCVV MR06*050DCVV MR06*100DCVV	MR06*001DCVVR MR06*005DCVVR MR06*010DCVVR MR06*050DCVVR MR06*100DCVVR

1/ The appropriate color scheme code letter of A, B, F, P, or W is located where the * appears above, as specified in MIL-PRF-10304 under the titles “Type designation” and “Color scheme”.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-PRF-10304, this document references the following:

SAE AS28775

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – SH
Air Force – 99
DLA – CC

Preparing activity:
DLA – CC

(Project 6625-0945-000)

Review activities:
Army – AV, MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:54Z
Check the source to verify that this is the current version before use.