
MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER TF5S03ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the transformer described herein shall consist of this specification and the latest issue of MIL-T-27.

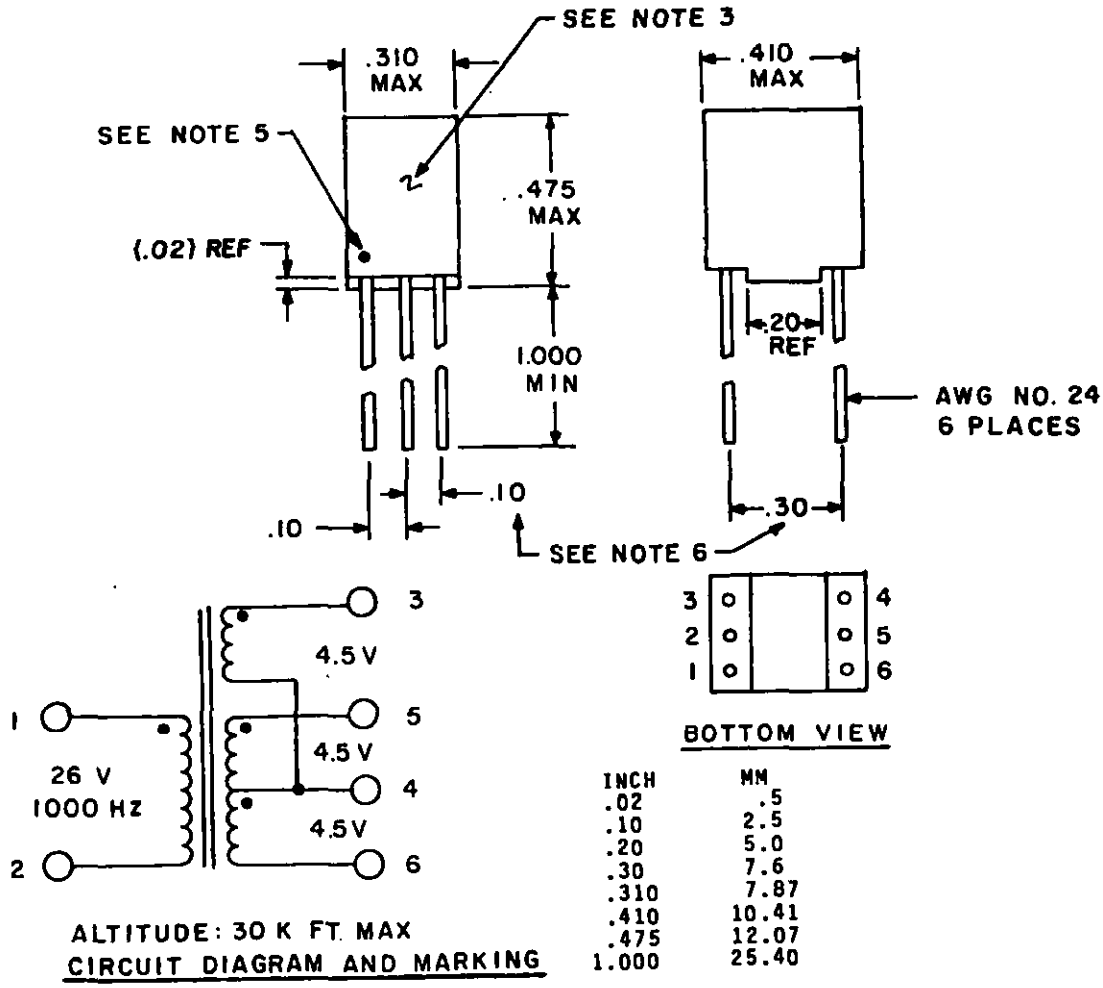

ALTITUDE: 30 K FT. MAX

CIRCUIT DIAGRAM AND MARKING

INCH	MM
.02	.5
.10	2.5
.20	5.0
.30	7.6
.310	7.87
.410	10.41
.475	12.07
1.000	25.40

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Marking shall be on the side of the case.
4. Unless otherwise specified tolerance is ±.01 (.25 mm) on two place dimensions.
5. Pin numbers shall be marked on bottom surface close to pins and color dot applied to side as shown nearest pin number 1.
6. Pin spacing dimensions controlled at point of egress from part.

FIGURE 1. Dimensions and configuration.

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Primary voltage (1-2): 26 ±2 percent volts rms, 1,000 ±50 hertz.

Primary current (1-2): 3 milliamperes.

Voltampere rating: .0045 voltampere.

Secondary voltage:

(3-4): 4.5 volts rms
(5-4): 4.5 volts rms.
(4-6): 4.5 volts rms.
(5-6): 9 volts rms.

Secondary current:

(3-4): 560 microamperes.
(5-4): 450 microamperes.
(4-6): 450 microamperes.
(5-6): 450 microamperes (ct).

Working voltage: 26 volts rms (primary).
4.5 volts rms (secondary).

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Encapsulated, diallyl phthalate.

Terminals: Tin plated nickel, solderable.

Terminal height: 1 inch minimum.

Altitude: 30,000 feet maximum.

Weight: 3.5 grams, maximum.

Operating temperature range: -55°C to +130°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage:

At sea level: 100 volts rms.
At reduced barometric pressure: 100 volts rms.

Electrical characteristics:

No load: With 26 volts rms, 1,000 hertz across (1-2), the current in (1-2) shall not exceed 3.0 milliamperes.

Voltage across:

(3-4): 4.5 volts ±2 percent.
(5-4): 4.5 volts ±2 percent.
(4-6): 4.5 volts ±2 percent.
(5-6): 9.0 volts ±4 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:21Z
Check the source to verify that this is the current version before use.

Rated load: With 26 volts rms, 1,000 hertz across (1-2), the voltage across:

(3-4): 4.5 volts ct ±2 percent.
(5-4): 4.5 volts ±2 percent.
(4-6): 4.5 volts ±2 percent.
(5-6): 9.0 volts ±4 percent.

DC resistance:

(1-2): 900 ohms, maximum.
(3-4): 210 ohms, maximum.
(5-4): 210 ohms, maximum.
(6-4): 210 ohms, maximum.

Polarity: See figure 1.

Temperature rise: 20°C with 26 volts rms, 1,000 hertz across (1-2) at an ambient temperature of 100°C.

Marking location: See figure 1.

Part number: M27/355-01.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, ME
Navy - AS, MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5950-0615-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:21Z
Check the source to verify that this is the current version before use.