MIL-B-83665B
2 JUNE 1981
SUPERSEDING
MIL-B-83665A
13 Dec 1972

MILITARY SPECIFICATION

BAG, PILOT RELIEF (MALE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type of disposable plastic bag suitable for the collection, retention, and temporary storage of urine (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Issues of Documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal

L-P-375	Plastic Film, Flexible, Vinyl Chloride
PPP-B-26	Bag, Plastic, (General Purpose)
PPP-B-566	Boxes, Folding, Paperboard
PPP-B-636	Box, Shipping, Fiberboard
PPP-B-676	Box, Set-up

Military

MIL-P-116	Preservation-packaging, Methods of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: AFALD/PTP, Wright-Patterson Air Force Base OH 45433 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:13Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-1188	Commercial Packaging of Supplies and Equipment

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Material.

3.1.1 Recycled and reclaimed materials. Recycled and reclaimed materials may be used if the quality of the product is not impaired.

3.1.2 Bag. The bag shall be fabricated from a flexible plastic film conforming to L-P-375, type II, class 1, colorless.

3.1.3 Thickness of film. The wall thickness for the bag shall be no less than 6 mils (0.15 mm).

3.1.4 Absorbent. Bag shall contain an absorbent of either sponge type compressed cellulose or granular material capable of absorbing 500 cm^3 of urine.

3.1.5 Tubing or sheets. Tubing or sheets used shall be clean and free from pinholes, tears, cracks, blisters, creases, nicks, and cuts or other defects which will impair its usefulness for the intended purpose.

3.2 Design and construction.

3.2.1 Design. The finished bag shall be of flat rectangular configurations as depicted in figure 1. Both sides and one end shall be sealed. The opening or neck of the bag shall incorporate means for preventing spillage when bag is inverted and shall not impede flow input.

3.2.2 Dimensions. The dimensions of the bag shall be as specified in figure 1.

3.2.3 Closure. Closure shall be by means of a 28 gage steel (corrosion resistant), 3/8 inch wide (10 mm) band or wire of equal strength and flexibility imbedded or laminated in vinyle plastic to enable ease of folding or rolling in producing a positive closure. The wire or band shall form an integral part of the bag during fabrication;

3.2.4 Seams. All seams shall be made by heat (thermal) sealing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:13Z
Check the source to verify that this is the current version before use.

	MINIMUM I.D.		MAXIMUM I.D.	
	INCHES	MM	INCHES	MM
Neck Opening (NO)	3 3/4	95.3	4 1/4	108
Neck Length (NL)	3 1/2	88.9	4 1/2	114.3
Reservior Width (RW)	6 1/4	152.6	6 3/4	153.1
Reservior Length (RL)	6 3/4	153.1	7 1/4	178

Closure (See 3.2.3)

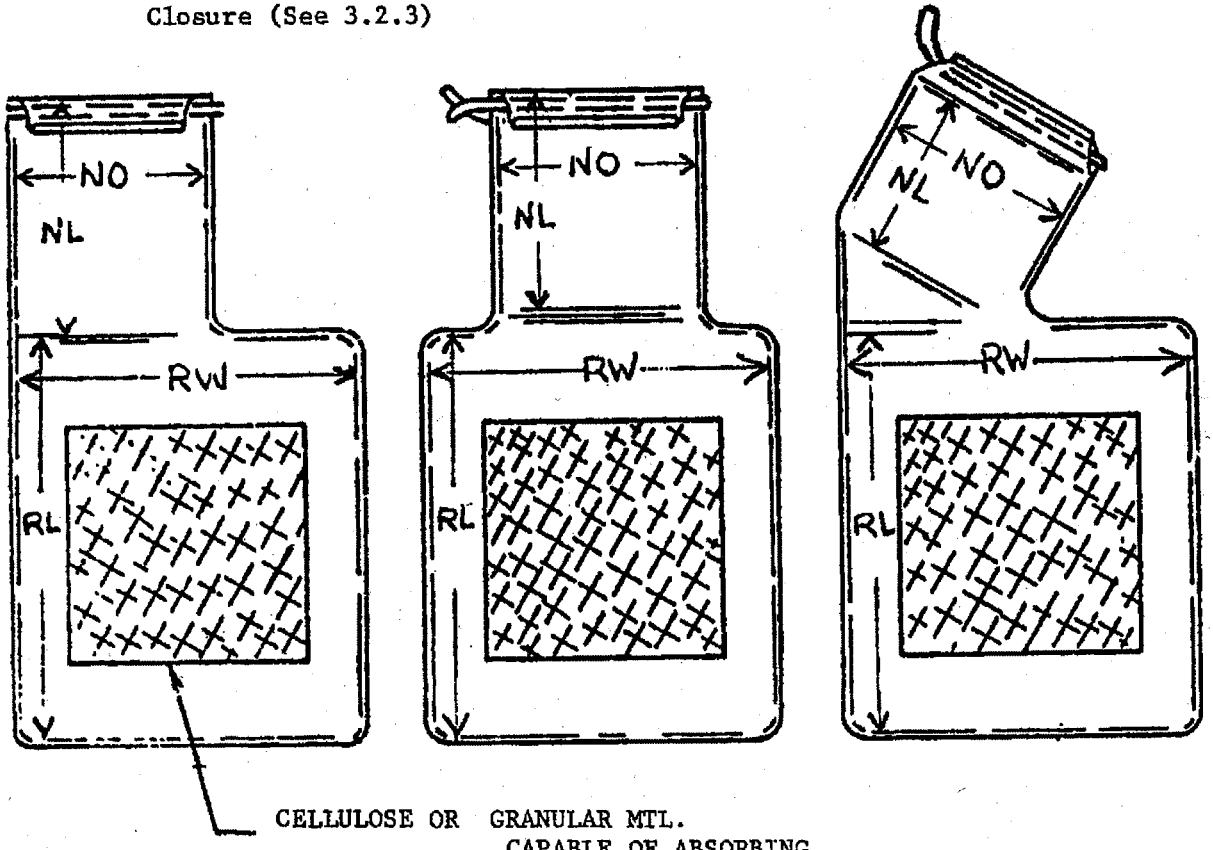


FIGURE 1. Configurations and dimensions of bags.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:13Z
Check the source to verify that this is the current version before use.

3.2.5 Directions for use. Brief instructions for opening of bag and closure after use shall be printed on one side of bag or on a card which will be inserted in neck opening.

3.3 Workmanship. The bag shall be uniformly constructed. The bag shall be easy to open for immediate use. The finished product shall conform to the requirements specified herein and shall be free from defects which detract from its appearance or impair its serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection and testing of the bags specified herein are classified as follows:

Quality conformance inspection (see 4.4)

4.3 Sampling. Sample bags shall be selected at random from each lot in accordance with MIL-STD-105. The inspection level shall be S-1 with an acceptable quality level (AQL) of 10.

4.4 Tests.

4.4.1 Examination of product. Each sample bag shall be tested in sequence hereunder and shall be examined to determine conformance with this specification with respect to materials, workmanship, and general requirements.

4.4.2 Inverted leakage test. The bag shall be filled with a minimum of 550 cm^3 of water and, without closing, quickly inverted. There shall be no more than 30 cm^3 of liquid spilled from the opening during a one-minute period.

4.4.3 Performance leakage test. After completion of test in 4.4.2, the opening or top of the bag shall be closed by rolling or folding down to within approximately 1/2 inch (13 mm) of the main body of the bag. Fold metal tabs to secure rolled or folded end. The bag shall be laid in a horizontal position on a flat, smooth level surface. A dead weight with smooth edges and corners, 6 inches by 10 inches (15.2 cm x 25.4 cm) and weighing 12 pounds (5.4 kg), shall be placed centrally on top of the bag. After allowing the bag to remain in this position for a period of one hour, the bag shall show no evidence of leakage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:13Z
Check the source to verify that this is the current version before use.

4.4.4 Drop test. Three consecutive drops shall be made from a height of 6 feet (1.8 m), to a smooth, hard surface. There shall be no failure of the seams, closure, or leakage of water.

4.4.5 Packaging inspection. The inspection of the preservation-packaging and interior package marking shall be in accordance with the group A and B quality conformance inspection requirements of MIL-P-116. The inspection of the packing and marking for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

5. PACKAGING.

5.1 Preservation-packaging. Packaging shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Cleaning. Cleaning will be in accordance with MIL-P-116, method C-1.

5.1.1.2 Drying. Drying will be by any method that will not adversely affect the material.

5.1.1.3 Unit packaging. Unless otherwise specified (see 6.2), each bag will be unit packaged in a plastic bag conforming to Type II, Grade A, Style 1 of PPP-B-26. Closure shall be by heat sealing. Unit protection shall be method III of MIL-P-116.

5.1.1.4 Intermediate packaging. Unless otherwise specified (see 6.2), the bags shall be packaged in intermediate containers conforming to specification PPP-B-566 or PPP-B-676. Quantity shall be limited to size and limitations of the container.

5.1.2 Commercial. Cleaning, drying, preservation, and packaging shall be in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A. Bags packaged as specified in 5.1 shall be packed in a box conforming to PPP-B-636, Class Weather-Resistant and closed in accordance with the appendix thereto.

5.2.2 Level B. Bags packaged as specified in 5.1 shall be packed in a box conforming to PPP-B-636, Class Domestic.

5.2.3 Commercial. Bags packaged as specified in 5.1 shall be packed in accordance with MIL-STD-1188.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:13Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Level A & B. In addition to any special marking required by the contract or order, unit packages, intermediate packages, and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

5.3.2 Commercial. Marking shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The bags procured under this specification are intended (but not limited) for use of male personnel in fighter, observation, helicopter, hospital and similar aircraft where built-in relief facilities are not available.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Quantity. Number per unit pack. Intermediate packaging. (see 5.1.1.3, 5.1.1.4).

c. Applicable level of packaging (see 5.1).

d. Applicable level of packing (see 5.2).

6.3 Storage. Store in a dry, cool place.

6.4 Changes from previous issue. Astericks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

6.5 Ordering information. As of the date of this revision, NSN 8105-00-922-9469 was assigned to the commodity described herein. Purchasers should verify the NSN before ordering.

Custodian:
Air Force - 69
Reviewer:
Air Force - 99
User:
Army - GL, MD

PREPARING ACTIVITY:
Air Force - 69
Project No.: 8105-F280

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:13Z
Check the source to verify that this is the current version before use.