
MILITARY SPECIFICATION SHEET

CONNECTOR, TELECOMMUNICATION, POLARIZED SHELL, RECEPTACLE, FEMALE

RACK AND PANEL, SOLDER CONTACTS, SCREWLOCK

This specification sheet is approved for use by the Air Force Acquisition Logistics Division, Directorate of Electronic Support (AFALD/PTSP), Gentile Air Force Station, OH 45444, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-83515/2 (USAF).

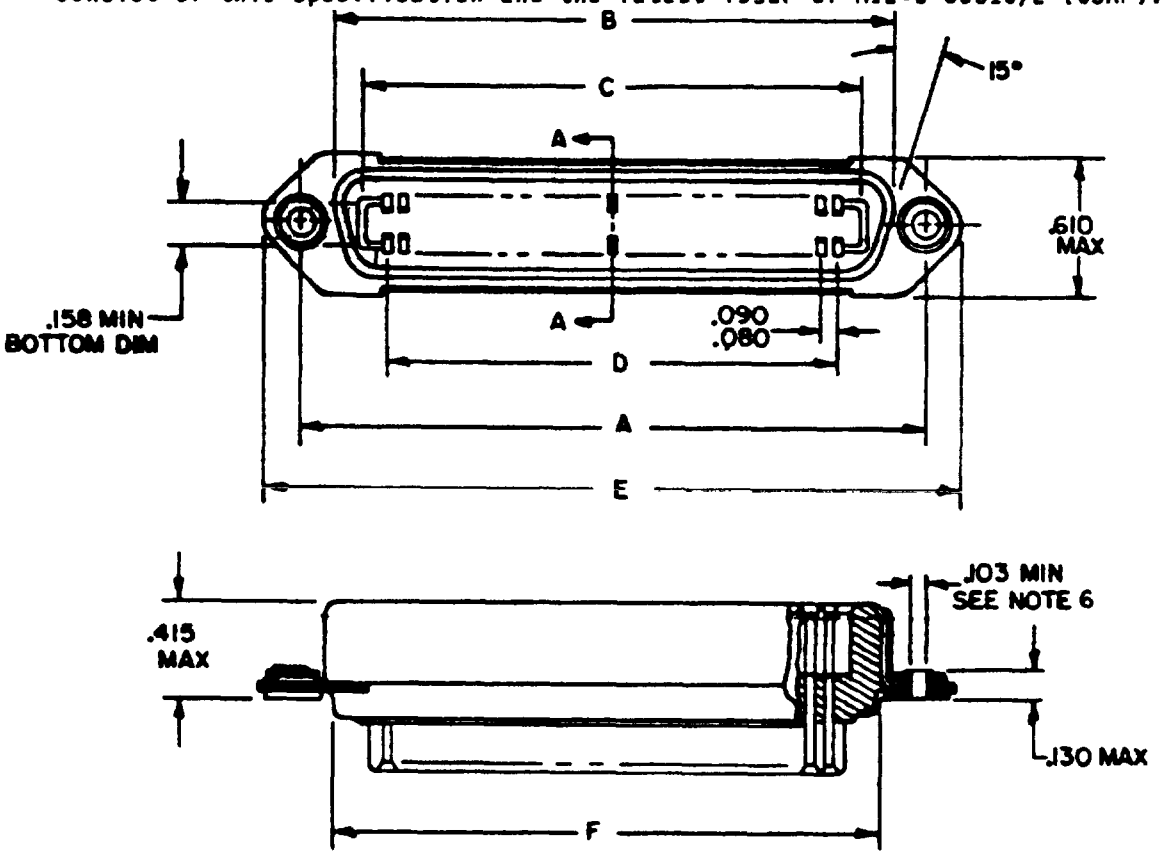


INCHES	MM	INCHES	MM
.080	2.03	.415	10.54
.090	2.29	.475	12.06
.103	2.62	.610	15.49
.130	3.30	.700	17.78
.158	4.01	.750	19.05
.300	7.62		


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Solder cups shall terminate #22, #24, and #26 AWG, solid or stranded wire.
4. All dimensions are after plating
5 All undimensioned pictorial representations are for reference purposes only.
6. Bushing allows center conductor to float .020 (.51 mm) minimum in any radial direction from mounting centers.

FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.

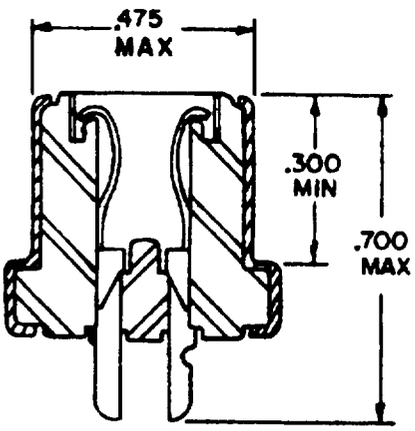

LOW BARRIER TYPE

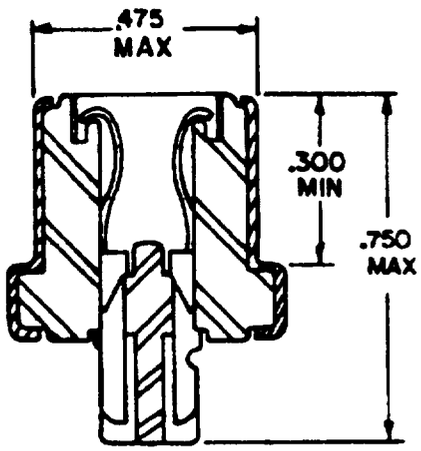

HIGH-BARRIER TYPE

SECTION A-A

Size	A		B	C	D		E	F
	Min	Max	Max	Min	Min	Max	Max	Max
14	1.412 (35.86)	1.422 (36.12)	1.000 (25.40)	.695 (17.65)	.505 (12.83)	.515 (13.08)	1.750 (44.45)	.910 (23.11)
24	1.837 (46.66)	1.847 (46.91)	1.429 (36.30)	1.119 (28.42)	.930 (23.62)	.940 (23.88)	2.175 (52.24)	1.335 (33.91)
36	2.347 (59.61)	2.357 (59.87)	1.930 (49.02)	1.630 (41.40)	1.440 (36.58)	1.450 (36.83)	2.685 (68.20)	1.845 (46.86)
50	2.942 (74.73)	2.952 (74.98)	2.530 (64.26)	2.224 (56.49)	2.035 (51.69)	2.045 (51.94)	3.280 (83.31)	2.440 (61.98)

Metric equivalents are in parentheses.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.


TABLE I. Mating connector.

Receptacle dash number	Mating connector	Mating connector	Mating connector
01	M83515/1-01 or M83515/1-06	M83515/3-01 or M83515/3-06	M83515/5-01 or M83515/5-06
02	M83515/1-02 or M83515/1-07	M83515/3-02 or M83515/3-07	M83515/5-02 or M83515/5-07
03	M83515/1-03 or M83515/1-08	M83515/3-03 or M83515/3-08	M83515/5-03 or M83515/5-08
04	M83515/1-04 or M83515/1-09	M83515/3-04 or M83515/3-09	M83515/5-04 or M83515/5-09
06	M83515/1-01 or M83515/1-06	M83515/3-01 or M83515/3-06	M83515/5-01 or M83515/5-06
07	M83515/1-02 or M83515/1-07	M83515/3-02 or M83515/3-07	M83515/5-02 or M83515/5-07
08	M83515/1-03 or M83515/1-08	M83515/3-03 or M83515/3-08	M83515/5-03 or M83515/5-08
09	M83515/1-04 or M83515/1-09	M83515/3-04 or M83515/3-09	M83515/5-04 or M83515/5-09


TABLE II. Dash number.

Dash number	Number of contacts	Barrier type
01	14	Low
02	24	Low
03	36	Low
04	50	Low
06	14	High
07	24	High
08	36	High
09	50	High

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.

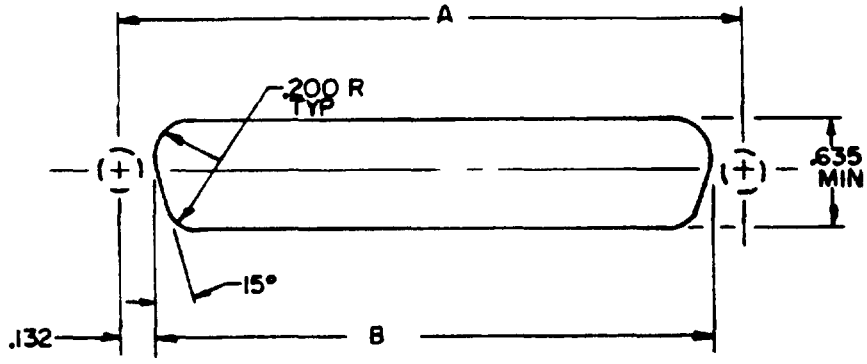

BACK MOUNTING

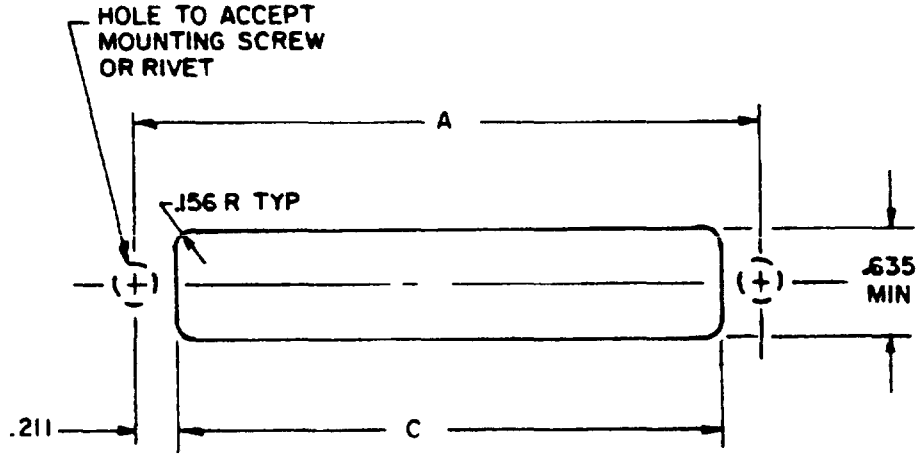

FRONT MOUNTING

Number of contacts	A	B Min	C Min
14	1.417 (35.99)	1.153 (29.29)	.995 (25.27)
24	1.842 (46.79)	1.578 (40.08)	1.420 (36.07)
36	2.352 (59.74)	2.088 (53.04)	1.930 (49.02)
50	2.947 (74.85)	2.683 (68.15)	2.525 (64.14)

Metric equivalents are in parentheses.

INCHES	MM
.132	3.35
.156	3.96
.200	5.08
.211	5.36
.635	16.13

FIGURE 2. Mounting layout.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Specified mating connector: For testing, the specified mating connector shall be as specified in table I.

Operating temperature range: -55° to +125°C.

Contact current rating: 5 amperes maximum per contact.

Part number: M83515/2-(dash number from table II).

Custodian:
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

User activities:
Air Force - 11, 17, 19

Preparing activity:
Air Force - 85

(Project 5935-F114-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 4966 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Directorate of Electronic Support
ATTN: AFALD/PTS
Gentile AFS OH 45444

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-83515/2(USAF)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.