

MILITARY SPECIFICATION SHEET

CONNECTOR, ELECTRIC, RECTANGULAR, INDIVIDUAL CONTACT SEALING, POLARIZED CENTER JACKSCREW, PLUG, CRIMP REMOVABLE PIN CONTACTS, CLASS E

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-85028(AS).

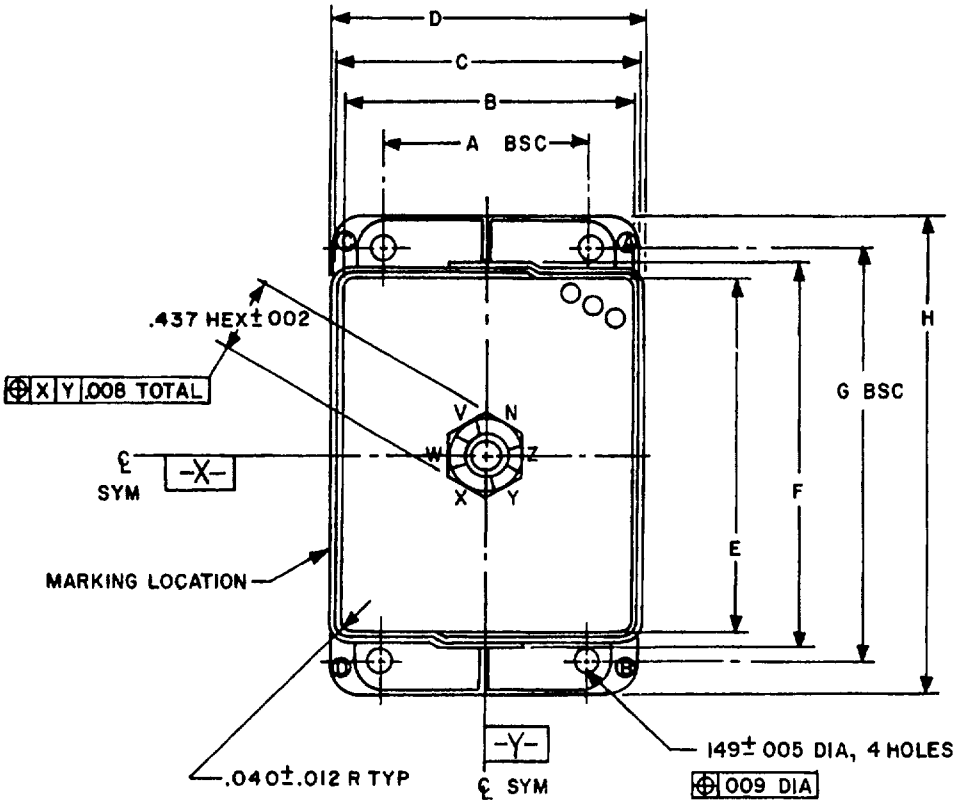

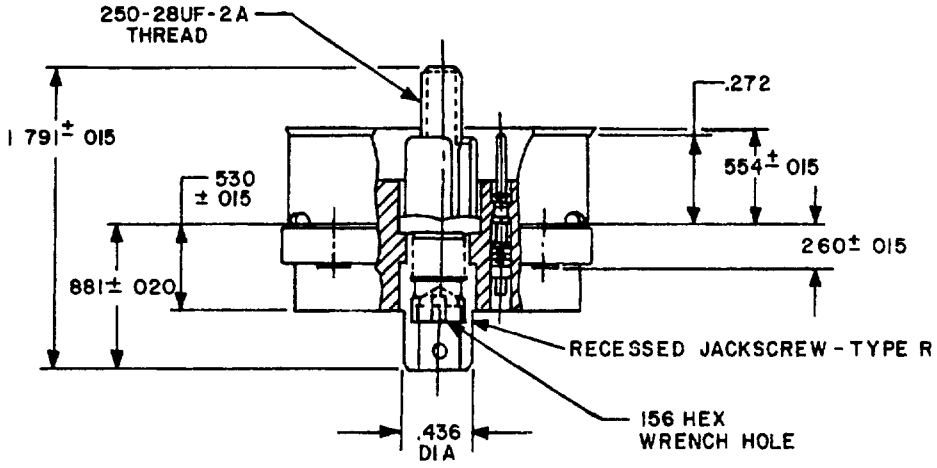


FSC-5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:59Z
Check the source to verify that this is the current version before use.

TYPE R

DASH NO	NO OF CONTS	A BSC	B ±.007	C ±.007	D ±.007	E ±.007	F ±.007	G BSC	H ±.007	WEIGHT(GRAMS) MAX (WITH CONTACTS AND SEALS)	INSERT ARRANGEMENT MIL-STD-1674
1	52	550	997	1 090	1.150	1 562	1 775	1 900	2 275	73	10 1
2	80	.812	1 257	1 350	1.410	1 707	1 920	2 045	2 420	105	20 1
3	104	812	1 257	1 350	1 410	2 163	2 375	2.500	2 875	124	30 1
4	158	1 250	1 767	1 860	1.920	2 163	2 375	2.500	2.875	150	40 1
5	212	1 850	2 297	2 390	2 450	2 163	2 375	2500	2 875	175	50 1

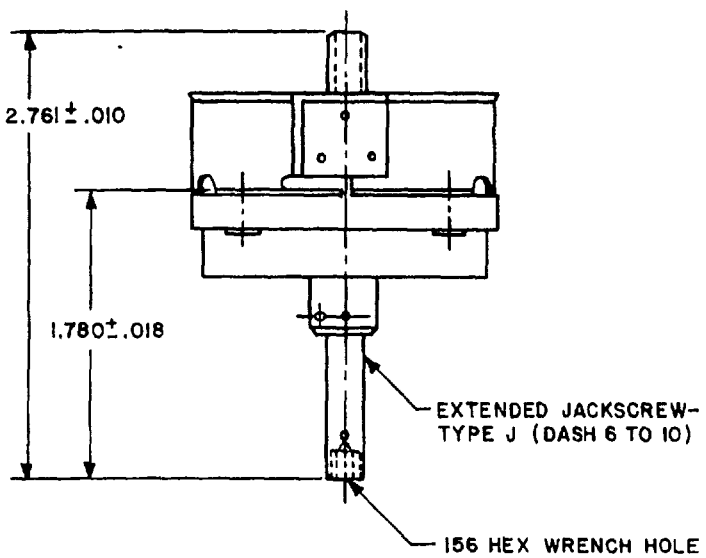

TYPE J

DASH NO	NO OF CONTS	WEIGHT (GRAMS) MAX (WITH CONTACTS AND SEALS)
6	52	98
7	80	130
8	104	149
9	158	175
10	212	201

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:59Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
.002	.05	1 150	29.21
005	13	1 250	31.75
007	18	1 257	31.93
008	.20	1 350	34 29
009	23	1 410	35. 81
010	.25	1 562	39 67
.012	.30	1 707	43.36
015	.38	1 .767	44.88
.018	46	1 775	45.09
.020	.51	1 780	45 21
.040	1.02	1 791	45 49
.060	1.52	1 850	46 99
.149	3 .78	1 860	47 24
.156	3 .96	1 900	48.26
250	6 35	1 920	48 79
260	6 60	2 045	51 54
272	6 .91	2 163	54 94
436	11 .07	2 275	57 79
437	11 .10	2 .297	58 34
530	13 .46	2 375	60 33
.550	13 .97	2 390	60.71
554	14 .07	2 420	61.46
.812	20 .62	2 450	62 23
881	22 .38	2 500	63 50
997	25 32	2 761	70 13
1 090	27 69	2 875	73.03

NOTE

1. Dimensions are in inches
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25 4 mm
3. Pin contacts used with this connector shall conform to MIL-C-39029/70
4. Sealing Plugs used with this connector shall conform to MIL-C-85028/4
5. Interfacial Seals used with this connector shall conform to MIL-C-85028/3.
6. Wire Seals used with this connector shall conform to MIL-C-85028/5

Custodian.
Navy - AS
Review Activity.
Navy - EC

Preparing Activity:
Navy - AS
Project No. 5935-N033-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:59Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE MIL-C-85028/1(AS) CONNECTOR, ELECTRIC, RECTANGULAR, INDIVIDUAL CONTACT SEALING, POLARIZED CENTER JACKSCREW, PLUG, CRIMP REMOVABLE PIN CONTACTS, CLASS E.

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?
☐ YES ☐ NO (If "Yes", in what way?)

4. REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)	TELEPHONE NO
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:59Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, New Jersey 08733

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD 316

U.S.MAIL

Engineering Specifications and Standards Department (Code 9312)
Naval Air Engineering Center
Lakehurst, New Jersey 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:59Z
Check the source to verify that this is the current version before use.