
MILITARY SPECIFICATION SHEET

SOCKETS, PLUG-IN ELECTRONIC COMPONENTS, ROUND STYLE (TO5, PRESS TO FIT)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83502.

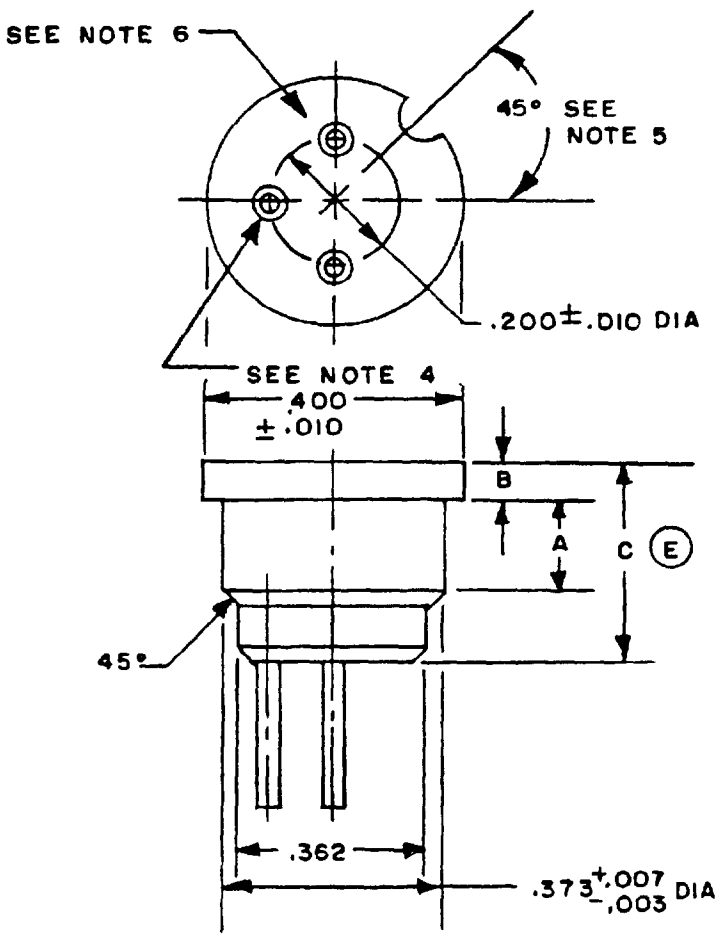


DASH NOS.
002, 003, 004

FIGURE 1. Dimensions and configurations.

(E) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.

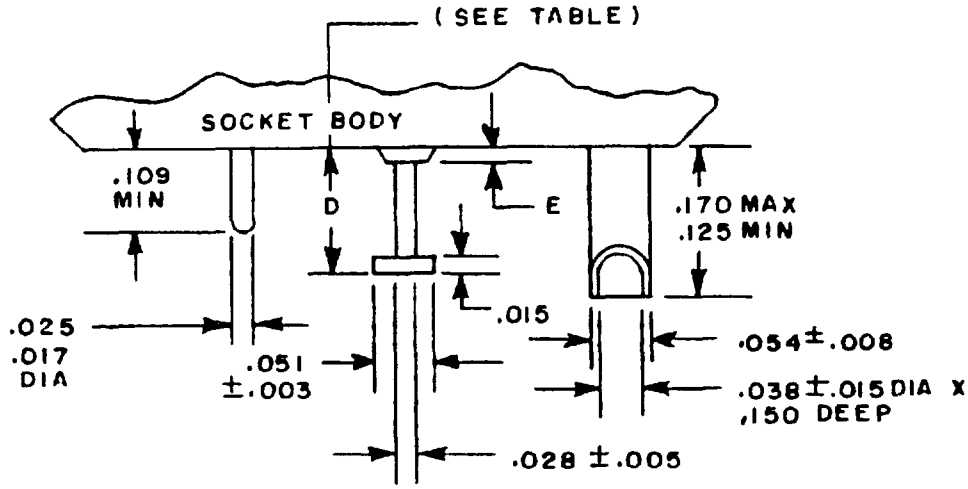

TYPE II, TYPE III, TYPE IV

TERMINAL DIMENSION

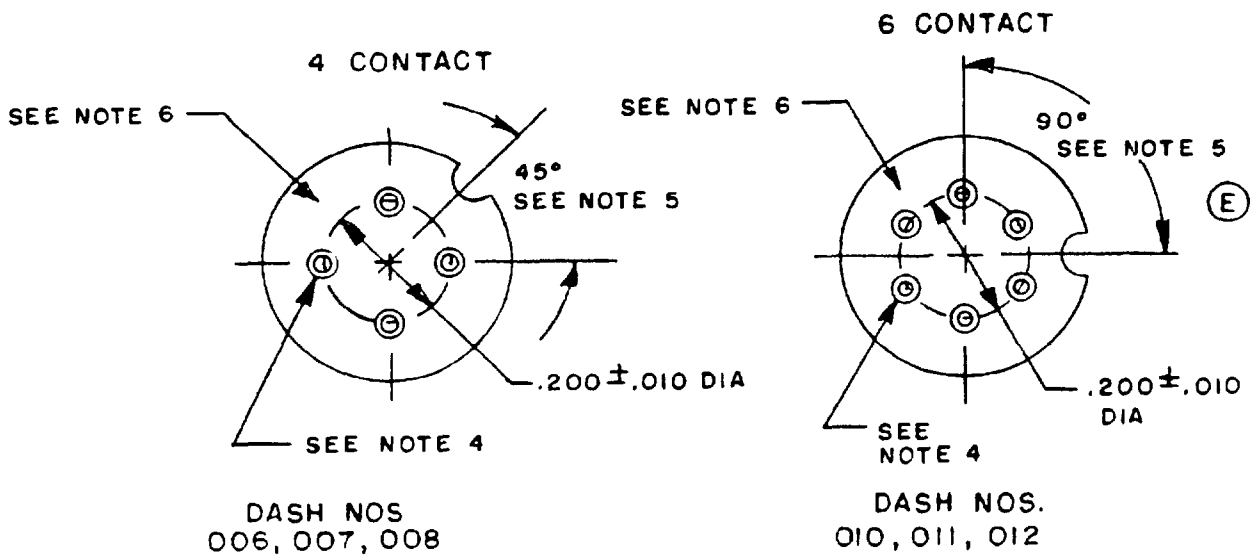


FIGURE 1. Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.

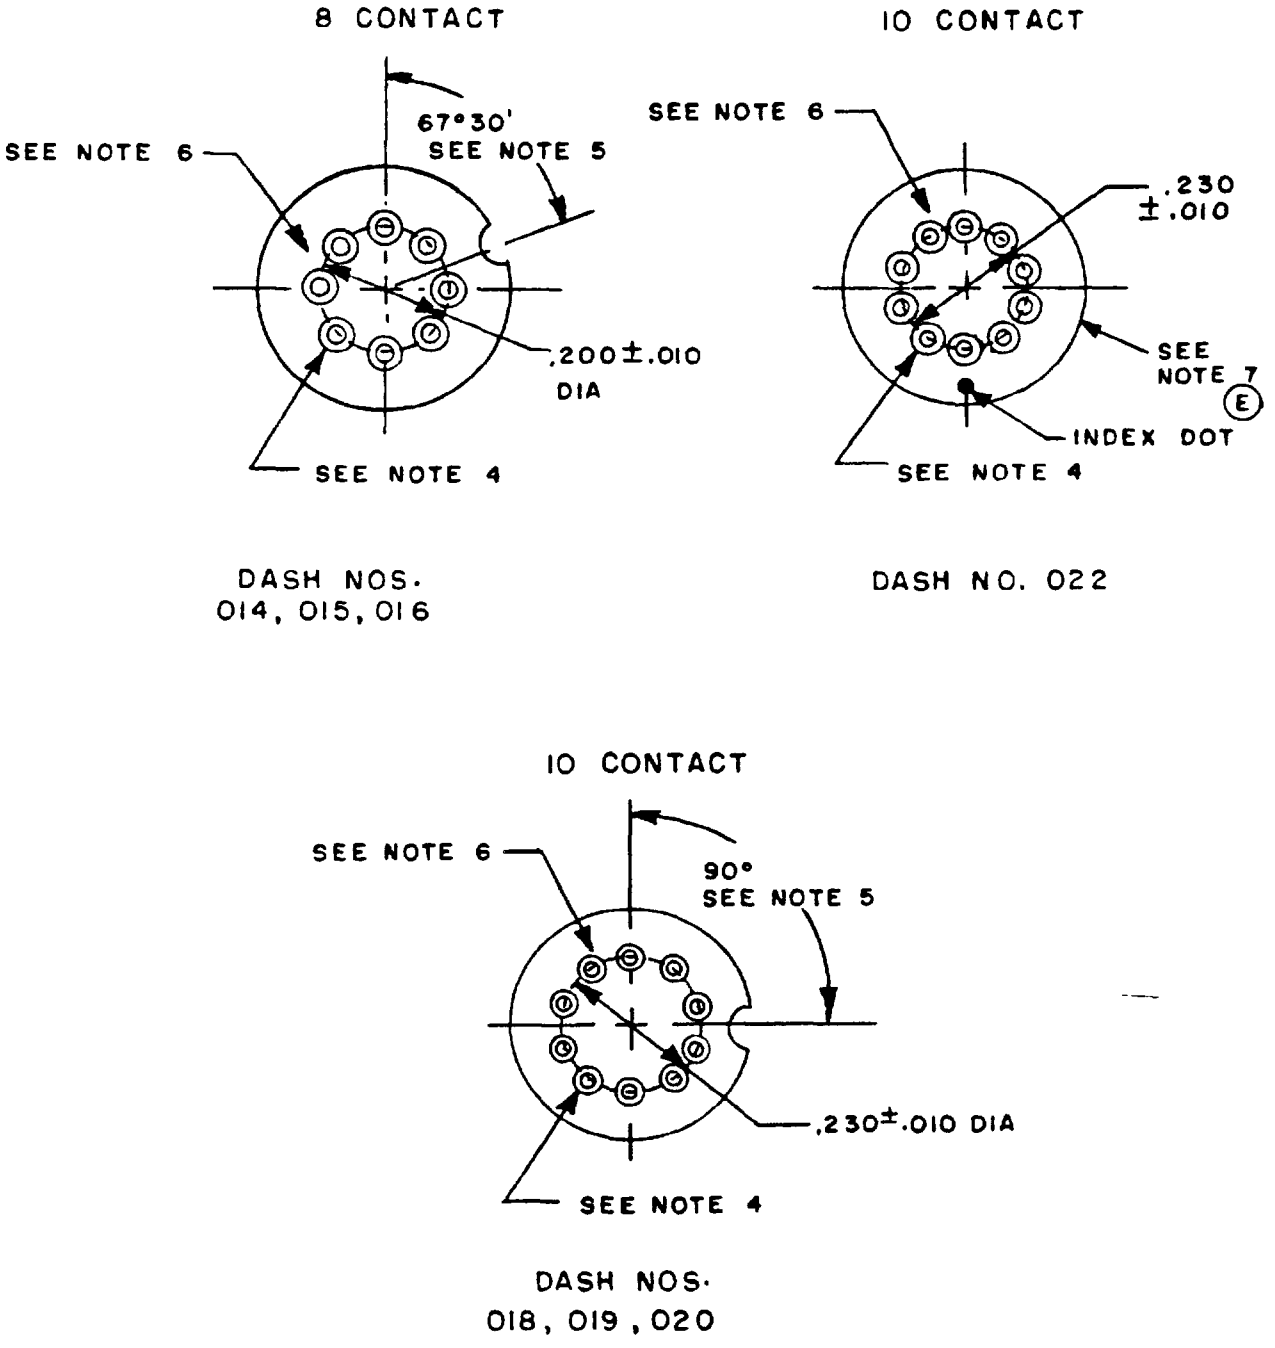


FIGURE 1. Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:19Z
Check the source to verify that this is the current version before use.

Dash number	Termination type	Number of contacts	Dimensions inches				
			A ±.031	B	C ±.010	D ±.015	E ±.003
002	II	3	.150	.060	.270		
003	III	3	.150	.060	.270	.160	.028
004	IV	3	.150	.060	.270		
006	II	4	.150	.060	.270		
007	III	4	.150	.060	.270	.160	.028
008	IV	4	.150	.060	.270		
010	II	6	.150	.060	.270		
011	III	6	.150	.060	.270	.093	.035
012	IV	6	.150	.060	.270		
014	II	8	.150	.060	.270		
015	III	8	.150	.060	.270		
016	IV	8	.150	.060	.270		
018	II	10	.150	.060	.270		
019	III	10	.150	.060	.270	.093	.035
020	IV	10	.150	.060	.270		
022 See note 7	II	10					

FIGURE 1. Dimensions and configurations - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.

Inches	mm
.003	0.08
.005	0.13
.006	0.15
.007	0.18
.008	0.20
.010	0.25
.015	0.38
.017	0.4
.025	0.64
.028	0.71
.031	0.78
.035	0.89
.038	0.97
.051	1.30
.054	1.37
.060	1.52
.093	2.36
.109	2.77
.125	3.18
.150	3.81
.160	4.06
.170	4.32
.200	5.08
.230	5.84
.270	6.86
.362	9.19
.373	9 47
.400	10.16

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 inch (0.13 mm).
4. Devices -002 through -020, to accept leads .017 inch (0.43 mm) diameter +.003 inch (0.08 mm) -.001 inch (0.03 mm) by .156/.218 inch long (3.96/5.54 mm). Devices -022, .017 inch (0.43 mm) diameter +.003 inch (0.08 mm) -.001 inch (0.03 mm) by .125/.165 inch long (3.18/4.19 mm). Contact shall be made at or before reaching a depth of .100 inch (2.54 mm).
5. A visual polarization index to be provided in the first quadrant. Location of index dot (inside or outside the socket circle) shall be optional.
6. Marking shall be on the package.
7. Socket is cylindrical in shape having .406 inch maximum diameter (10.31 mm) and is .165 inch long (4.19 mm), ±0.10 inch (0.25 mm).

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.

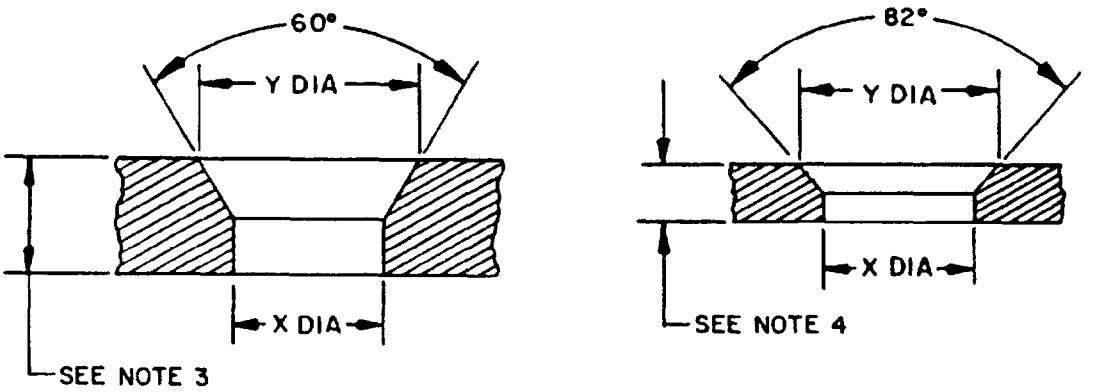

Bushing minor diameter See figure 1 +.007 -.003 (.18) (.08)	Hole or punch diameter "X" ± 002 (.05)	Diameter "Y" +.010 -.000 (.25)
373 (9.47)	.366/.369 (9.30)/(9.37)	.380 (9.65)

NOTES:
1. For recommended installation procedure drill or punch hole in chassis for press-fit of socket.
2. For printed circuit mounting drill holes to accept terminals.
3. Use 60° countersink for chassis thickness .040 inch (1.02 mm) and over.
4. Use 82° countersink for chassis thickness. 039 inch (1.02 mm) and under.
5. Dimensions are in inches.
6. Metric equivalents are given for general information only.
7. Metric equivalents are in parentheses.

FIGURE 2. Recommended mounting.

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction.

Dimensions and configuration: See figure 1.

Termination: Type II, printed circuit; type III, turrets; type IV, solder cup.

Mounting: See figure 2.

Material:

(E) Body: TFE-flourocarbon rod in accordance with ASTM D1710.

(E) Contact: Beryllium copper in accordance with QQ-C-530 or C72500 spinodal alloy in accordance with ASTM B740.

Terminal: Brass in accordance with QQ-B-626.

Contact finish. Gold over nickel plating in accordance with MIL-S-83502.

Part or Identifying Number (PIN). M83502/2 -(dash number from table I)

TABLE I. Dash number and characteristics.

Dash number M83502/2-	Number of contacts	Termination type	Mating force (maximum) (lbs.)	Retention force (minimum) (lbs.)
002	3	II	4.0	4.5
003	3	III	4.0	4.5
004	3	IV	4.0	4.5
006	4	II	4.0	4.5
007	4	III	4.0	4.5
008	4	IV	4.0	4.5
010	6	II	2.5	3.0
011	6	III	2.5	3.0
012	6	IV	2.5	3.0
014	8	II	2.5	3.0
015	8	III	2.5	3.0
016	8	IV	2.5	3.0
018	10	II	2.5	3.0
019	10	III	2.5	3.0
020	10	IV	2.5	3.0
022	10	II	2.5	3.0

These sockets are intended for use on .093 nominal printed circuit boards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH
Air Force - 11, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - AS, MC
Air Force - 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3724-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:19Z
Check the source to verify that this is the current version before use.