MILITARY SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, RECTANGULAR, MULTIPLE INSERT TYPE, RACK TO PANEL, ENVIRONMENT RESISTING, 150°C CONTINUOUS OPERATING TEMPERATURE, SHELL SIZE 3

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83527.


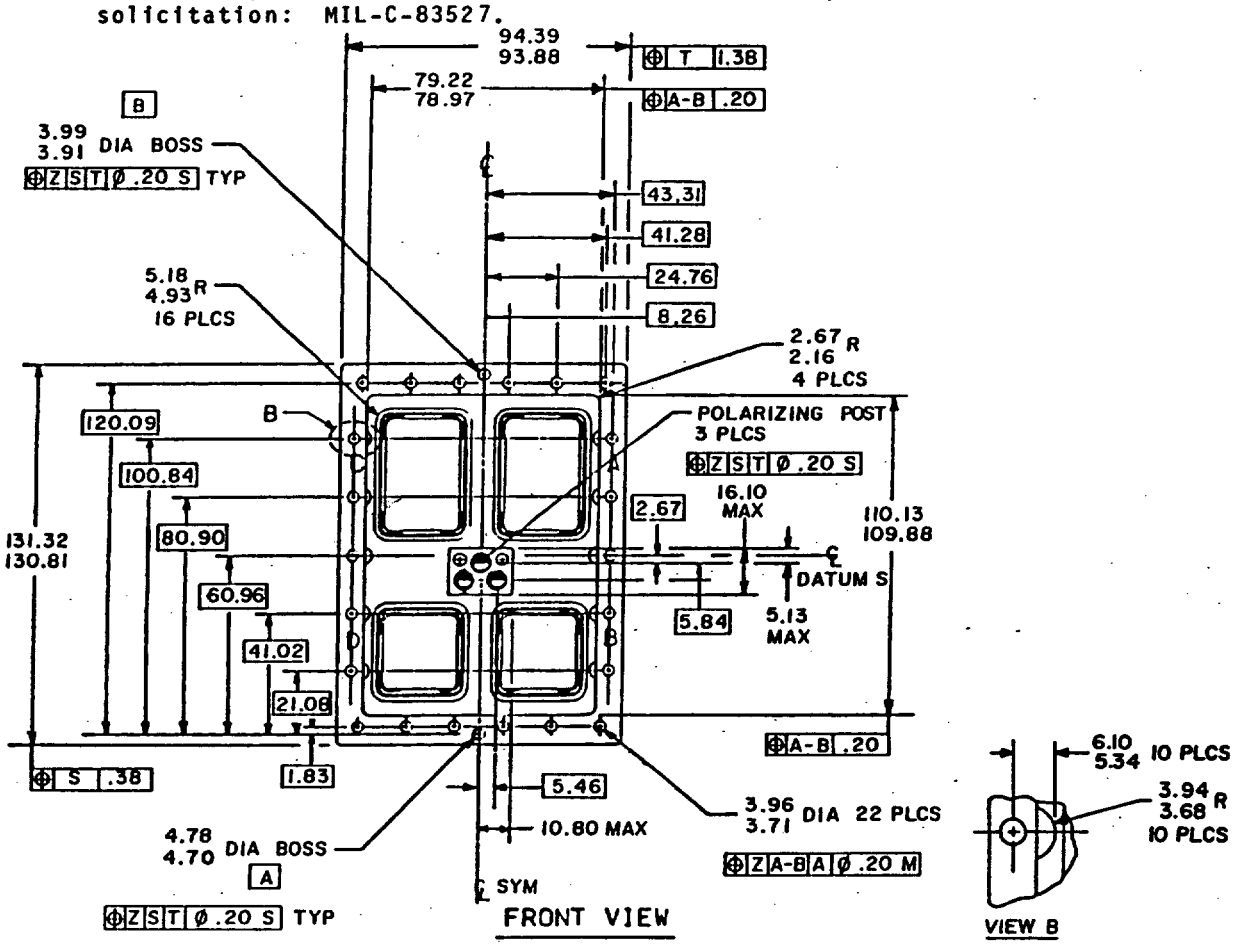


FIGURE 1. Connector, plug.


(A) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

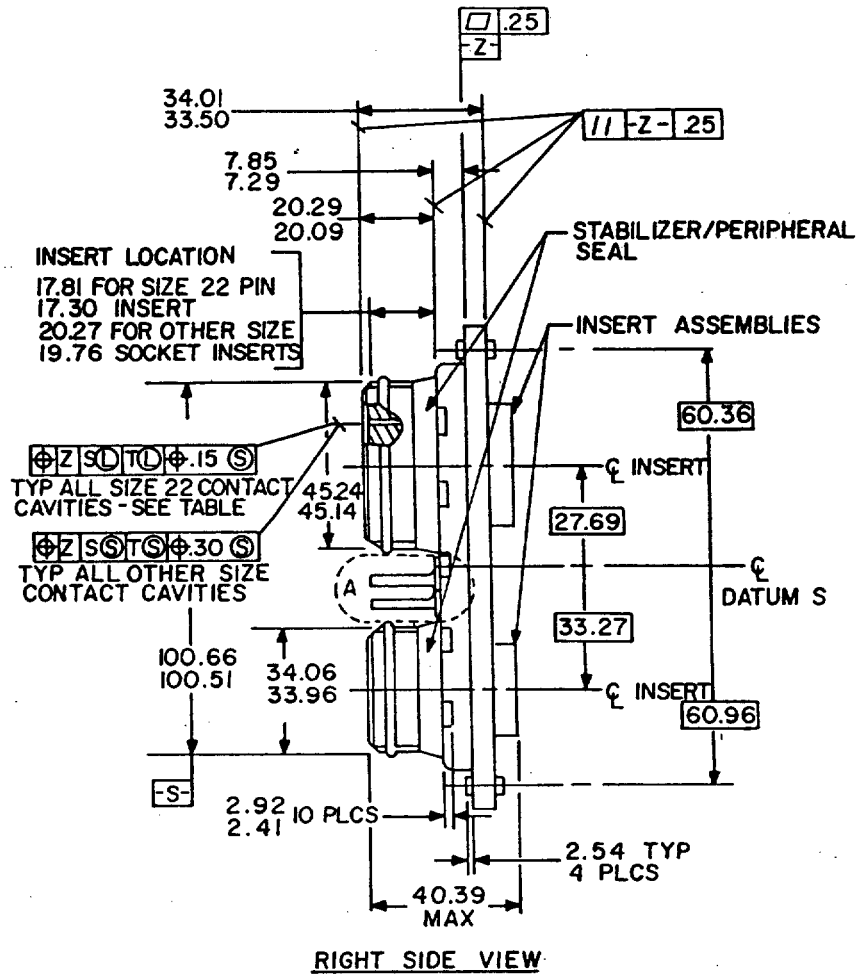

RIGHT SIDE VIEW

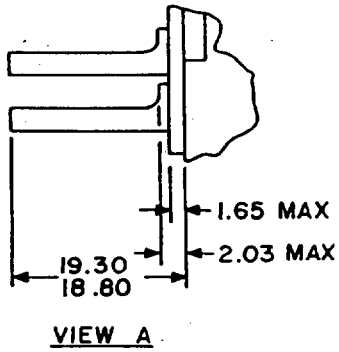


VIEW A

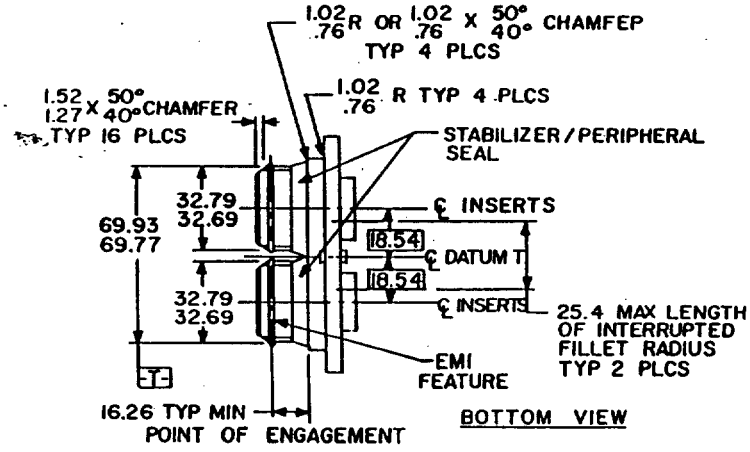

BOTTOM VIEW

FIGURE 1. Connector, plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

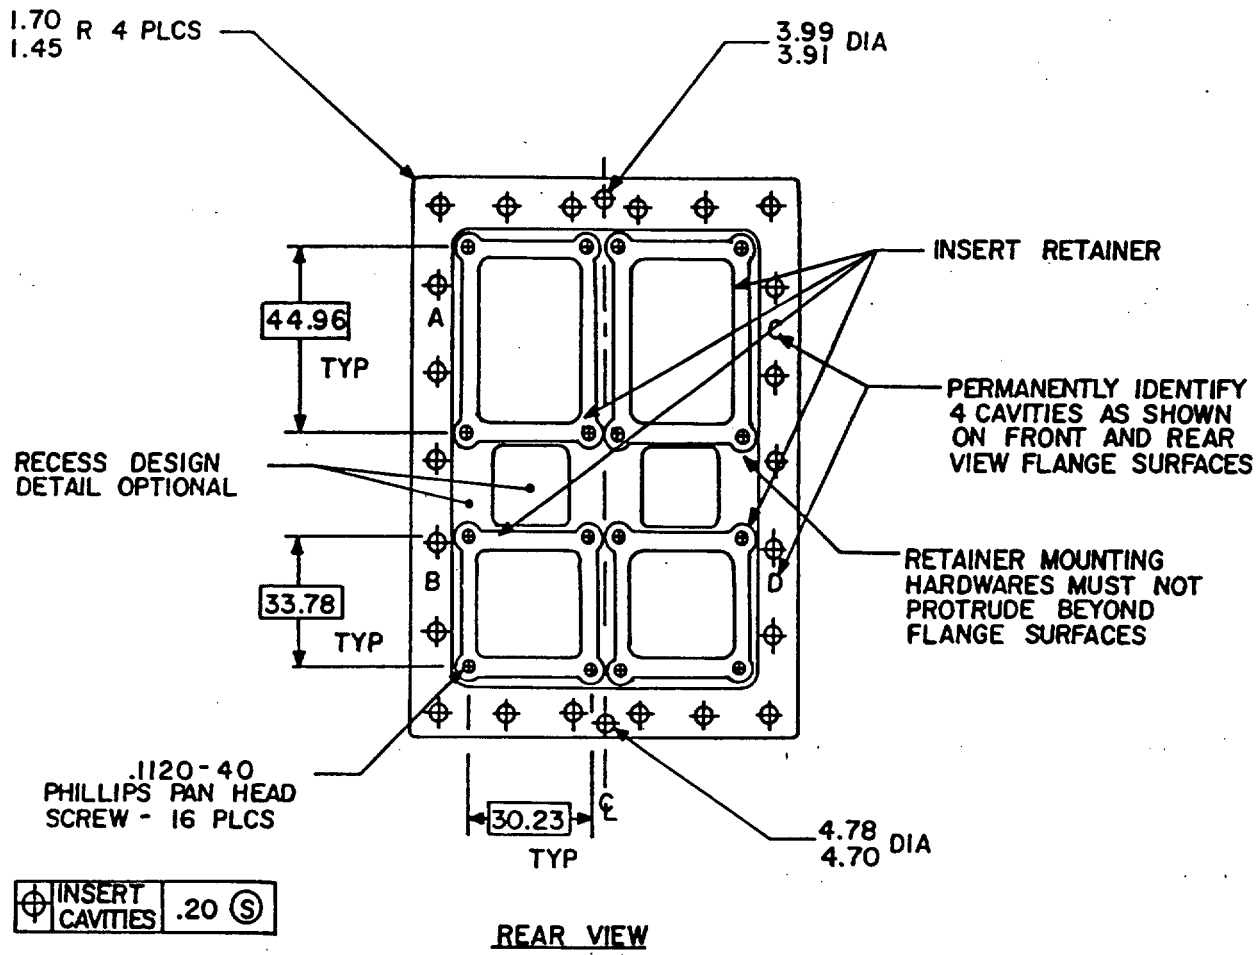

REAR VIEW

Size 22 contact cavity TP requirement

Datum T	Datum S						
	100.66(3.963)	100.64(3.962)	100.61(3.961)	100.58(3.960)	100.56(3.959)	100.53(3.958)	100.51(3.957)
69.93(2.753)	.30(.012)	.30(.012)	.30(.012)	.28(.011)	.25(.010)	.23(.009)	.20(.008)
69.90(2.752)	.30(.012)	.30(.012)	.30(.012)	.28(.011)	.25(.010)	.23(.009)	.20(.008)
69.88(2.751)	.30(.012)	.30(.012)	.30(.012)	.28(.011)	.25(.010)	.23(.009)	.20(.008)
69.85(2.750)	.28(.011)	.28(.011)	.28(.011)	.25(.010)	.23(.009)	.23(.009)	.20(.008)
69.82(2.749)	.25(.010)	.25(.010)	.25(.010)	.23(.009)	.23(.009)	.20(.008)	.18(.007)
69.80(2.748)	.23(.009)	.23(.009)	.23(.009)	.23(.009)	.20(.008)	.18(.007)	.18(.007)
69.77(2.747)	.20(.008)	.20(.008)	.20(.008)	.20(.008)	.18(.007)	.18(.007)	.15(.006)

FIGURE 1. Connector, plug - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

mm	Inch	mm	Inch	mm	Inch	mm	Inch
0.15	.006	3.07	.120	13.54	.533	40.39	1.590
0.18	.007	3.71	.146	14.05	.553	41.02	1.615
0.20	.008	3.91	.154	16.10	.634	41.88	1.649
0.25	.010	3.96	.156	17.91	.705	42.14	1.659
0.30	.012	3.99	.157	18.67	.735	45.14	1.777
0.38	.015	4.67	.184	19.18	.755	45.24	1.781
0.58	.023	4.70	.185	20.70	.815	54.79	2.236
0.76	.030	4.78	.188	21.08	.830	57.30	2.256
1.02	.040	4.93	.194	24.76	.975	60.96	2.4
1.45	.057	5.13	.202	27.69	1.090	80.90	3.185
1.70	.067	5.18	.204	27.74	1.092	100.51	3.957
1.78	.070	5.44	.214	28.24	1.112	100.61	3.961
1.83	.072	5.46	.215	32.69	1.287	100.66	3.963
1.88	.074	5.84	.230	32.79	1.291	100.71	3.965
2.03	.080	5.94	.234	33.27	1.310	100.84	3.970
2.16	.085	8.26	.325	33.76	1.329	109.88	4.326
2.54	.1	10.80	.425	33.96	1.337	110.13	4.336
2.62	.103	12.78	.503	34.06	1.341	120.09	4.728
2.67	.105	13.28	.523	34.46	1.357	120.19	4.732
						130.81	5.15
						131.32	5.170

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are in parentheses.
3. Inch equivalents are given for general information only.

FIGURE 1. Connector, plug - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: Shall be in accordance with figure 1.

Contacts: See MIL-C-39029/93, /94, /95, /98, and /100.

Ⓐ Inserts: See MIL-STD-1842 and MIL-C-83527/7.

Mating connector: See MIL-C-83527/4.

Ⓐ Military part or identifying number (PIN):

M83527	/03-	A	002

Basic specification identifier

Specification sheet number

See footnote 1/

Insert designator from DOD-STD-1842

Ⓐ 1/ "A" designator for insert with contacts, "B" designator for insert without contacts.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3623-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.