
MILITARY SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, RECTANGULAR, MULTIPLE INSERT TYPE, RACK TO PANEL, ENVIRONMENT RESISTING, 150°C CONTINUOUS OPERATING TEMPERATURE, SHELL SIZE 4

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification sheet and the latest issue of DOD-C-83527.

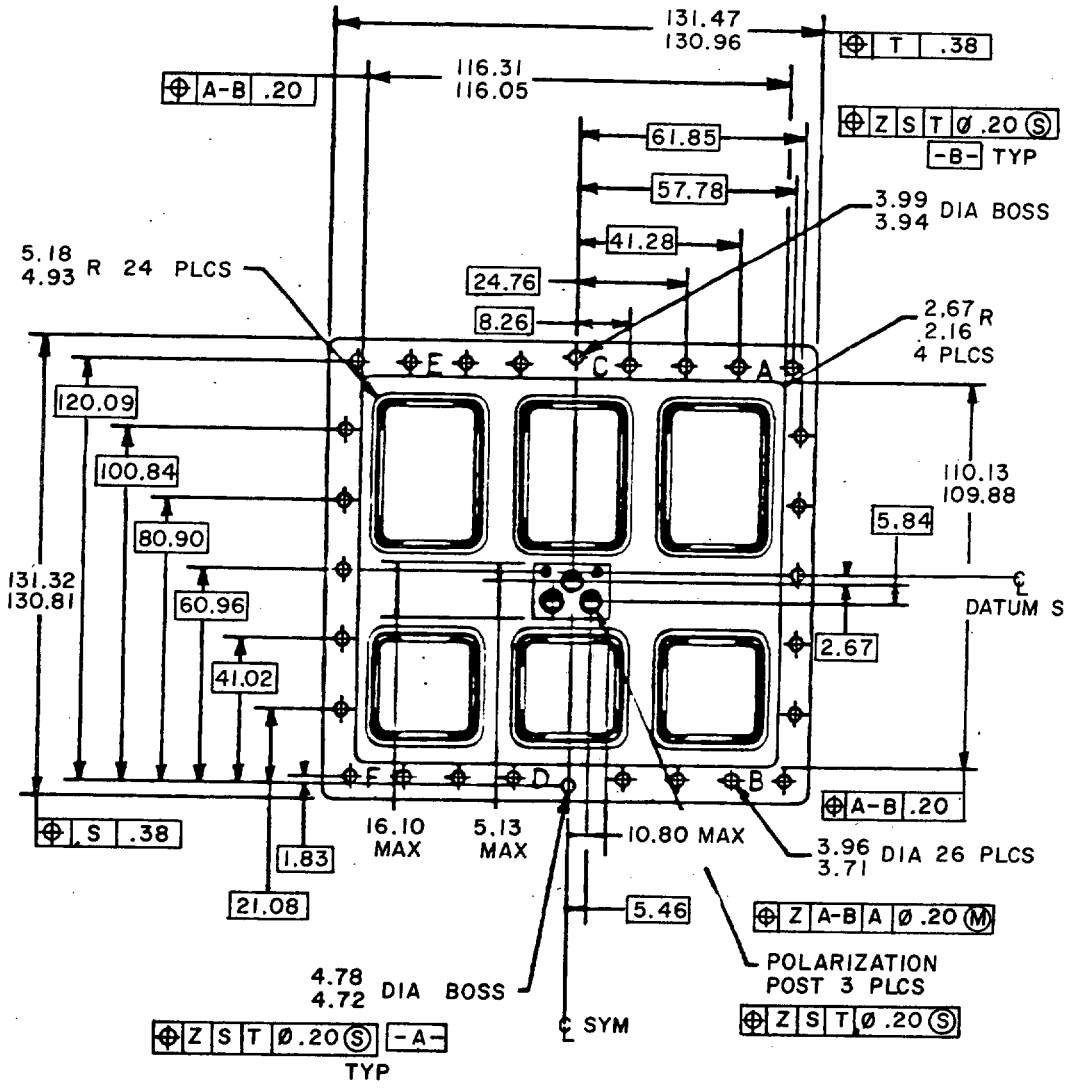


FRONT VIEW

FIGURE 1. Connector, plug.

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

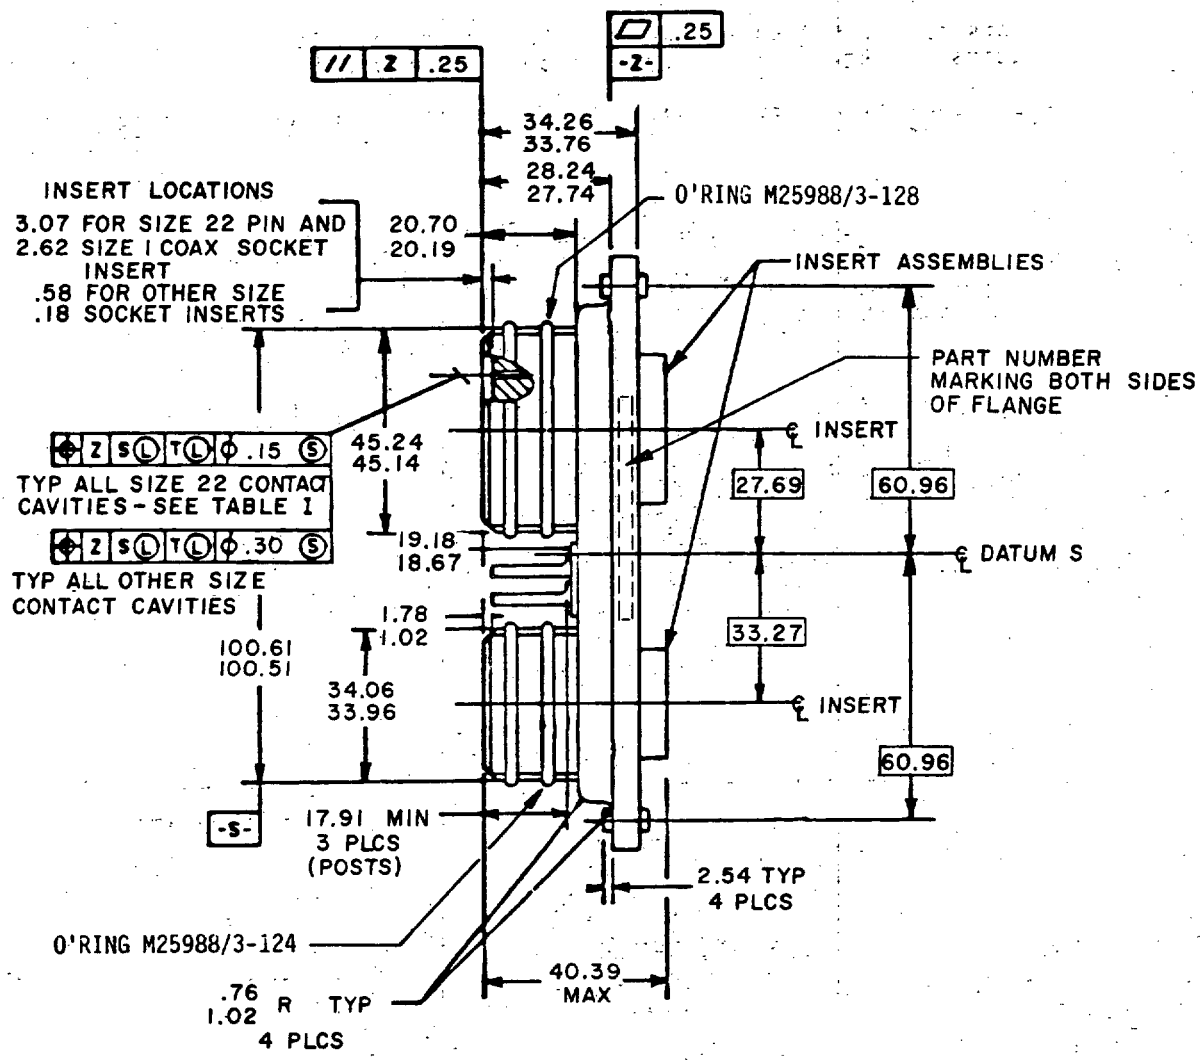

RIGHT SIDE VIEW

FIGURE 1. Connector, plug - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

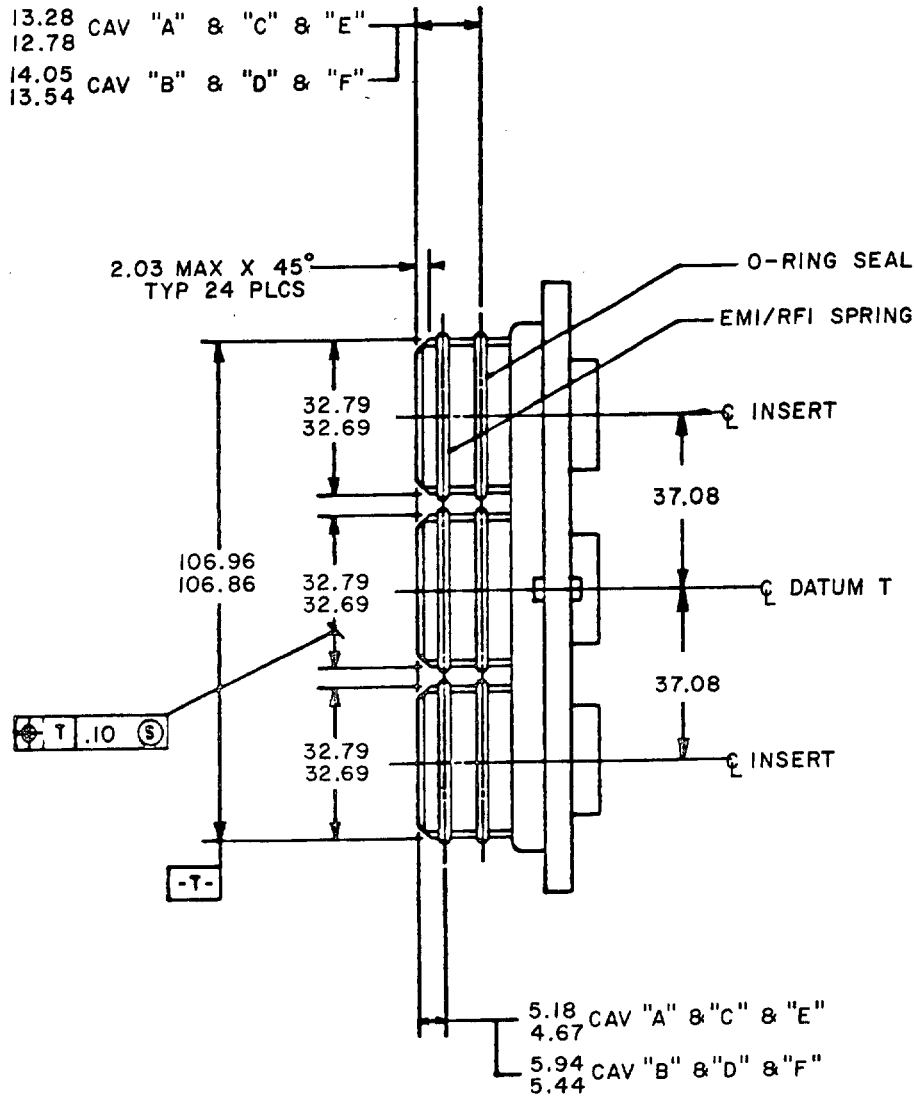

BOTTOM VIEW

FIGURE 1. Connector, plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

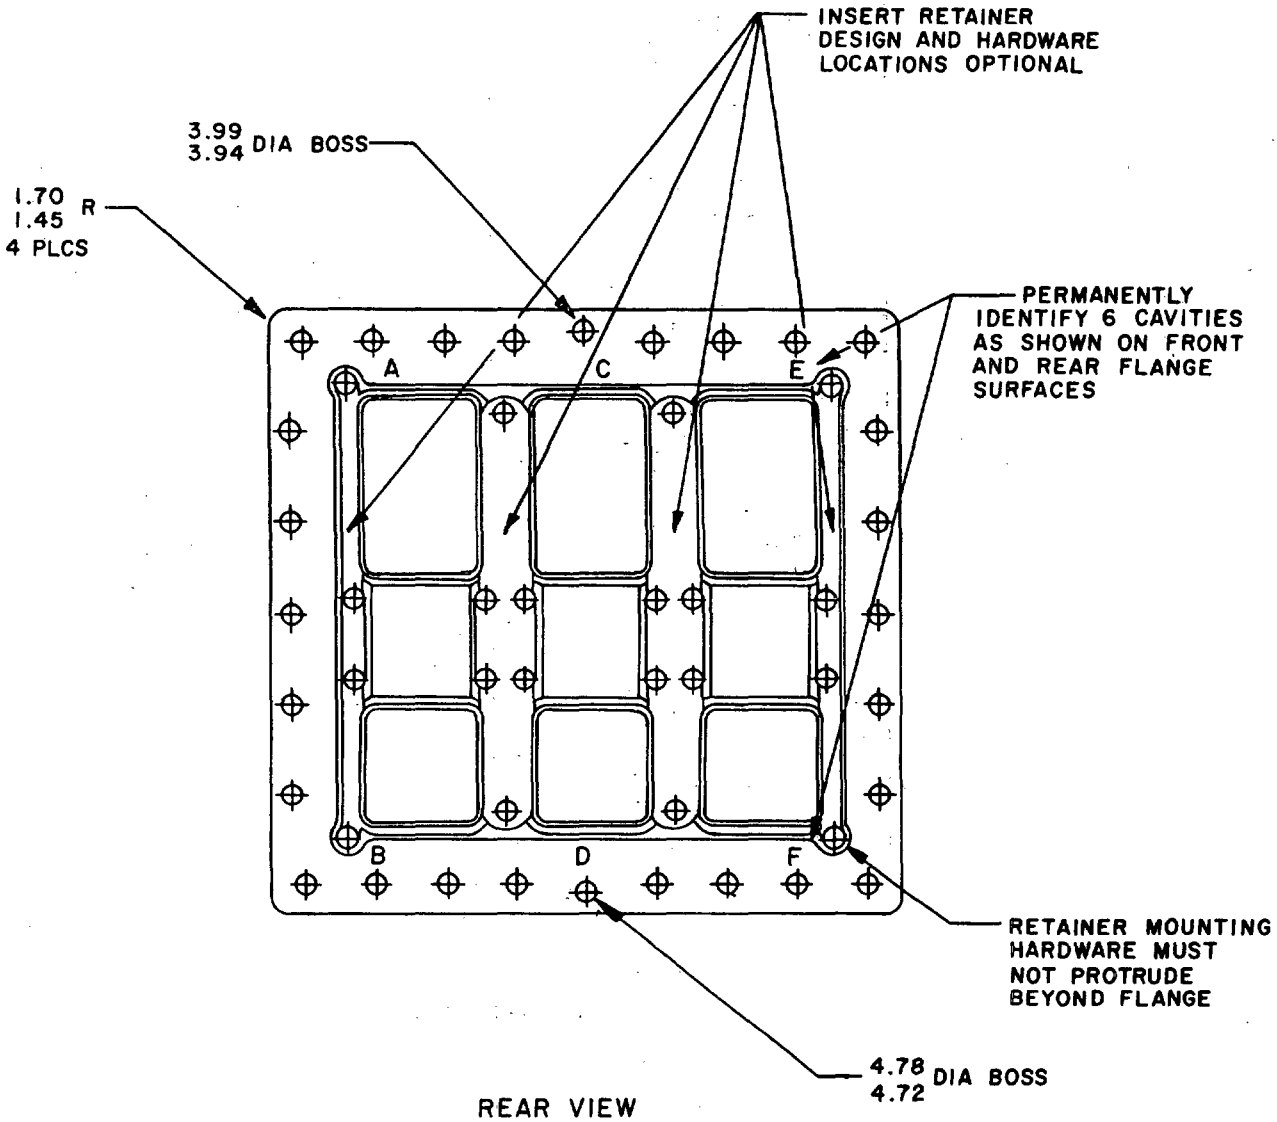

REAR VIEW

TABLE I

Size 22 Contact Cavity TP Requirements

	DATUM S				
DATUM T	100.61	100.58	100.56	100.53	100.51
106.96 (4.211)	.30 (0.012)	.28 (0.011)	.25 (0.010)	.23 (0.009)	.20 (0.008)
106.93 (4.210)	.28 (0.011)	.25 (0.010)	.23 (0.009)	.23 (0.009)	.20 (0.008)
106.91 (4.209)	.25 (0.010)	.23 (0.009)	.23 (0.009)	.20 (0.008)	.18 (0.007)
106.88 (4.208)	.23 (0.009)	.20 (0.008)	.20 (0.008)	.18 (0.007)	.18 (0.007)
106.86 (4.207)	.20 (0.008)	.18 (0.007)	.18 (0.007)	.18 (0.007)	.15 (0.006)

FIGURE 1. Connector, plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

MM	INCH	MM	INCH	MM	INCH	MM	INCH
0.15	.006	3.96	.156	18.67	.735	45.14	1.777
0.18	.007	3.99	.157	19.18	.755	45.24	1.781
0.20	.008	4.67	.184	20.19	.795	57.78	2.275
0.25	.010	4.72	.186	20.70	.815	60.96	2.4
0.38	.015	4.78	.188	21.08	.830	61.85	2.435
0.58	.023	4.93	.194	24.76	.975	80.90	3.185
.76	.030	5.13	.202	27.69	1.090	100.51	3.957
1.02	.040	5.18	.204	27.74	1.092	100.61	3.961
1.45	.057	5.44	.214	28.24	1.112	100.84	3.970
1.70	.067	5.46	.215	32.69	1.287	106.86	4.207
1.78	.070	5.84	.230	32.79	1.291	106.96	4.211
1.83	.072	5.94	.234	33.27	1.310	109.88	4.326
2.03	.080	8.26	.325	33.76	1.329	110.13	4.335
2.16	.085	10.80	.425	33.96	1.337	116.05	4.569
2.54	.1	12.78	.503	34.06	1.341	116.31	4.579
2.62	.103	13.28	.523	34.26	1.349	120.09	4.728
2.67	.105	13.54	.533	37.08	1.460	130.81	5.15
3.07	.121	14.05	.553	40.39	1.590	130.96	5.156
3.71	.146	16.10	.634	41.02	1.615	131.32	5.170
3.94	.155	17.91	.705	41.28	1.625	131.47	5.176

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are in parentheses.
3. Inch equivalents are given for general information only.

FIGURE 1. Connector, plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Dimensions and configuration: Shall be in accordance with figure 1.

Contacts: See MIL-C-39029/93, /94, /95, /98, and /100.

Inserts: See DOD-STD-1842 and DOD-C-83527.

Mating connector: See DOD-C-83527/6.

Military part number:

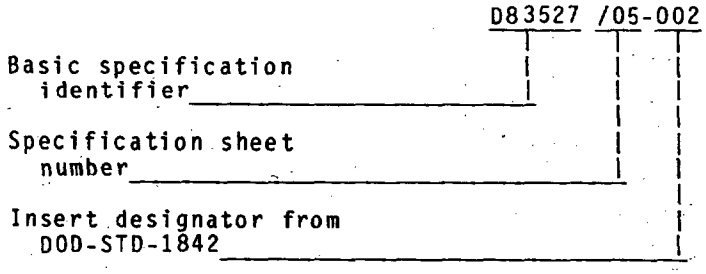

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3413-7)

☆U.S. GOVERNMENT PRINTING OFFICE: 1985—505-038/22670

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.